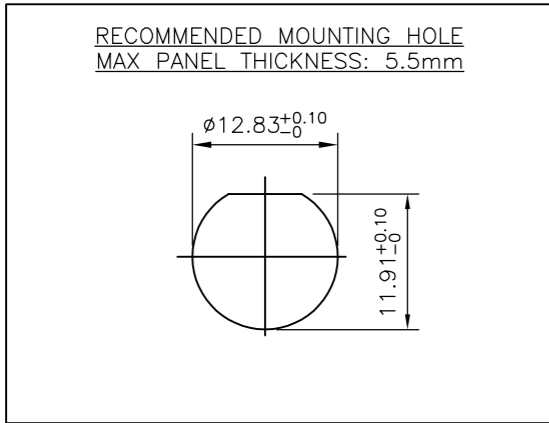
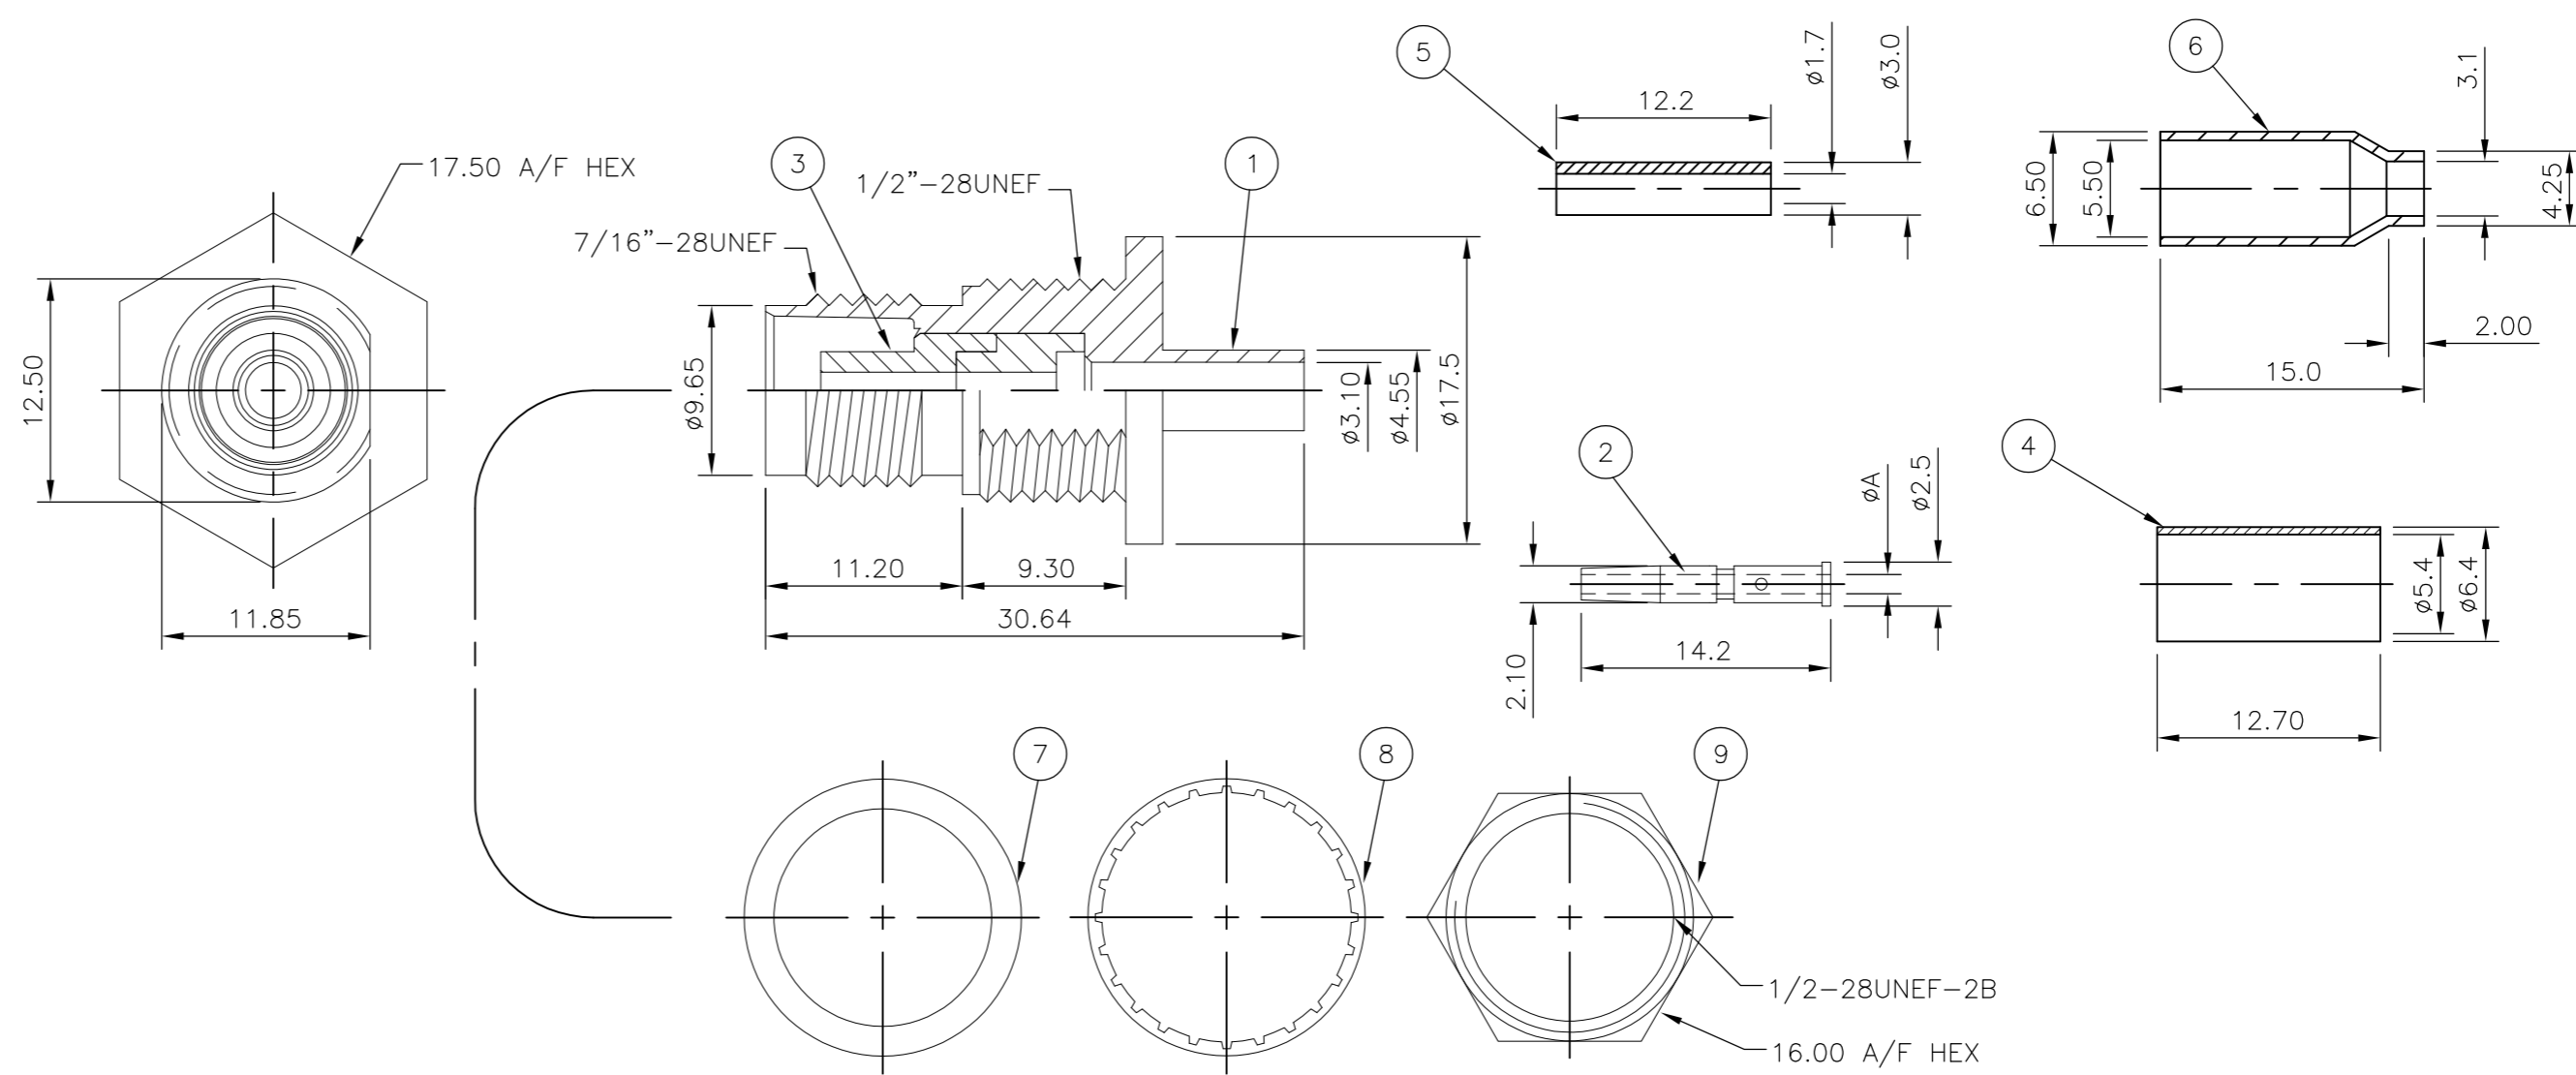


LOC	DIST	REVISIONS		
		P	LTR	DESCRIPTION
E	B	D		ECO-13-012122
				13NOV2013 RZ MY

- NOTES**
- PACKAGE ONE COMPLETE CONNECTOR IN HEAT SEALED, LABELED BAG/ 50 BAGS PER INNER BOX/ 20 BOXES PER SHIPPING CARTON (TOTAL 1000 PCS PER SHIPPING CARTON)
 - 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - Au PLATING
 - Ni PLATING
 - HAND TOOL: 9-1478240-0
 - DIE SET: SEE TABLE
 - ELECTRICAL CHARACTERISTICS
 FREQUENCY RANGE: DC - 4 GHz
 NOMINAL IMPEDANCE: 50 Ohm
 INSULATION RESISTANCE: 5000 MOhm
 WORKING VOLTAGE: 500 Volts RMS at Sea Level
 DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 CONTACT RESISTANCE:
 CENTRE CONTACT: 1.50 mOhm Max
 OUTER CONTACT: 1.00 mOhm Max
 VSWR @ 4GHz: 1.30:1 Max
 INSERTION LOSS dB @ x 3 GHz: 0.20 Max
 - MECHANICAL CHARACTERISTICS
 CABLE RETENTION FORCE: RG58C/U: 170N Min
 CABLE RETENTION FORCE: RG174A/U: 85N Min
 MOUNT NUT RECOMMENDED TORQUE: 4N
 DURABILITY: 50 Cycles Min
 - ENVIRONMENTAL CHARACTERISTICS
 OPERATING TEMPERATURE: -65 to +85 DegC
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

	1.1	9-1478242-0	RG58C/U, 141A/U, 303/U, URM43, 76, BELDEN 9907, KX15	5-1814802-3
OBSOLETED	1.1	9-1478242-0	RG58C/U, 141A/U, 303/U, URM43, 76, BELDEN 9907, KX15	5-1814802-2
	0.57	9-1478242-0	RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A	5-1814802-1
	0.57	9-1478242-0	RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A	5-1814802-0
DIMENSIONS	A	DIE SET	CABLE GROUPS	PART NO.



		OBSOLETE	OBSOLETE	OBSOLETE			
	1	1	1	1	BRASS	HEXAGON NUT	9
	1	1	1	1	PHOSPHOR BRONZE	WASHER	8
	1	1	1	1	SILCON RUBBER	GASKET	7
	-	-	-	1	BRASS	FERRULE	6
	-	-	-	1	NYLON	PUSHER SLEEVE	5
	1	1	-	-	BRASS	FERRULE	4
	1	1	1	1	DELIRIN	INSULATOR	3
	1	1	1	1	PHOSPHOR BRONZE	CONTACT	2
	1	1	1	1	ZINC ALLOY	BODY	1
	5	35	25	15	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ±
 1 PLC ±
 2 PLC ±
 3 PLC ±
 4 PLC ±
 ANGLES ±

MATERIAL: SEE TABLE

FINISH: SEE TABLE

W. SANDWELL 26SEP06
 S. PARLOW 26SEP06
 F. WHEELER-KING 26SEP06

108-112000
 SEE SHEET 2

TE Connectivity
 TNC BULKHEAD CRIMP JACK - 50 OHM

SIZE: A2
 CAGE CODE: 00779
 DRAWING NO: 1814802

RESTRICTED TO: -

CUSTOMER DRAWING

SCALE: NTS

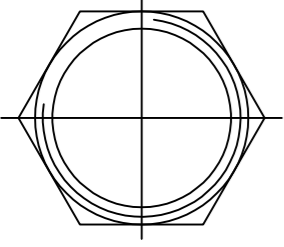
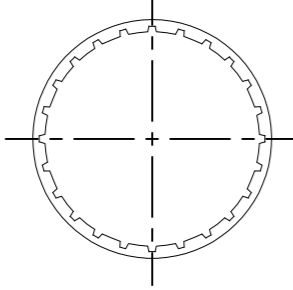
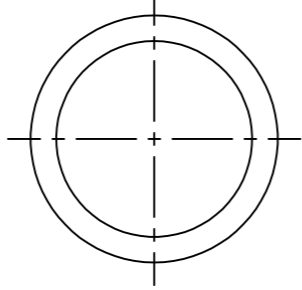
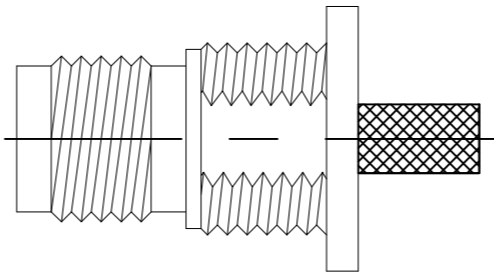


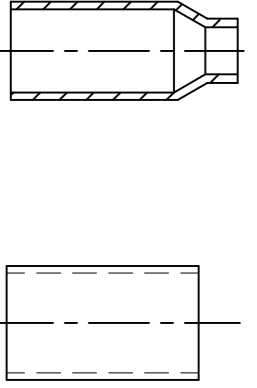
SHEET: 1 OF 2

REV: D

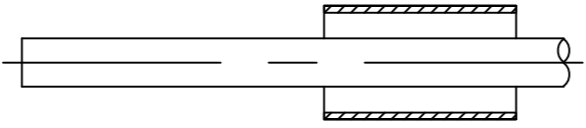
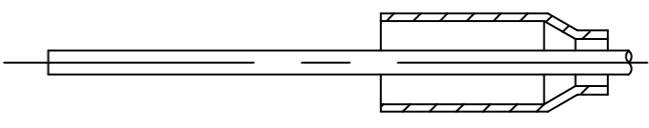
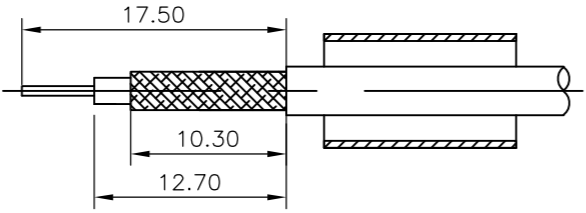
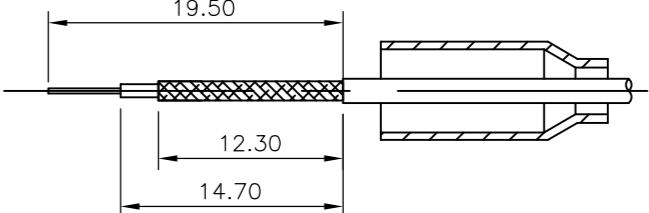
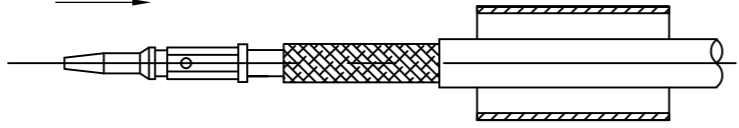



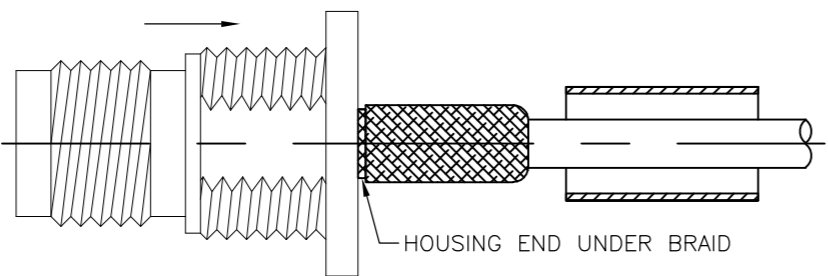
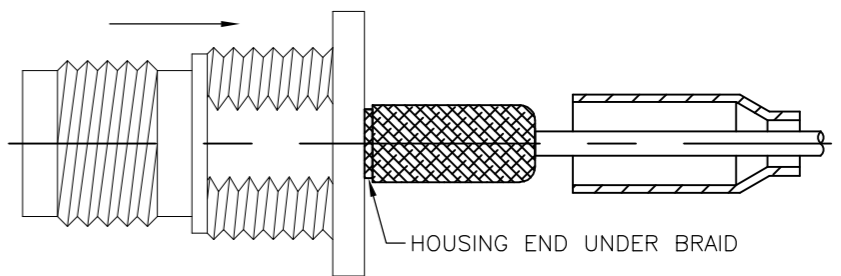
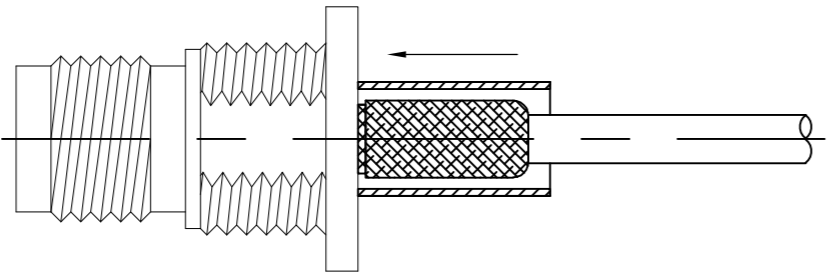

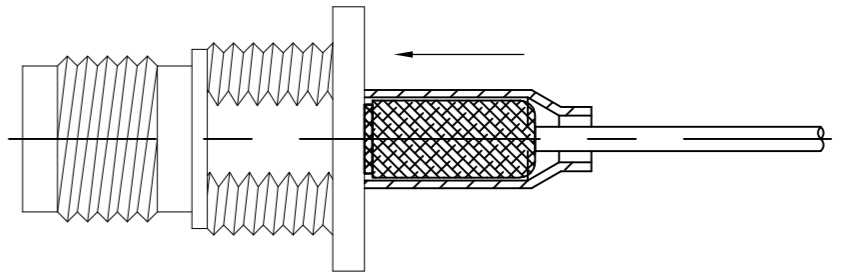

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEPTEMBER, 2004.
 © COPYRIGHT 2006 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B	-	-	SEE SHEET 1	-	-	-

COMPONENTS

HEX NUT (ITEM 9)	LOCK WASHER (ITEM 8)	GASKET (ITEM 7)	MAIN BODY (ITEM 1,3,)	CENTRE CONTACT (ITEM 2)	PUSHER SLEEVE (ITEM 5)	CRIMP FERRULES (ITEM 4 & 6)
						

ASSEMBLY INSTRUCTION

CABLES: RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53, RG58C/U, 141A/U, URM43, 76, BELDEN 9907, KX 15	CABLES: RG179B/U, 187A/U, URM111
<p>STEP 1</p> <p>1. SLIDE METAL CRIMP FERRULE OVER CABLE</p> 	<p>STEP 1</p> <p>1. SLIDE METAL CRIMP FERRULE OVER CABLE</p> 
<p>STEP 2</p> <p>1. STRIP CABLE TO DIMENSIONS AS SHOWN</p> 	<p>STEP 2</p> <p>1. STRIP CABLE TO DIMENSIONS AS SHOWN</p> 
<p>STEP 3</p> <p>1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 2. CRIMP USING TOOL AS NOTES ON PAGE 1.</p>  <p>RECOMMENDED CENTRE CONTACT A/F HEX</p> 	<p>STEP 3</p> <p>1. SLIDE ITEM 10 PUSHER SLEEVE OVER DIELECTRIC BEFORE FITTING THE CONTACT. 2. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 3. CRIMP USING TOOL AS NOTES ON PAGE 1.</p>  <p>RECOMMENDED CENTRE CONTACT A/F HEX</p> 
<p>STEP 4</p> <p>1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID.</p>  <p>HOUSING END UNDER BRAID</p>	<p>STEP 4</p> <p>1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE PUSHER SLEEVE AND CABLE BRAID.</p>  <p>HOUSING END UNDER BRAID</p>
<p>STEP 5</p> <p>1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE HOUSING BODY. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION X IS:- RG59B (SEE PAGE 1 FOR FULL CABLE LIST) = 6.50 RG58C/U (SEE PAGE 1 FOR FULL CABLE LIST) = 5.60</p>  <p>RECOMMENDED CRIMP SLEEVE A/F HEX</p> 	<p>STEP 5</p> <p>1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE BODY HOUSING. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION AS SHOWN.</p>  <p>RECOMMENDED CRIMP SLEEVE A/F HEX</p> 

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	RITA ZUO	11 Mar 09
CHK	ANSON MA	11 Mar 09
APVD	BOB ZHAO	11 Mar 09
PRODUCT SPEC	108-112000	
APPLICATION SPEC	SEE SHEET 2	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

TNC BULKHEAD CRIMP JACK - 50 OHM

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 1814802 RESTRICTED TO: -

SCALE: NTS SHEET: 2 of 2 REV: D