



Circuit br.,3p syst./cable protect.






Powering Business Worldwide™

Part no.
Article no.


NZMN1-A125
259086

Delivery programme



Product range			Circuit-breaker
Protective function			System and cable protection Photovoltaic applications
Standard/Approval			IEC
Installation type			Fixed
Release system			Thermomagnetic release
Construction size			NZM1
Number of poles			3 pole
Standard equipment			Box terminal
Switching capacity			
400/415 V 50/60 Hz	I_{cu}	kA	50
Rated current = rated uninterrupted current			
Rated current = rated uninterrupted current	$I_n = I_u$	A	125
Setting range			
Overload trip			
	I_r	A	100 - 125
Short-circuit releases			
			
Non-delayed	$I_i = I_n \times$...		6 - 10
			

General

Standards			IEC/EN 60947
Protection against direct contact			Finger and back of hand proof to VDE 0106 Part 100
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		°C	
Ambient temperature, storage		°C	- 40 - + 80
Operation		°C	- 25 - + 70
Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27		g	20 (half-sinusoidal shock 20 ms)
Safe isolation to EN 61140			
Between auxiliary contacts and main contacts		V AC	500
between the auxiliary contacts		V AC	300
Weight		kg	1.046
Mounting position			

Mounting position			<p>Vertical and 90° in all directions</p>  <p>With residual-current release XF1: - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in adapter elements - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° left - NZM4, N4: vertical with remote operator: - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions</p>
Direction of incoming supply			as required
Degree of protection			
Device			In the operating controls area: IP20 (basic degree of protection)
Enclosures			With insulating surround: IP40, with door coupling rotary handle: IP66
Terminations			Tunnel terminal: IP10 Phase isolator and strip terminal: IP00
Other technical data (sheet catalogue)			Weight Temperature dependency, Derating Effective power loss

Circuit-breakers

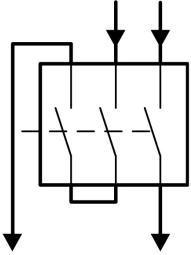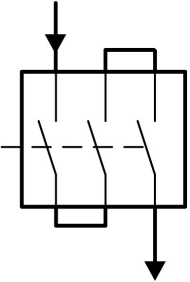Rated current = rated uninterrupted current	$I_n = I_u$	A	125
Rated surge voltage invariability	U_{imp}		
Main contacts		V	6000
Auxiliary contacts		V	6000
Rated operational voltage	U_e	V AC	690
Rated operational voltage	U_e	V DC	500
			<p>1) Details apply for 3 pole system protection circuit-breaker with thermomagnetic release NZMN(H)1(2)(3)-A... to 500 A.</p> <p>For rated operating voltage switching via 3 contacts:</p> <p>DC correction factor for instantaneous release response value: NZM1: 1.25, NZM2: 1.35, NZM3: 1.45</p> <p>Set value for I_i at DC = set value I_i AC/correction factor DC</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Switching of one pole via two series contacts</p>  </div> <div style="text-align: center;"> <p>Switching of one pole via three series contacts</p>  </div> </div>
Overvoltage category/pollution degree			III/3
Rated insulation voltage	U_i	V	690
Use in unearthed supply systems		V	≅ 690

Switching capacity

Rated short-circuit making capacity	I_{cm}		
240 V	I_{cm}	kA	187
400/415 V	I_{cm}	kA	105
440 V 50/60 Hz	I_{cm}	kA	74
525 V 50/60 Hz	I_{cm}	kA	40
690 V 50/60 H	I_c	kA	17
Rated short-circuit breaking capacity I_{cn}	I_{cn}		

Icu to IEC/EN 60947 test cycle 0-t-CO	I _{cu}	kA	
240 V 50/60 Hz	I _{cu}	kA	85
400/415 V 50/60 Hz	I _{cu}	kA	50
440 V 50/60 Hz	I _{cu}	kA	35
525 V 50/60 Hz	I _{cu}	kA	20
690 V 50/60 Hz	I _{cu}	kA	10
500 V DC	I _{cu}	kA	15
Ics to IEC/EN 60947 test cycle 0-t-CO-t-CO	I _{cs}	kA	
240 V 50/60 Hz	I _{cs}	kA	85
400/415 V 50/60 Hz	I _{cs}	kA	50
440 V 50/60 Hz	I _{cs}	kA	35
525 V 50/60 Hz	I _{cs}	kA	10
690 V 50/60 Hz	I _{cs}	kA	7.5
			Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.
Utilization category to IEC/EN 60947-2			A
Rated making and breaking capacity			
Rated operational current	I _e	A	
AC-1			
380 V 400 V	I _e	A	160
415 V	I _e	A	125
690 V	I _e	A	160
AC--3			
380 V 400 V	I _e	A	125
415 V	I _e	A	125
660 V 690 V	I _e	A	125
DC - -1			
500 V DC	I _e	CSA	125
DC - 3			
500 V DC	I _e	CSA	125
Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)	Operations		20000
Lifespan, electrical			
AC-1			
400 V V 50/60 Hz	Operations		10000
415 V V 50/60 Hz	Operations		10000
690 V 50/60 Hz	Operations		7500
AC--3			
400 V 50/60 Hz	Operations		7500
415 V 50/60 Hz	Operations		7500
690 V 50/60 Hz	Operations		5000
DC - -1			
500 V DC		Operations	10000
DC - 3			
500 V DC	Operations		5000
Max. operating frequency		Ops/h	120
Current heat losses per pole at I _u are based on the maximum rated operational current of the frame size.		W	16.7
			For current heat loss per pole the specification refers to the maximum rated operational current of the frame size.
Total downtime in a short-circuit		ms	< 10
Terminal capacity			
Standard equipment			Box terminal


Overview				Basic equipment				
				Box terminal	●	-	-	-
				Screw connection	-	●	●	●
				Accessories				
				Box terminal	-	●	●	-
				Screw connection	●	-	-	●
				Tunnel terminal	●	●	●	●
				Connection on rear Flat conductor terminal	●	●	●	●
					-	-	-	●
Round copper conductor								
Box terminal								
Solid			mm ²	1 x (10 - 16) 2 x (6 - 16)				
Stranded			mm ²	1 x (25 - 70) 2 x 25				
Tunnel terminal								
Solid			mm ²	1 x (16 - 95)				
Stranded			mm ²					
Stranded			mm ²	1 x (25 - 95)				
Bolt terminal and rear-side connection								
Direct on the switch								
Solid			mm ²	1 x (10 - 16) 2 x (6 - 16)				
Stranded			mm ²	1 x (25 - 70) 2 x 25				
Al conductors, Cu cable								
Solid			mm ²	1 x 16				
Stranded			mm ²					
Stranded			mm ²	1 x (25 - 95)				
Cu strip (number of segments x width x segment thickness)								
Box terminal								
		min.	mm ²	2 x 9 x 0.8				
		max.	mm ²	9 x 9 x 0.8				
Copper busbar (width x thickness)		mm						
Bolt terminal and rear-side connection								
Screw connection						M8		
Direct on the switch								
		min.	mm ²	12 x 5				
		max.	mm ²	16 x 5				
Control cables								
			mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)				


Technical data ETIM 4.0


Rated permanent current I _u		A	125
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz		kA	50
Setting range overload protector		A	100 - 125
Adjustment range short-term delayed short-circuit release		A	0 - 0
Adjustment range undelayed short-circuit release		A	750 - 1250
Integrated earth fault protection			No
Connection type main current circuit			Frame clamp
Device construction			Built-in device fixed built-in technique

Suitable for DIN rail (top hat rail) mounting		No
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Switched-off indicator available		No
With under voltage release		No
Number of poles		3
Position of connection for main current circuit		Front connection
Type of control element		Rocker lever
Motor drive optional		No
Motor drive integrated		No
Degree of protection (IP)		IP20



Characteristics

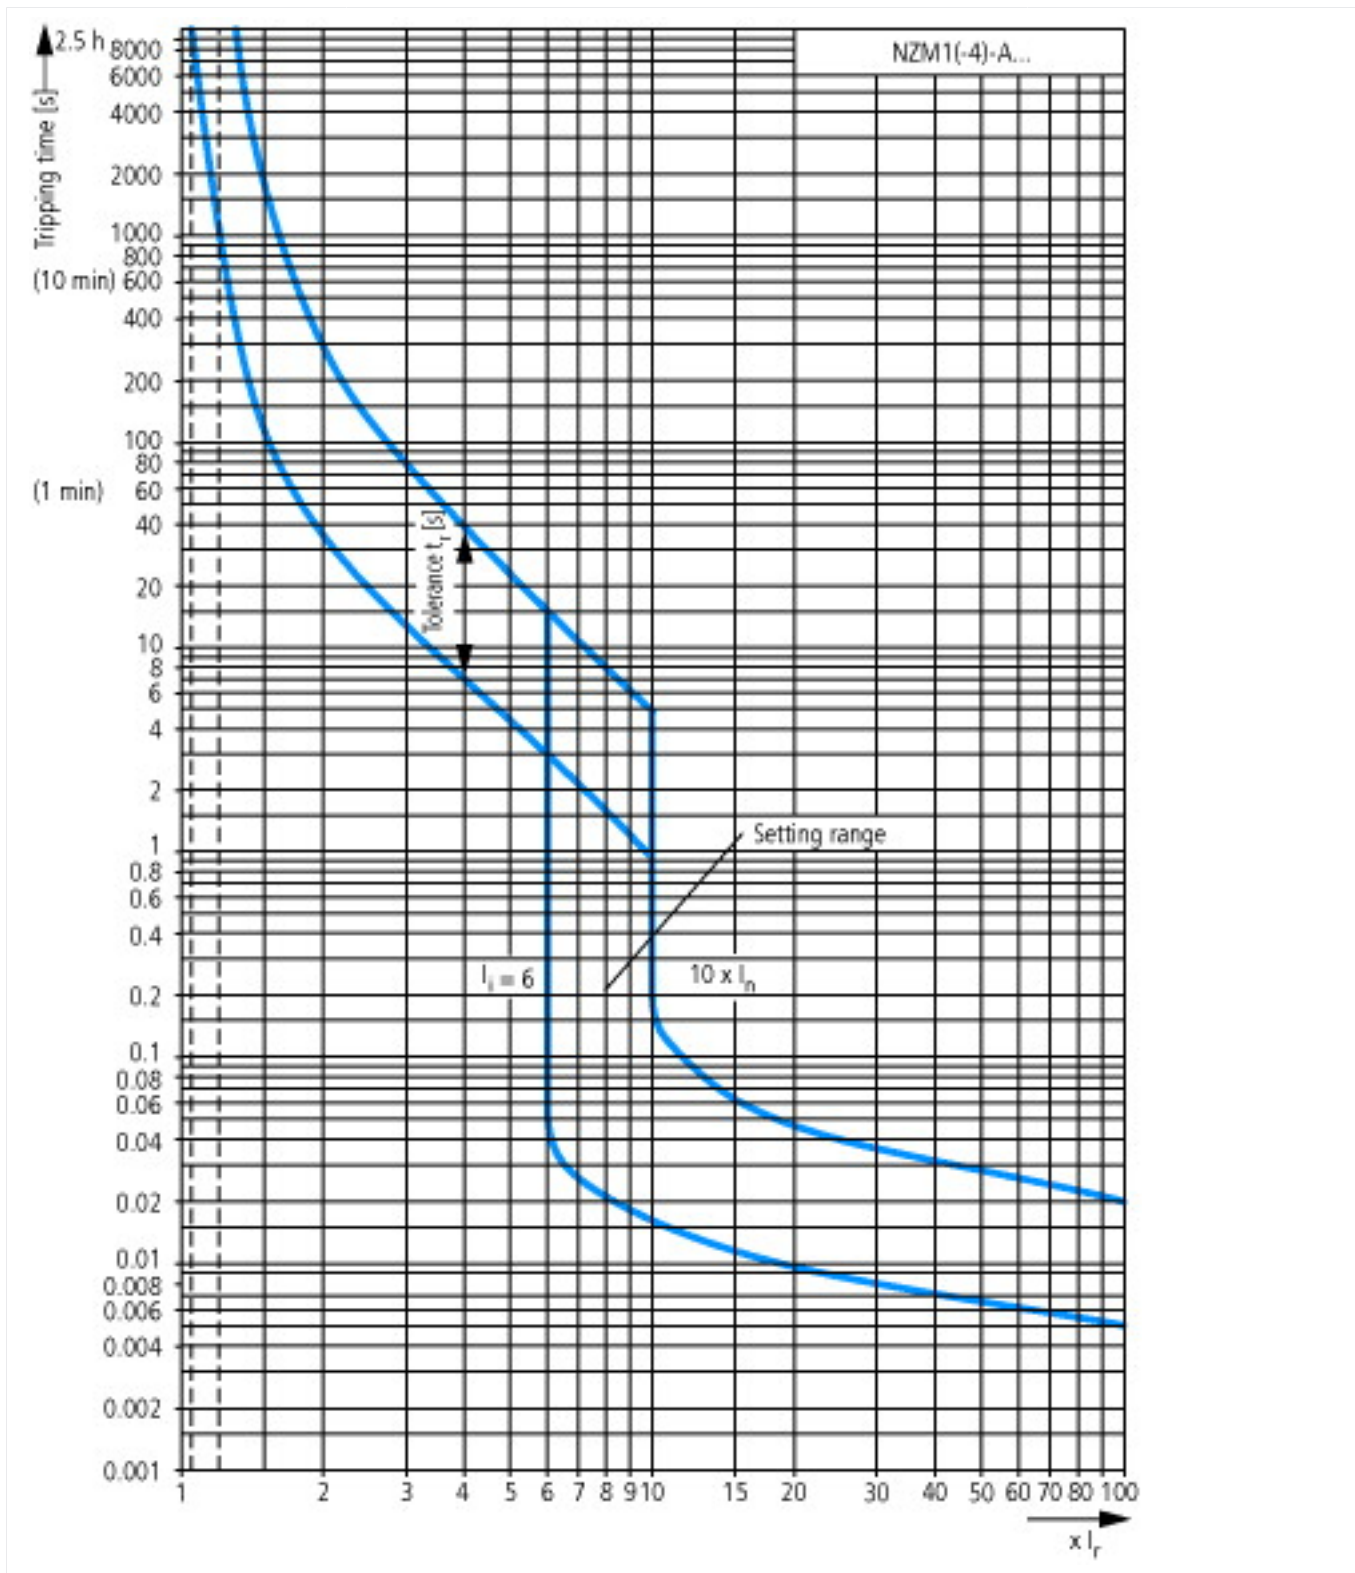

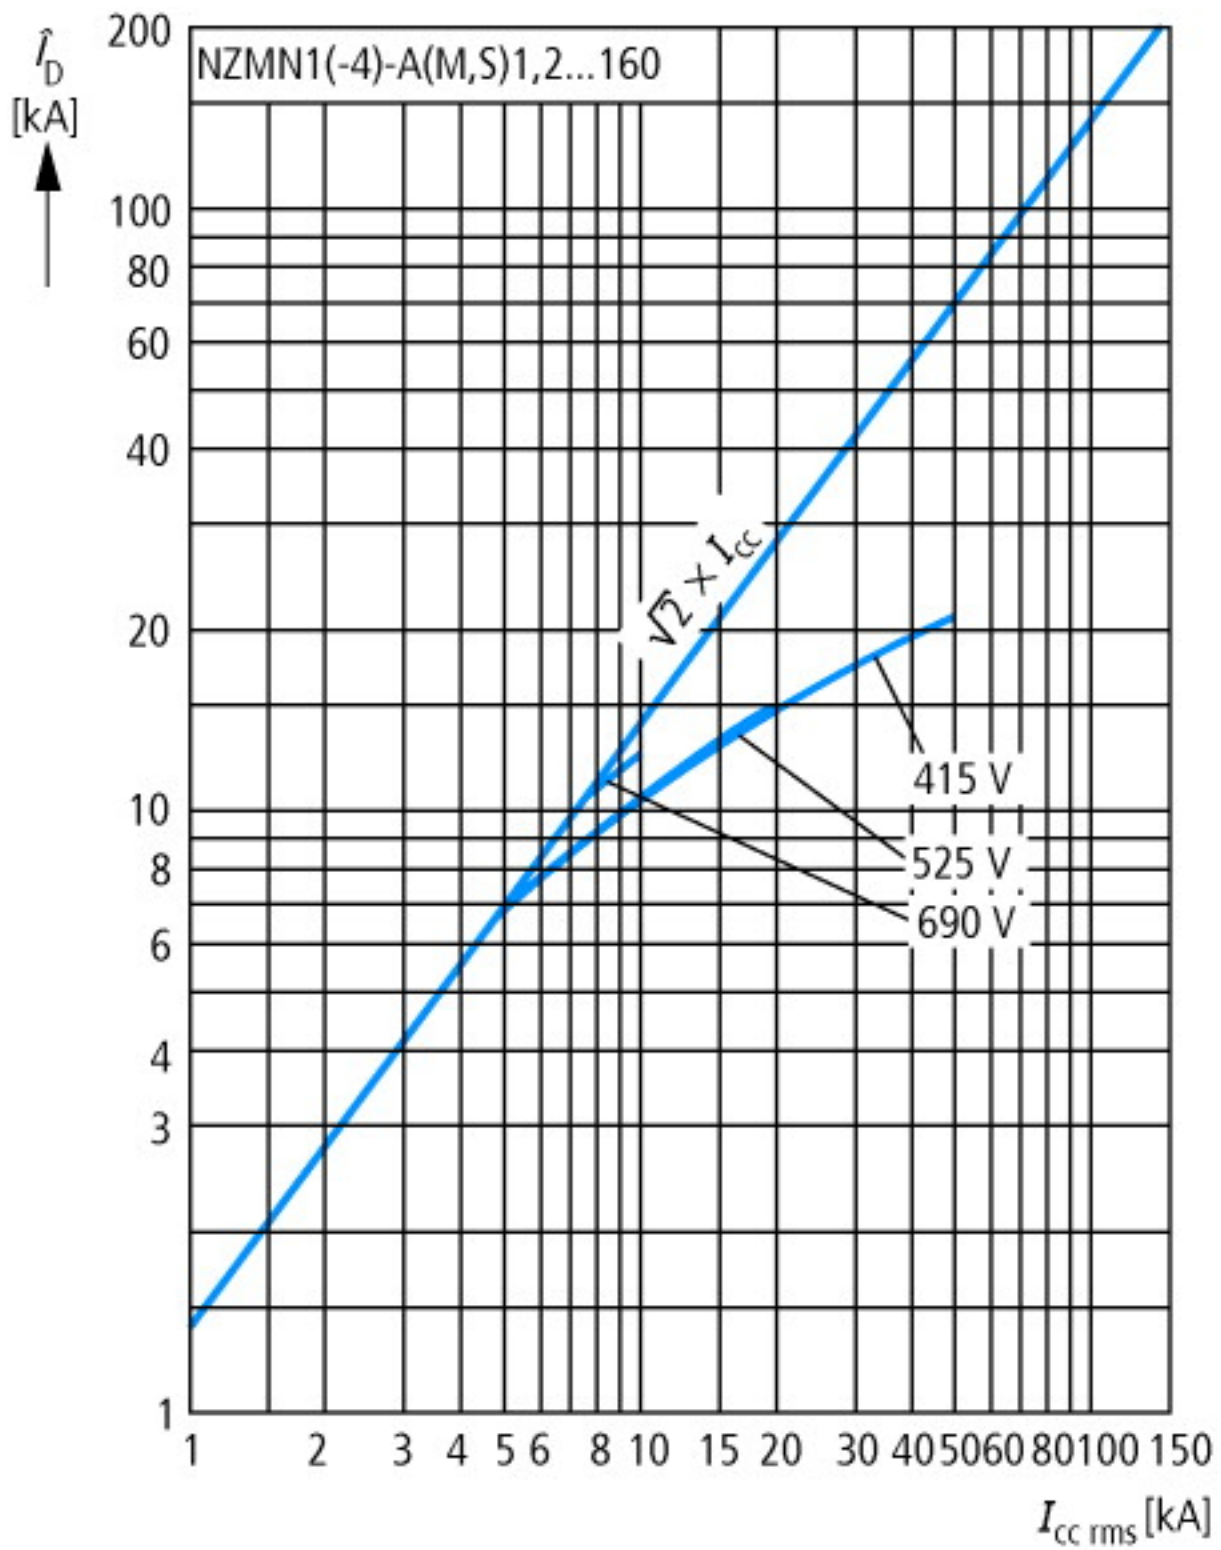


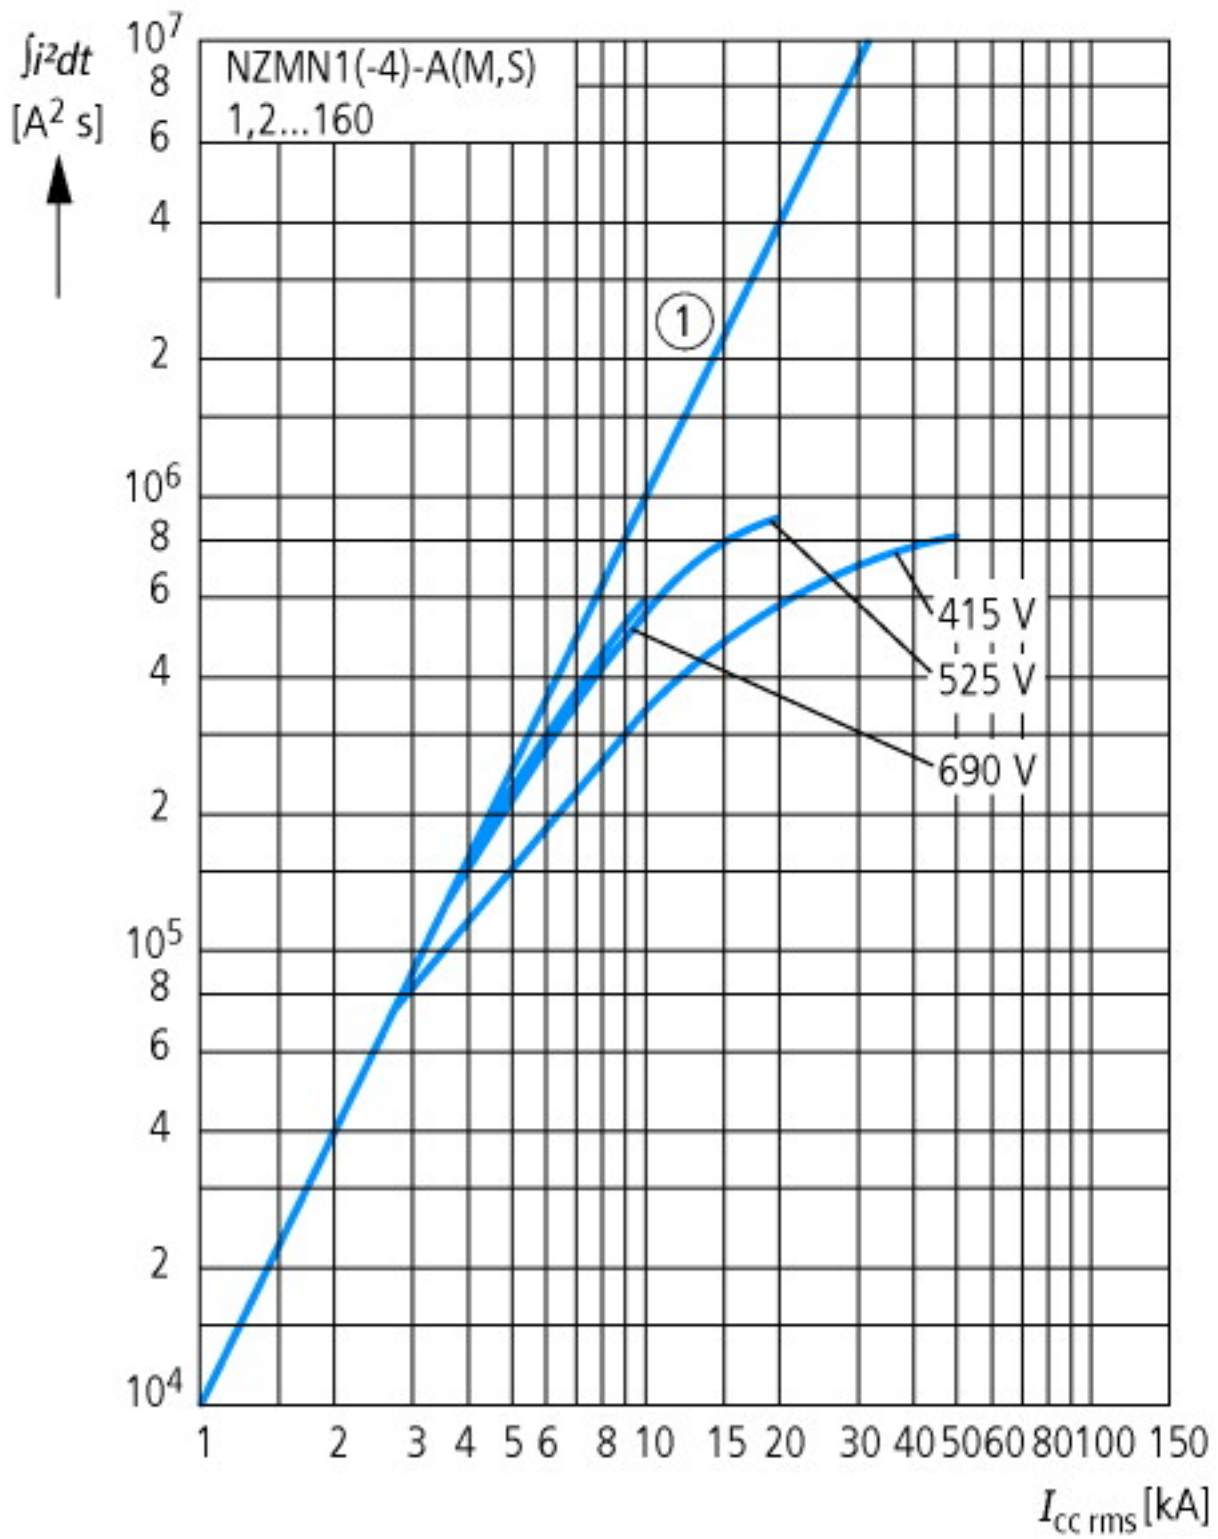

Dimensions

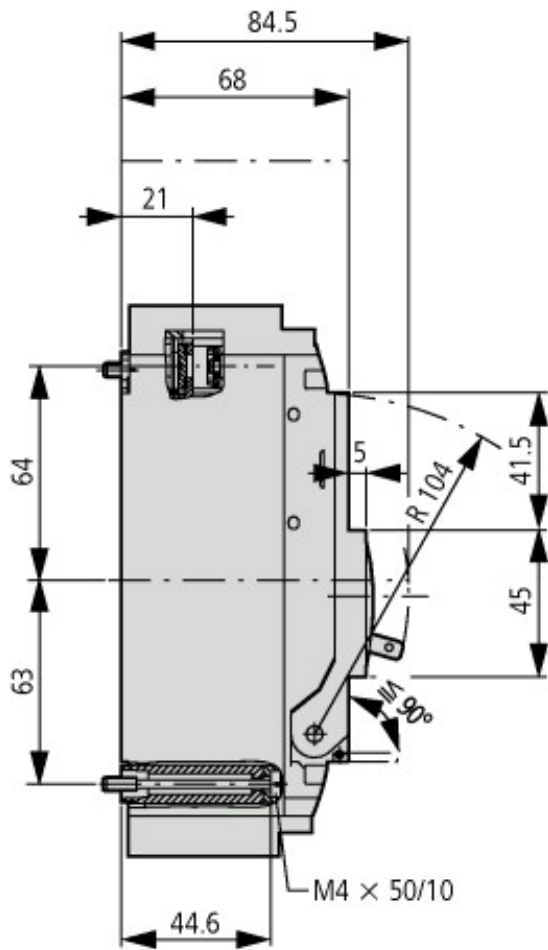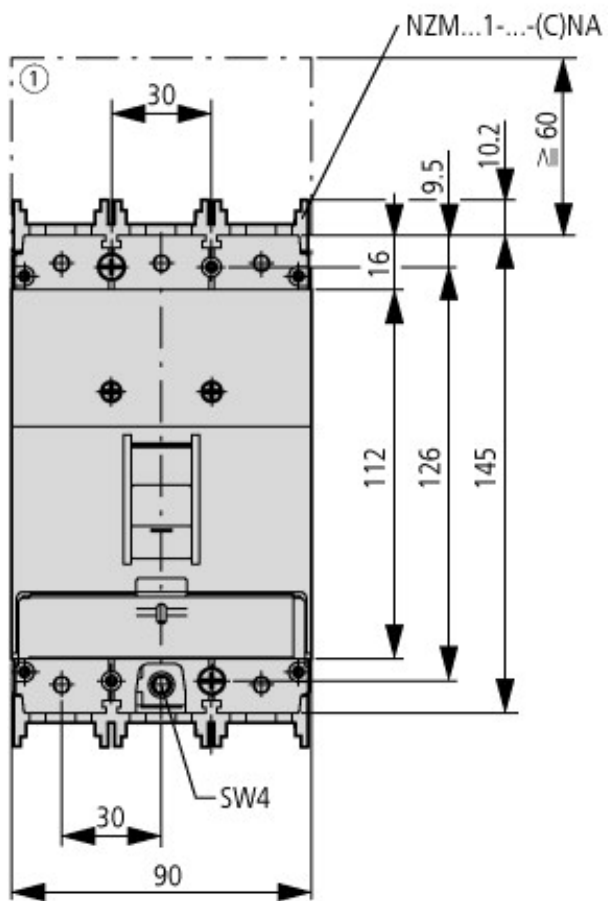

① Blow out area, minimum clearance to adjacent parts

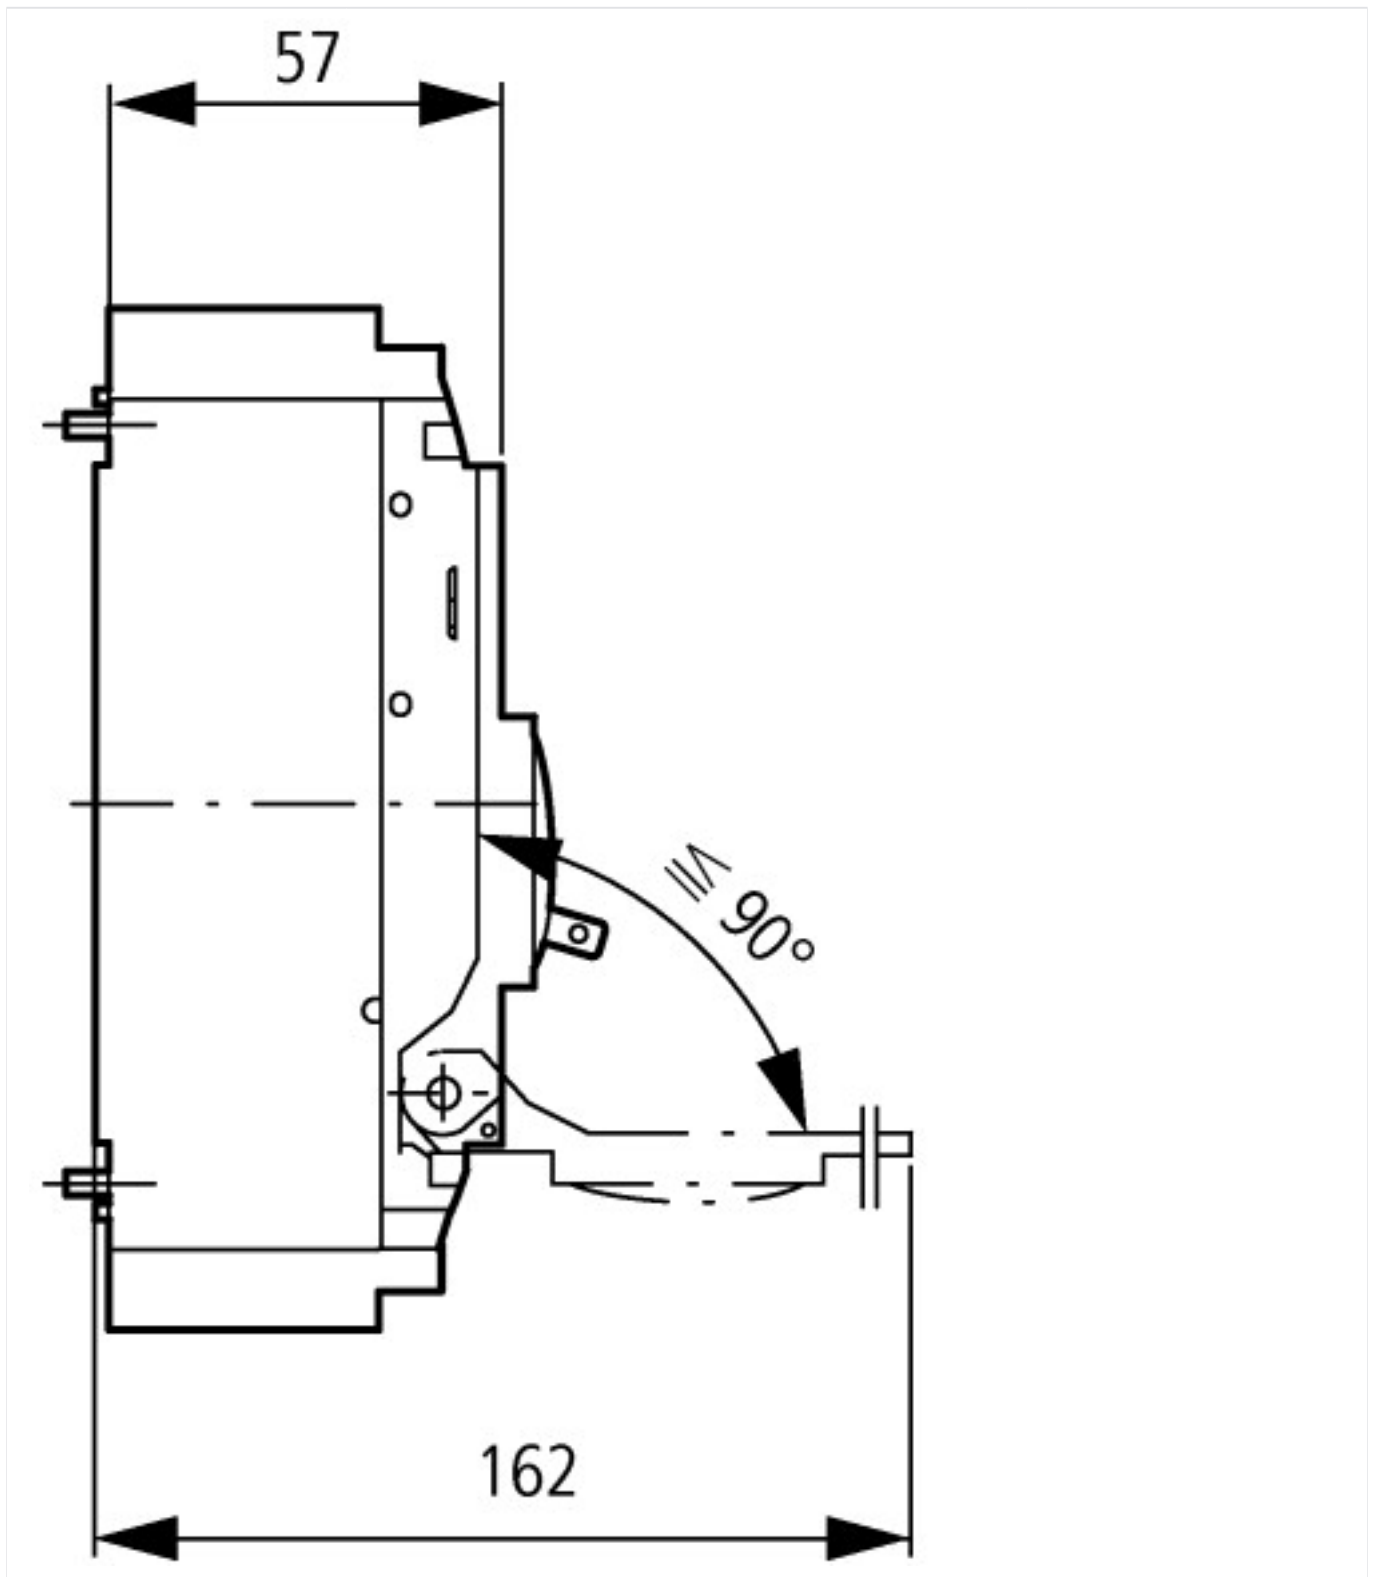

Additional product information (links)

IL01203004Z (AWA1230-1913) Circuit-breaker, Switch-Disconnecter

IL01203004Z (AWA1230-1913) Circuit-breaker, Switch-Disconnecter

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01203004Z2012_03.pdf

Setting-Specific Representation of Tripping Characteristics and Competent Assessment of their Interaction

http://www.moeller.net/binary/ver_techpapers/ver943en.pdf

Busbar Component Adapters for modern Industrial control panels

http://www.moeller.net/binary/ver_techpapers/ver960en.pdf