Han® 3 A RJ45

Han® 3 A RJ45 device side

Advantages

- Simple mounting
- RJ45 plug-compatible
- Different versions cover all applications
- Coding (4 variants) possible

Technical characteristics

Number of ports Copper / termination	2 / 1x Han® 3 A RJ45 (IP 65 / IP 67) 1x RJ45 (IP 20)
Transmission performance	Category 5 / Class D up to 100 MHz acc. to ISO/IEC 11 801:2002, EN 50 173-1
Transmission rate	10/100/1000 Mbit/s
Shielding	fully shielded, 360° shielding contact
Mounting	screw-on type on steel plate walls
Degree of protection	IP 65 / IP 67
Mating cycles	min. 500
Temperature range	-40 °C … +70 °C
Housing material Plastic version Metal version	 Polycarbonate, black, UL 94 V-0 Zinc die-cast, powder coating, grey

Identification	Part No.
Housing bulkhead mounting	
Plastic version, black	09 20 003 0327
Metal version Standard	09 20 003 0301
Metal version M	09 37 003 0301
with fixed cover and with seal Metal version Standard	09 20 003 0306
Adapter	
for fixing of RJ45 jack	
with fixing clip	09 45 515 0020
without fixing clip	09 45 515 0022
RJ45 jacks Cat. 5	
Solder variant SMD, 90° angled	09 45 551 1100[1)] 09 45 551 1110[2)]
Solder variant overmolded, 90° angled	09 45 551 1102[1)]

Drawing — Dimensions in mm

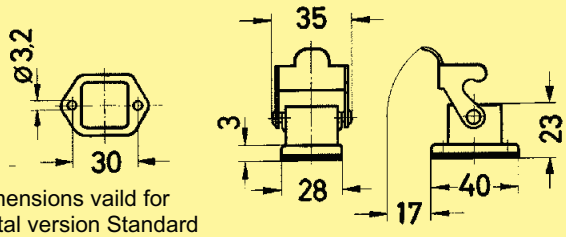

Dimensions vaild for Metal version Standard

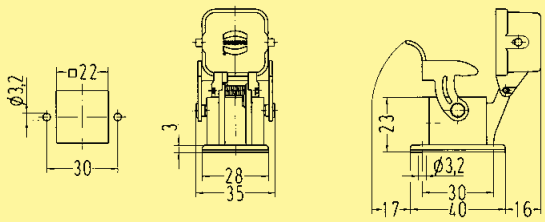

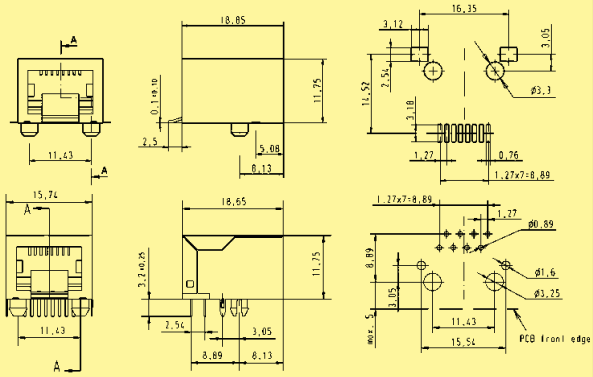

[1)] Packaging: Blister à 120 pieces
[2)] Packaging: Tape & Reel à 130 pieces