


Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 1 of 10 | | Date | Jan. 23, 2018 | |

● FUNCTIONS

- 1. Tilt Detecting within a 360° radius
- 2. Vibration Detecting

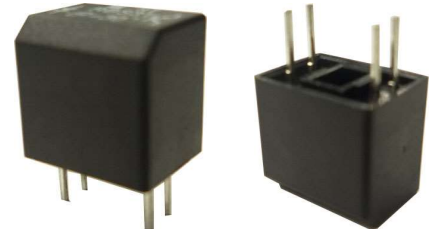

● APPLICATIONS

- 1. Rotation detection for LCD monitor
- 2. Automatically shut off for home appliances
- 3. Automatically shut off for Sporting equipment
- 4. Automatically shut off for motorbike
- 5. Alarm system
- 6. Anti-theft / Anti-tamper devices
- 7. Being motion detection (personal locator)
- 8. Wake up systems for power saving, such like remote controllers
- 9. Earthquake Detecting



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 2 of 10 | | Date | Jan. 23, 2018 | |

● FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, generating highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. Suitable to vertical PCB.
6. Tilt Angles: 15° within a 360° radius.
7. RoHS compliance, an ideal substitute for mercury switch.
8. A more economical tilt and vibration detection option than IC design solution.
9. All made in Taiwan and examined before shipment.

● PATENTS

1. Taiwan Patent No. I 310952
2. Taiwan Patent No. M 450817
3. USA Patent No. US 6,800,841 B1
4. USA Patent No. US 7,402,791 B2
5. China Patent No. ZL 200610083013.5
6. China Patent No. ZL 200820126206.9
7. China Patent No. ZL 201220539712.7
8. Japan Patent No. 4384217
9. Japan Patent No. 3148127



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 3 of 10 | | Date | Jan. 23, 2018 | |

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.25mm)

Table 1

| | |
|--|--|
| <p style="text-align: center;">RBS 31 11 13</p> | <p style="text-align: center;">Operation Angle Diagram</p> <p>[Tilt Angle : 15°±10°]</p> |
| <p style="text-align: center;">P.C.B. Layout(DIP)/Top View</p> | <p style="text-align: center;">Application Circuit</p> |



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 4 of 10 | | Date | Jan. 23, 2018 | |

● Current/Voltage Suggested

| Input Current (mA) | Operating Voltage (V) | Conditions |
|--------------------|-----------------------|---|
| 10 | 3.3 | V _{CE} =3.3V R _D =200 ohm R _L =33K ohm |
| 10 | 5 | V _{CE} =5V R _D =390 ohm R _L =33K ohm |

* Please refer to above Application Circuit for designing electrical circuit.

● Absolute Maximum Rating (Ta=25°C)

| Item | | Symbol | Rating | Unit |
|----------------------------|-----------------------------|------------------|---------|------|
| Input | Power Dissipation | Pd | 75 | mW |
| | Reverse Voltage | V _R | 5 | V |
| | Forward Current | I _F | 50 | mA |
| | Peak Forward Current (*1) | I _{FP} | 1 | A |
| Output | Collector Power Dissipation | P _C | 100 | mW |
| | Collector Current | I _c | 20 | mA |
| | C-E Voltage | V _{CEO} | 30 | V |
| | E-C Voltage | V _{ECO} | 5 | V |
| Operating Temperature | | Topr | -25~+85 | °C |
| Storage Temperature | | Tstg | -40~+85 | °C |
| Soldering Temperature (*2) | | Tsol | 260 | °C |

(*1) tw=100 μSec. 、 T=10 mSec.

(*2) t=5 Sec



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 5 of 10 | | Date | Jan. 23, 2018 | |

● Electrical Optical Characteristics (Ta=25°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|---------------|-----------------------------|------|------|------|-----------|
| Forward Voltage | V_F | $I_F=20mA$ | - | 1.2 | 1.5 | V |
| Reverse Current | I_R | $V_R=5V$ | - | - | 10 | μA |
| Peak Wavelength | λ_p | $I_F=10mA$ | | 940 | | nm |
| Dark Current | I_{ceo} | $V_{CE}=10V$ | - | - | 2 | μA |
| C-E Saturation Voltage | $V_{CE(sat)}$ | $I_C=0.25mA$ $I_F=20mA$ | - | - | 0.4 | V |
| Light Current | I_c | $V_{CE}=5V$ $I_F=20mA$ | 0.5 | 5 | - | mA |
| Rise Time | T_r | $I_C=0.8mA$ $V_{CC}=30V$ | - | 5 | - | μsec |
| Fall Time | T_f | $R_L=1K\Omega$ | - | 5 | - | μsec |



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 6 of 10 | | Date | Jan. 23, 2018 | |

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

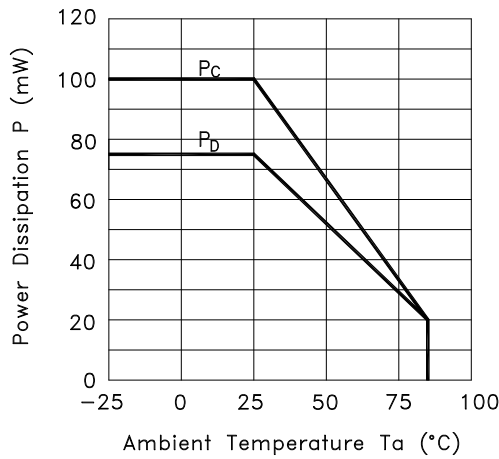


Fig.2 Forward Current vs. Forward Voltage

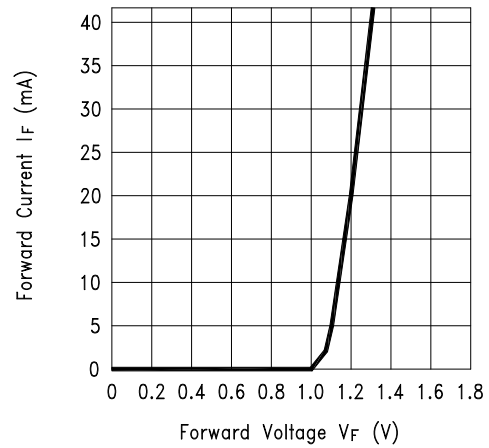


Fig.3 Collector Current vs. Collector-emitter Voltage


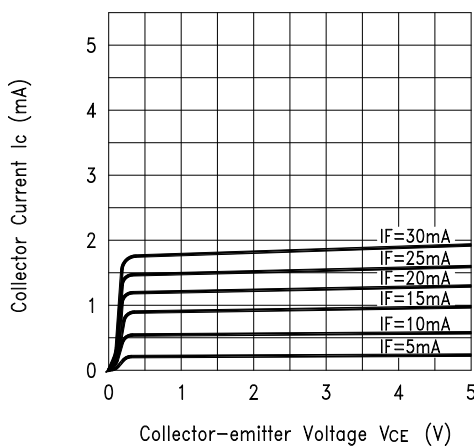


Fig.4 Collector Current vs. Ambient Temperature

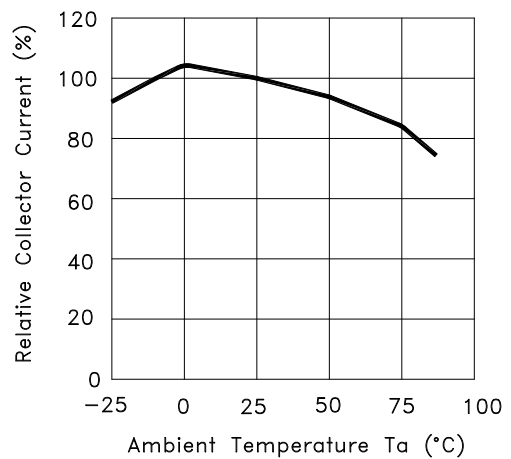

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 7 of 10 | | Date | Jan. 23, 2018 | |

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

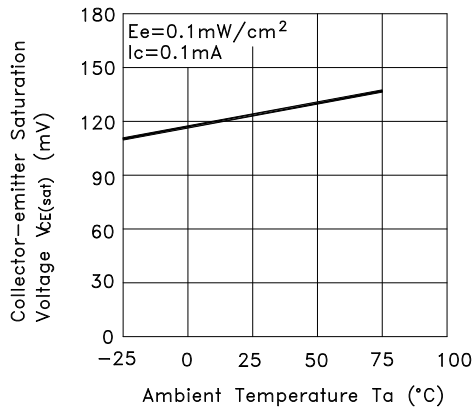


Fig.6 Response Time vs. Load Resistance



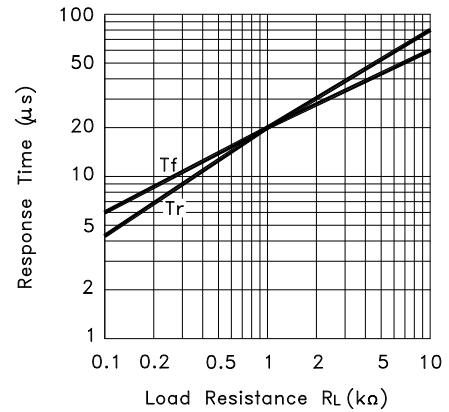


Fig.7 Sensing Position Characteristics (Typical)

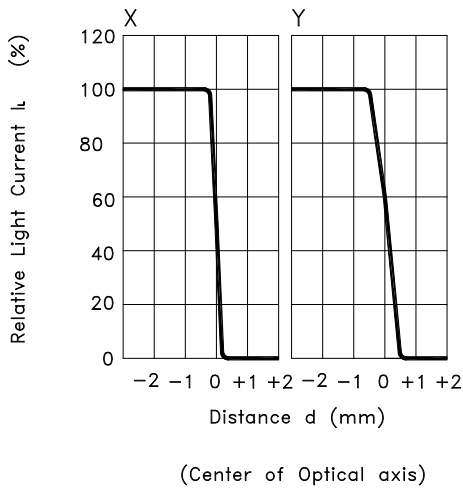

Test Circuit for Response Time

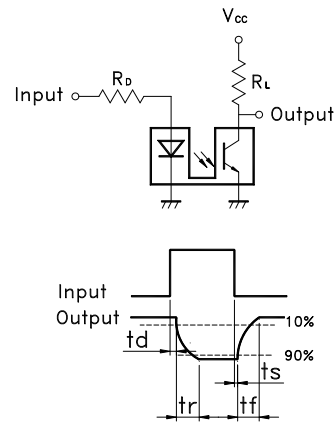

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 8 of 10 | | Date | Jan. 23, 2018 | |

● ELECTRICAL CHARACTERISTICS

| | | |
|---|-----------------------|------------------|
| 1 | Contact Rating | -- |
| 2 | Contact Resistance | -- |
| 3 | Angle Tolerance | Refer to Table 1 |
| 4 | Insulation Resistance | -- |
| 5 | Dielectric Strength | -- |
| 6 | Capacitance | -- |

● RELIABLE TEST ITEMS

| Test Item | Standard | Test Content |
|-----------------------|--|---|
| Operation Temperature | MIL-STD-202G, TEST METHOD 107G, TEST A | -25°C~85°C |
| Storage Temperature | MIL-STD-202G, TEST METHOD 107G, TEST A | -40°C ~85°C |
| Humidity | MIL-STD-202G, TEST METHOD 103B | 40°C /95%RH |
| Mechanical Life | -- | 2Hz, horizontal 1,000,000 times |
| Electrical Life | MIL-STD-883E:1016 | I _F =20 mA, V _{CE} =5 V TIME: 30,000 hrs |



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 9 of 10 | | Date | Jan. 23, 2018 | |

● **SOLDERING CONDITION**


Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

| Condition Operation Method | Soldering Temperature | Soldering Time | Wattage of Manual Soldering | Suitable Production Process |
|-------------------------------|-----------------------|------------------|--|-----------------------------|
| Wave Soldering | 260±5°C | < 5 seconds max. | - | DIP |
| Manual Soldering | 300±5°C | < 3 seconds max. | 30W or Temperature-controlled manual soldering | DIP |

● **PACKAGE**

| | Part Number | Package | Quantity | Total | Dimension(mm) |
|----|-------------|--------------|----------|------------|----------------|
| 1. | RBS311113 | IC tube | 48 pcs | 48 pcs | 525L*10W*17.5H |
| | | Inner box | 84 tubes | 4,032 pcs | 539L*130W*130H |
| | | Outer carton | 4 boxes | 16,128 pcs | 551L*285W*288H |

※ Package shown as below for reference.

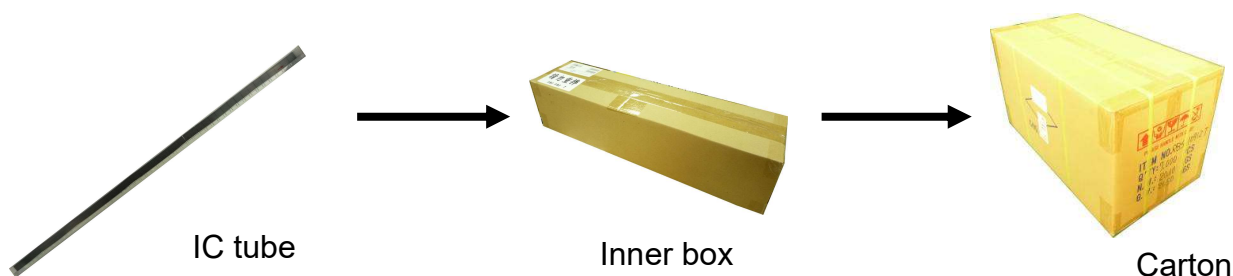

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------------|---------------|----|
| Item No. | RBS311113 | Description | Tilt Sensor Switch | Version | 11 |
| Page | 10 of 10 | | Date | Jan. 23, 2018 | |

● **NOTES**

1. Suggestion for usage: For vibration usage or application, we suggest to add hysteresis for IC.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.

● **PRECAUTIONS FOR USE**

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Do not try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. When the soldering temperature exceeds specifications, the switch may fall apart.
5. Do not use switch in the environment of high humidity, because such an environment may cause the leakage current between the terminals.
6. Please do not exceed the rated load as there will be a risk of disabling the product function.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).
8. To prevent damaging IR and PT, please make electrostatic protective treatment, for example: wearing a conductive wrist strap or antistatic gloves during production process, and grounding machinery etc.

