

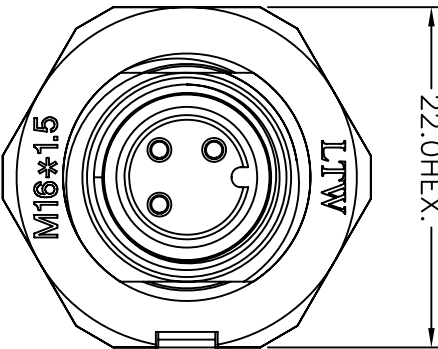
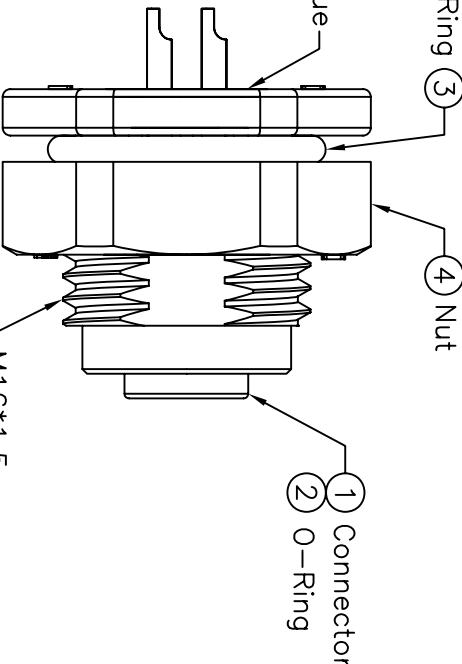
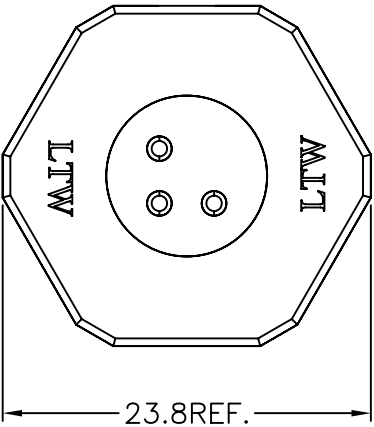
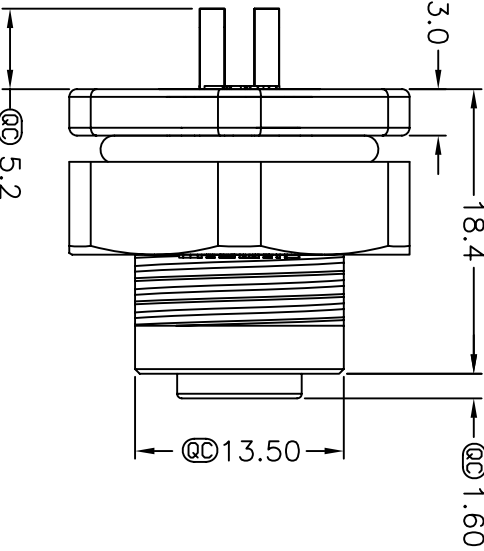


1	2	3	4	5	6	7	8
				REV. A	ECN NO. Initial Release	DATE 2010/09/14	SIGN Rex
				DESCRIPTION Change Rev.01 To Rev.A			





Pin Assignment
Front View

Recommended Panel Cut-Out

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

SCALE Free
REV. A

SIZE A4
SHEET 1 OF 1
@ Inspection Item

TITLE
M12 CONN.SOLDER
PANEL SCREW 3PIN F CONN F PIN

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO
LTW12P-03PFFS-SF8001

DWG NO
LTW12P-03PFFS-SF8001

CUSTOMER

DRAWN BY
Rex

CHECKED BY
Winnie

APPROVED BY
Kevin

DATE
2010/09/17

DATE
2010/09/17

DATE
2010/09/17

ALTW
DCC. DEPT.
CONFIDENTIAL
2010.09.21
ISSUED

ALTW
CONFIDENTIAL
2010.09.14
R&D DEPT.

Note:

- * @Important Dimension To Check.
- * Waterproof Rate: IP68(水深1米, 24hrs)
- * Connector: Nylon+GF, 94V-0, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Shield: Nylon+GF, 94V-0, Black
- * Nut: Nylon+GF, 94V-0, Black
- * O-Ring(Inner): Silicone, Gray, 94V-0
- * O-Ring(Outer): Silicone, Gray, 94V-0
- * For Panel Thickness Max 4.0mm

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

8 FAWM0702-01-01A2