




***For even milling with automatic feed. Switchable to manual operation.***

## ***Automatic universal axial feed AV/E***

**For the X axis of the Miller FF 500/BL. Will also fit the predecessor compound table KT 400 and the Miller FF 400.**

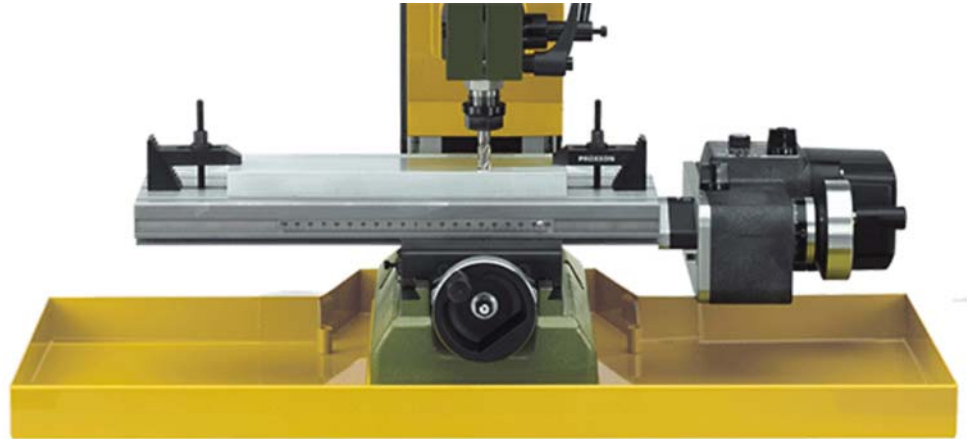

Simple assembly: The unit is mounted to the compound table with two bolts and automatically drives the spindle of the X-axis. For manual operation the handwheel needs to be mounted on the spindle of the drive-axis. Balanced special DC motor with electronic speed control (full-wave electronics). Manual drive with freewheeling function and two speed levels: Stage 1 for common machining (20 - 75mm/min). Stage 2: for machining at higher speed or quick adjustment of the X axis (90 – 260mm/min). Freewheeling function for manual operation by handwheel.

### **Technical data:**

230V. 100W. 50/60Hz. Spindle speeds 10 - 130rpm. Dimensions: H 120, W 170, D 210mm. Weight 3.5kg. Insulated to Class 1.

**NO 24 326**



See us on YouTube!

### **Note:**

The depicted miller not included in the scope of delivery.