

Wheel Nut Impact Socket Set

4405MXL 1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts

Contents

Kg 1.20 / 1 / 20

		495517MX	17 mm
		495519MX	19 mm
		495521MX	21 mm




3 PC.

Blow case size (mm) :
206 x 147 x 50 (0.053 cuft)

Insert Adapter


34505102R

KT NO.	mm	mm	L1 mm	L mm	Kg	1 / 20
34505102R	9 x 12	14 x 18	20.5	45.5	82.2	12 / 144



34505201R

KT NO.	mm	mm	L1 mm	L mm	Kg	1 / 20
34505201R	14 x 18	9 x 12	33.5	49.5	131.8	12 / 144




Hook Wrench Head & Set

345042M

- Square drive size: 14 x 18

KT NO.	Size mm	Capacity mm	Maximum Torque N·m	Lw* mm	L mm	Kg	1 / 20
34504236M	36	28-36	354	77	121	248.20	12 / 72
34504245M	45	40-45	377	77	129	274.00	12 / 72
34504255M	55	50-55	398	77	129	263.20	12 / 72
34504262M	62	58-62	421	77	134	278.20	12 / 72
34504275M	75	68-75	444	77	139	294.60	12 / 72
34504290M	90	80-90	465	77	142	288.80	12 / 72

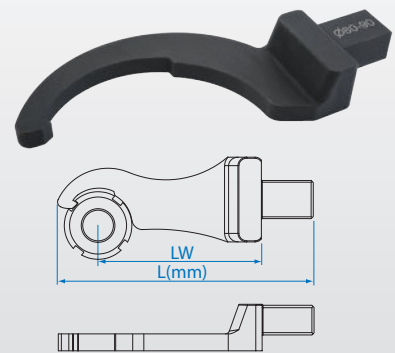

3452407MR

- Suitable for tightening round nuts with radial notches
- Applied with interchangeable torque wrench
- Widely used in automobile, machine tool building and petroleum industries

Contents

Kg 2.48 / 1 / 6

	34505102R	9 x 12(F) → 14 x 18(M)
	345042M	36, 45, 55, 62, 75, 90



7 PC.

