


This is a controlled document.  
 Hardcopy to be endorsed by authorised person.  
 Check with Issuing Officer or SAP system for latest update.

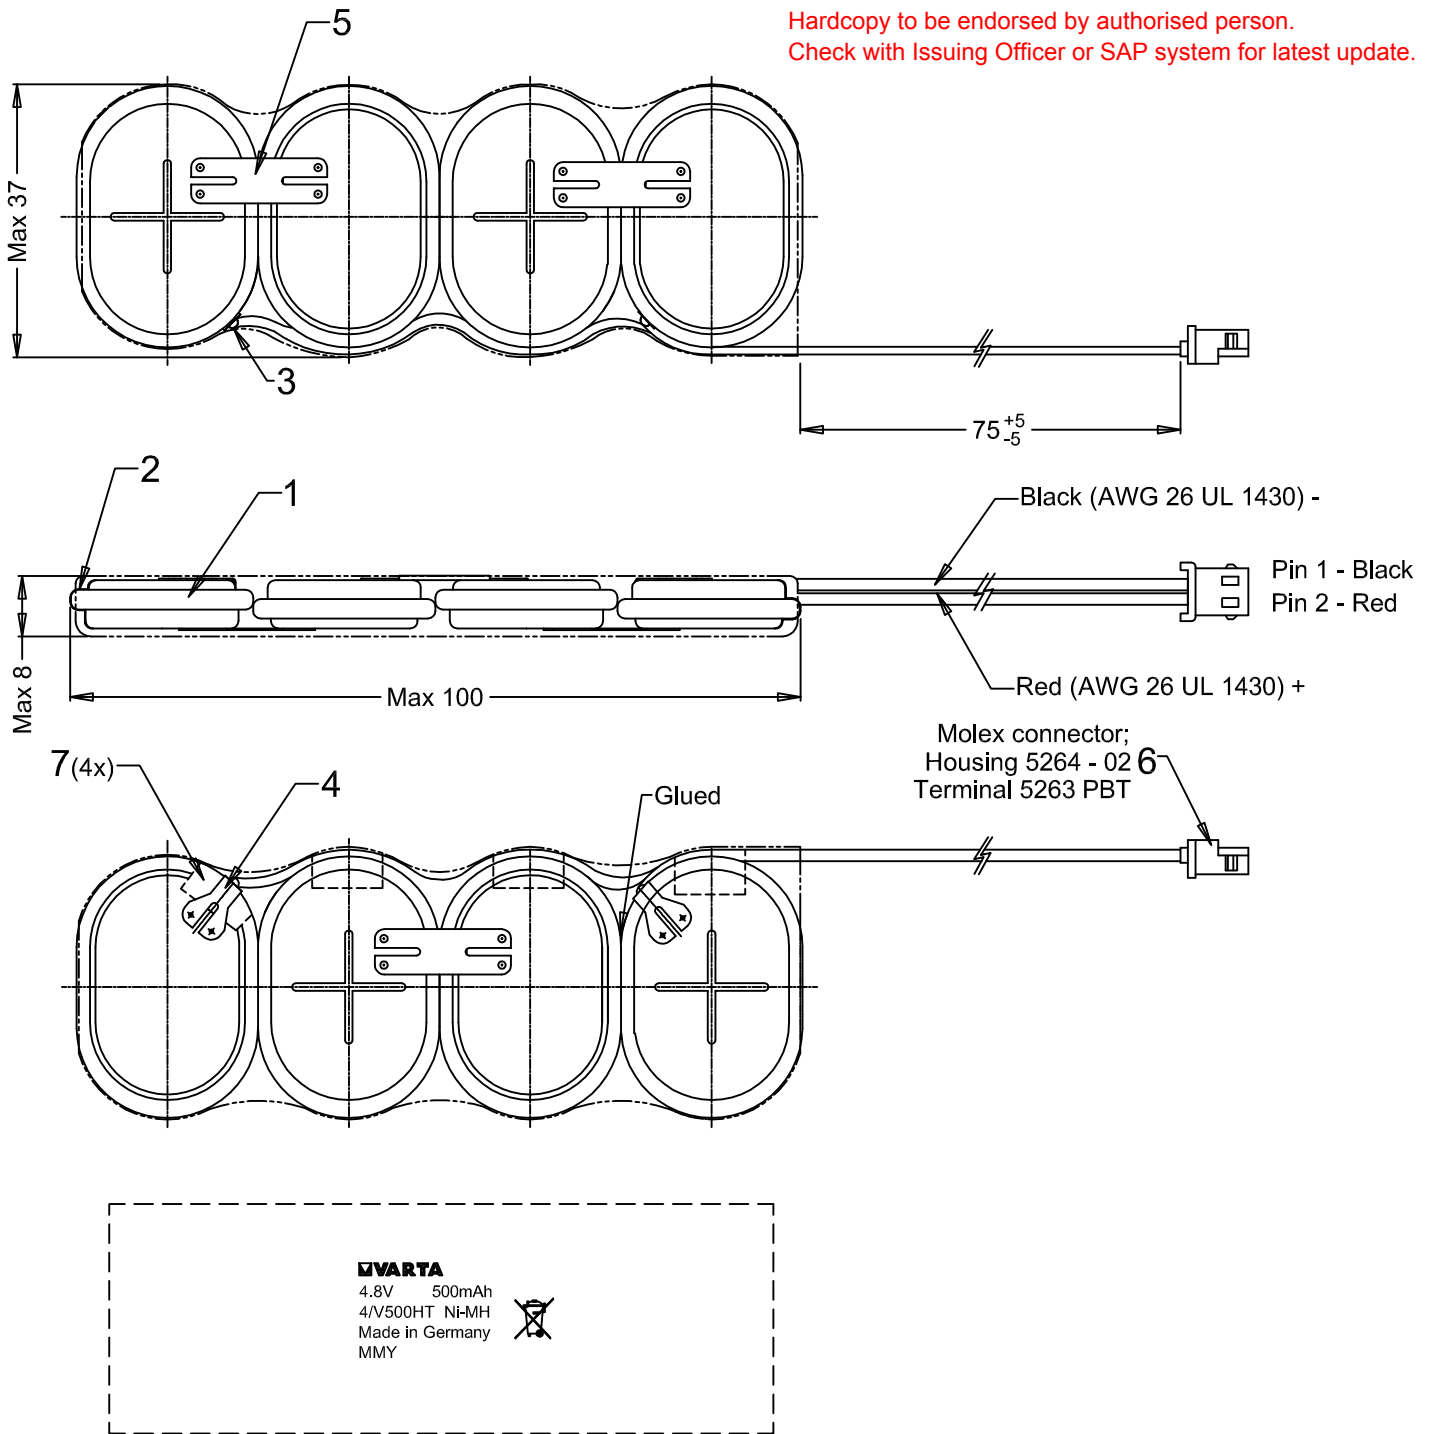

- Note : 1) Battery is totally insulated  
 2) Cell deflection space of 1.2mm/cell is needed in case of abusive conditions.  
 Please consult Varta for more details.  
 3) **Battery with non-standard wire connector polarity.**

Approx. wt: 61g

0	026/09	Refer to provisional drawing p/n P22-00141Rev.001	2009-06-12	Ben	
No	AO No	Revisions	1	Date Name	
Projection:		Material: Refer to part list no : 703575	Description: 4/V500HT L S WC with shrink sleeve & wires connector		
Dimensions in mm		Prepared & Checked	Verified & Approved	Dwg. No: 703575	4 0 0
Tolerance: As specified		2009-06-12	Ben	VKB Order No: 55750 404 014	
Scale: 1 : 1					

Rights reserved to make technical changes, as a result of further development, without notice. This drawing is the property of VARTA Microbattery and must not be copied or disclosed to a third party without the written consent of VARTA Microbattery.

