

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0643212019](#)  
**Status:** **Active**  
**Overview:** CMC and CMX Sealed, Hybrid, Modular Connectors  
**Description:** .635mm, 1.50mm, 2.80mm, CMC Receptacle, 53 Circuits, Right Wire Output, Brown Coding, Mat Sealed

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-64318-002-SP-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Application Specification AS-98420-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification AS-98420-001-CH-001 (PDF)</a>
<a href="#">Product Specification PS-64321-001-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-FR-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-SP-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-CH-001 (PDF)</a>	<a href="#">Packaging Specification PK-98995-001-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-FR-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Application tooling part link**

Application Tooling Part Link	63812-1100
Application Tooling Part Link	63824-1200

**General**

Product Family	Crimp Housings
Series	<a href="#">64321</a>
Application	Automotive, Power, Wire-to-Board
Comments	Current tested on a fully loaded connector, current for temperature increase of 40°C; Current max = 21.0A for 2.80mm Terminal (5.00mm <sup>2</sup> wire), 12.0A for 1.50mm Terminal (2.00mm <sup>2</sup> wire), 2.5A for 0.635mm Terminal (0.75mm <sup>2</sup> wire)


[More Detailed Tech Information](#)

**Overview**

Product Name	CMC and CMX Sealed, Hybrid, Modular Connectors
Taxonomy	CMC
UPC	Connector Housings 883906135324

**Physical**

Circuits (maximum)	53
Circuits Detail	5x 2.8mm, 8 x 1.5mm, 40 x 0.635mm terminals
Color - Resin	Brown
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	Polyester
Net Weight	50.860/g
Number of Rows	5
Packaging Type	Carton
Panel Mount	No
Pitch - Mating Interface	2.54mm, 3.50mm, 7.00mm
Polarized to Mating Part	Yes

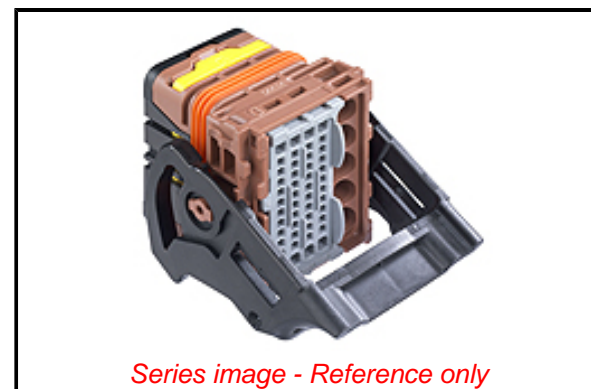

Series image - Reference only

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Compliant

Not Contained

**Search Parts in this Series**

[64321 Series](#)

**Mates With**

154-Circuit CMC Header [347630001](#)

**Use With**

CMC CP Female Terminal [64322](#)  
(0.635mm), [64323](#) (1.50mm) . CMC Wire  
Cap [643211101](#) . Sealing Plugs [643251010](#)  
, [643251023](#) , [643251091](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Continuity Test Pen Assembly	<a href="#">638121100</a>
Unlocking Tool for CMC and	<a href="#">638241200</a>

Stackable  
Temperature Range - Operating

No  
-40° to +125°C

CMX Receptacle  
Connector

**Electrical**

Current - Maximum per Contact

12.0A, 2.5A, 21.0A

**Solder Process Data**

Lead-free Process Capability

N/A

**Material Info**

**Reference - Drawing Numbers**

Application Specification

AS-64318-002-001, AS-64318-002-CH-001,  
AS-64318-002-FR-001, AS-64318-002-SP-001,  
AS-98420-001-001, AS-98420-001-CH-001,  
AS-98420-001-FR-001, AS-98420-001-SP-001

Packaging Specification

PK-98995-001-001

Product Specification

PS-64321-001-001

Sales Drawing

SD-64321-001-001

This document was generated on 10/20/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**