

## M8 FEMALE 0° SHIELDED WIREABLE SCREW TERM.

3-pol. 0,14...0.5mm<sup>2</sup>

Female straight


3-pole, shielded

Screw terminals


Connection cross section: 0.14...0.5 mm<sup>2</sup>

### [Link to Product](#)

#### Illustration

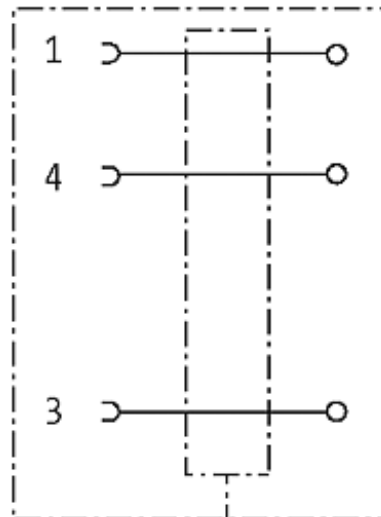

# Female

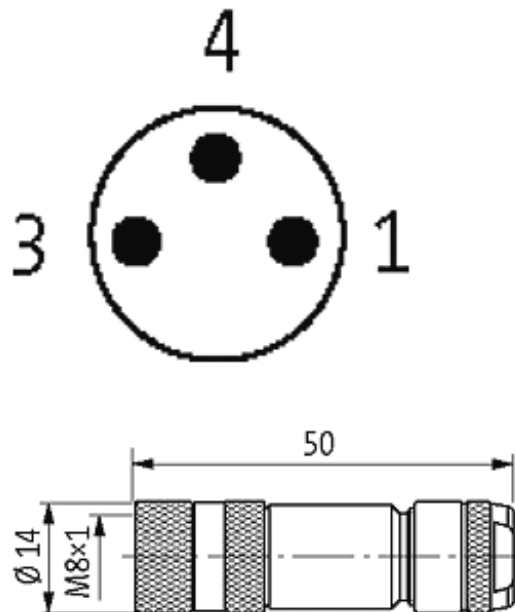

Product may differ from Image

## Approvals



## Form

08661

## Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.14...0.5 mm <sup>2</sup>
Sealing range (cable diameter)	3.5...5.5 mm
Protection	IP67 inserted and tightened (EN 60529)

## General data

Temperature range	-25...+85 °C
Dimensions H × W × D	49×14×14 mm

## Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1