


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0903253006](#)  
**Status:** **Active**  
**Overview:** [Picoflex Ribbon-Cable Connectors](#)  
**Description:** Picoflex PF-50 Header, Vertical, Low Profile, with PCB Pegs, 6 Circuits, Selective Gold (Au) Plating

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification 908140000-AS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Packaging Specification PK-90325-002-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-99020-0011-001 (PDF)</a>	

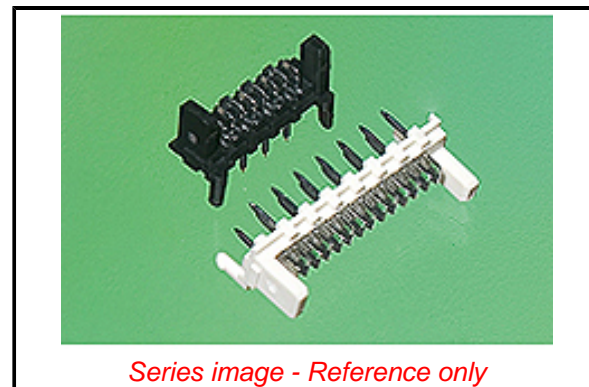

Series image - Reference only

**Agency Certification**

CSA	LR19980
UL	E29179

**General**

Product Family	PCB Headers
Series	<a href="#">90325</a>
Application	Signal, Wire-to-Board
Comments	Low Profile
Component Type	PCB Header
Overview	<a href="#">Picoflex Ribbon-Cable Connectors</a>
Product Name	Picoflex
Taxonomy	PCB Headers and Receptacles
UPC	800753676848

**Physical**

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Resin	Polyester
Net Weight	0.310/g
Number of Rows	1
Orientation	Vertical
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[90325](#) Series

**Mates With**

[90327](#) IDT Connector

**Electrical**

Current - Maximum per Contact  
Voltage - Maximum

1.2A  
250V

**Solder Process Data**

Lead-free Process Capability

WAVE

**Material Info****Reference - Drawing Numbers**

Application Specification  
Packaging Specification  
Product Specification  
Sales Drawing

908140000-AS-000  
PK-90325-002-001  
PS-99020-0011-001  
SDA-90325-001

This document was generated on 01/05/2023

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**