




DIN 7979 D

~ISO 8735 A

60 HRC

Standard withdrawn

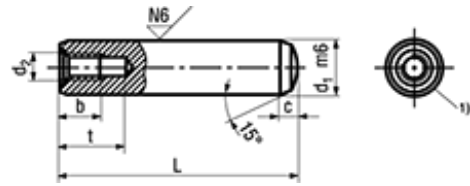

1) Slight flat or small groove at manufacturer's option

BN 1970

Parallel pins with internal thread

hardened, ground

Steel hardened 60 HRC

plain

- ~UNI 6364 B
- ~CSN 022151
- Tolerance: m6

Article#	d ₁	c~	d ₂	b	t min.	L
1431056	6	2,1	M4	6	10	16
1431064						20
1431072						24
1431080						28
1431099						32
1431102						40
1431110						50
1431129						60
1431137	8	2,6	M5	8	12	20
1431145						24
1431153						28
1431161						32
5507476						36
1431188						40
1431196						50
1431218						60
1431226						70
1431234	10	3	M6	10	16	24
1431242						28
1431250						32
1431269						40
5509357						45
1431277						50
1431285						60

Article#	d ₁	c~	d ₂	b	t min.	L
1431293	10	3	M6	10	16	70
1431307						80
1431315	12	3,8	M6		16	28
1431323						32
1431331						40
1431358						50
1431366						60
1431374						70
1431382						80
5517718						90
1431390						100
5506991						120
5518141	14	4	M8		20	50
1431404	16	4,7	M8	12	20	40
5506997						45
5507474						50
1431412						60
5513131						70
1431420						80
1431439						100
1431447						120
5507477	20	6	M10		25	50
1431455						60
5507002						70
1431463						80
1431471						100
1431552						120