



SYM	DESCRIPTION	APPROVED	DATE
1			
2			
3			
4			

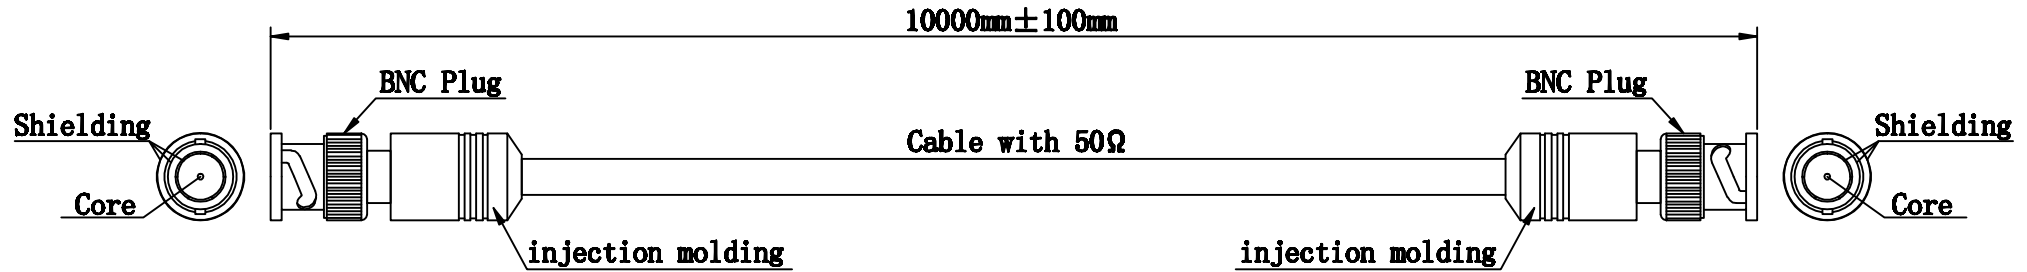

BNC connector cable (RG58), shielded

Connectors: 2x BNC male
Contacts: nickel-plated (gold-plated pins)
Conductor area: 0.636 mm²
AWG: 20
Composition of conductor: 1 x 0.90 mm
Conductor material: CCS
Insulation material: PE
Jacket material: PVC
Conductor resistance: 500 ± 10 Ω/km
Shielding: 35 % coverage
Capacitance: 54 ± 5 pF/m
Cable OD: 5.0 ± 0.2 mm
Weight: 30 ± 2 g/m

SYM	Name	Description	Remarks	Tolerance (mm)			
				Wire harness size L(mm)	Trunk	Protection tube	Positioning space
13							
12							
11				L ≤ 200	+20 -10		±5
10				200 < L ≤ 500	+25 -10		±5
9				500 < L ≤ 1000	+40 -20		±10
8				1000 < L ≤ 2000	+60 -20		±20
7				2000 < L ≤ 3000	+80 -30		±30
6				3000 < L ≤ 5000	+80 -30		±30
5				L > 5000	+100 -50		±40
4							
3							
2							
1							



APPROVED	Shen Juan	
CHECKED	Li Jie	
DRAWN	Zhang Yining	Customer : _____ Date : 2023-10-19
UNIT	mm	DRAWING NO. BNC-050-10.0
REV	1	CUSTOMER NO. _____

SIZE: A4
 PAGE: 1/1