




DIN 6798 J

Standard withdrawn

350-425 HV

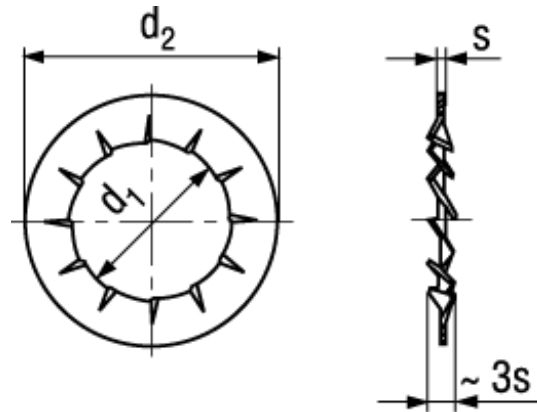

## BN 782

### Serrated lock washers

type J, internal serrations

Spring steel 350-425 HV


zinc plated blue

- ~UNI 8842 J
- ~CSN 021746



ISO 4042

Fasteners hardness  $\geq 320$  HV with electroplated coatings:  
Susceptible to hydrogen embrittlement!  
Further notice to residual risks can be found in the  
introduction section.

Article#	Customer Article#		d <sub>1</sub> min.	d <sub>2</sub> max.	s
1278185	B2/BN782	M2	2,2	4,5	0,3
1437208		M2,3	2,5	5	0,4
1228900	B2.5/BN782	M2,5	2,7	5,5	0,4
1278223	B3/BN782	M3	3,2	6	0,4
1278231	B3.5/BN782	M3,5	3,7	7	0,5
1278258	B4/BN782	M4	4,3	8	0,5
1278266		M5a	5,1	9	0,5
1963619	B5/BN782	M5	5,3	10	0,6
1278274	B6/BN782	M6	6,4	11	0,7
1278282		M7	7,4	12,5	0,8
1278290		M8a	8,2	14	0,8
1963627		M8	8,4	15	0,8
1278304		M10	10,5	18	0,9
1278312		M12	13	20,5	1
1278320		M14	15	24	1
1278339		M16	17	26	1,2
1437224		M18	19	30	1,4
1278347		M20	21	33	1,4
1437232		M22	23	36	1,5
1278355		M24	25	38	1,5
1437240		M27	28	44	1,6
1437259		M30	31	48	1,6