


CD45-E2GA332M-NKA



Applications	Commercial Grade
Feature	Safety Standard Approved
	Halogen-free
Series	CD45
Status	Production
Brand	TDK



Size	
Diameter(D)	(11.00mm Max.)
Thickness(T)	6.00mm Max.
Lead Gap(F)	10.00mm +2.00,-1.00mm
Lead Diameter(d)	0.60mm ±0.05mm

Electrical Characteristics	
Capacitance	3.3nF ±20%
Rated Voltage	X1/440VAC, Y1/400VAC
Withstanding Voltage	4kVAC
Temperature Characteristic	E(+20,-55%)
Dissipation Factor (Max.)	2.5%
Insulation Resistance (Min.)	10000MΩ




Other	
Soldering Method	Wave (Flow)
	Iron Soldering
Lead Length / Package Type	5mm for Bulk
AEC-Q200	NO
Package Quantity	1000pcs

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

CD45-E2GA332M-NKA



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

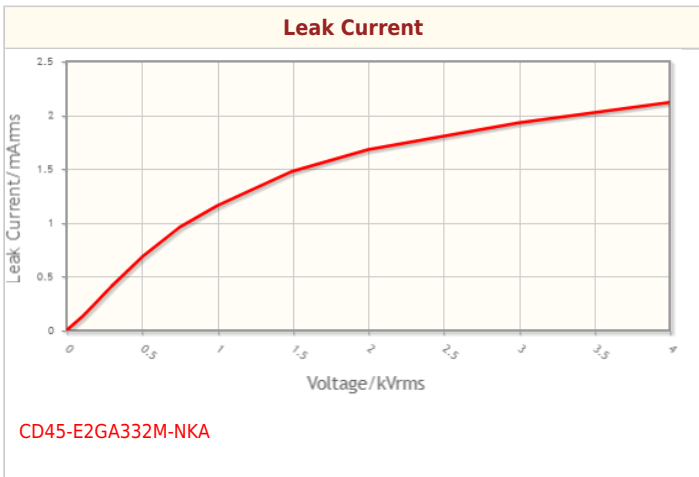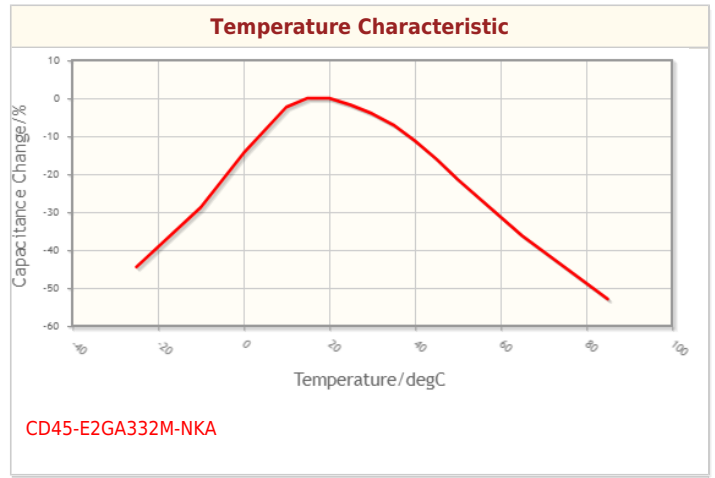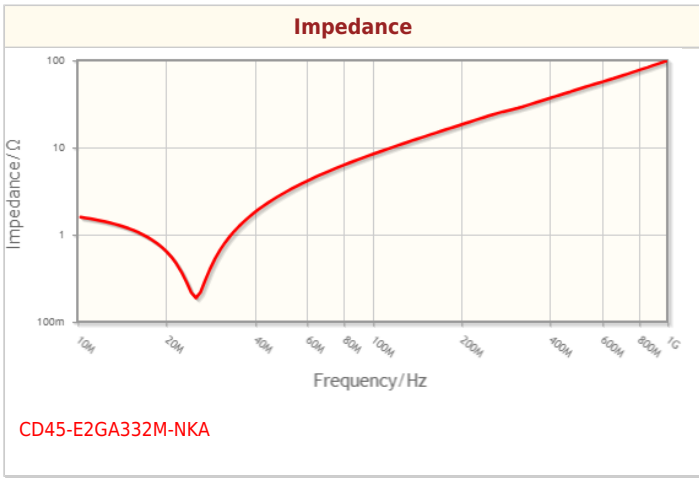

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.