


lettering: NO


REV	Change record	Change the date
A/0	Initial issue	2016-01-15

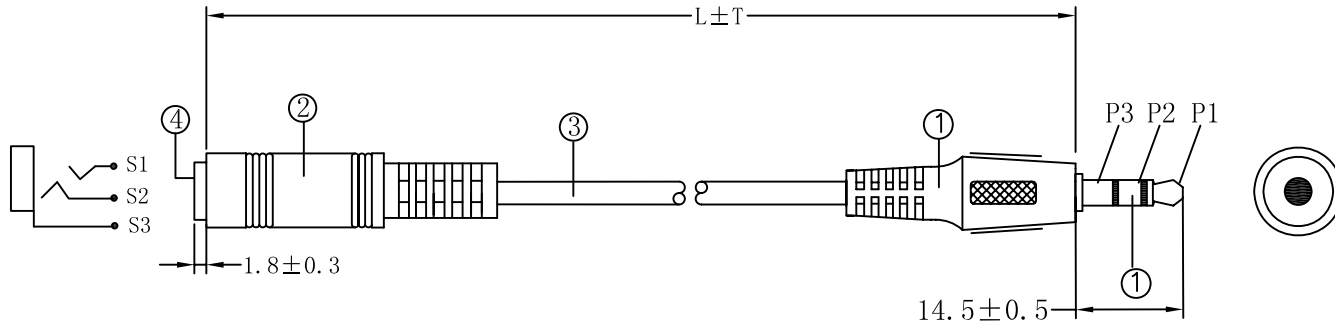

接点图:

<u>A</u>		<u>B</u>
1	---	WHITE --- 1
2	---	RED --- 2
3	---	TWINE --- 3

<u>A</u>	<u>B</u>	
NO.	cable length (L)	cable tolerance (T)
1	1500MM	15MM
2	1800MM	20MM
3	2000MM	20MM
4	3000MM	30MM
5	5000MM	50MM
6		
7		

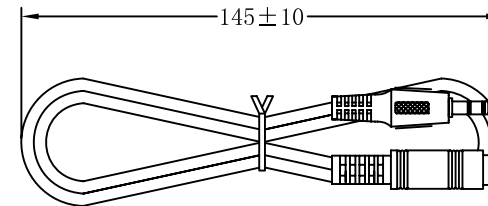

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN);
3. Conduction Resistance: 5ohm (MAX) at 300V DC/0.01S .

**VCOM** VCOM INTERNATIONAL LTD.

④	3.5STF, Surface of nickel plating, welded		PCS	1	S-D41A
③	CABLE:3C ,OD:3.5mm JACKET PVC, BLACK	VC-350-0002	M	1.5-5	
②	OVER MOLDING:45P PVC BLACK	520-6107	g	12	
①	3.5STM, Surface of nickel plating,Vinyl three, welded		PCS	1	S-Y41
NO.	The material content	Stock NO.	unit	quantity	Mould NO.

TITLE	3.5STM/F	CUSTOMER	EOI	CUSTOMER	mm	PAGE: 1 of 1
PART NO.	SAM-F05-0002	CUSTOMER NO.			SCALE	
PRODUCT NO.		REV	A/0		DATE	2015-09-18
DRAWN BY:		CHECKED BY:		APPROVED BY:	ChenTao	