

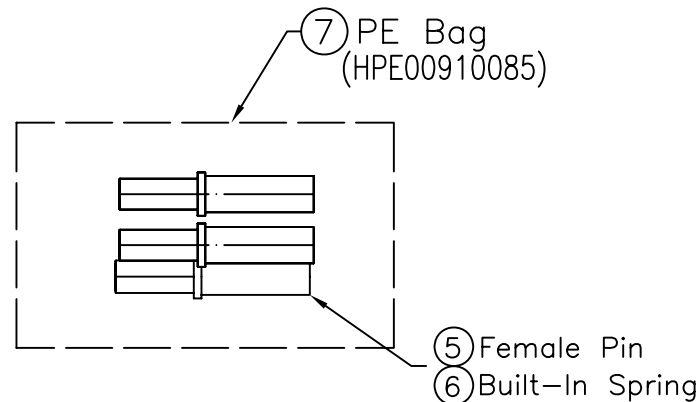
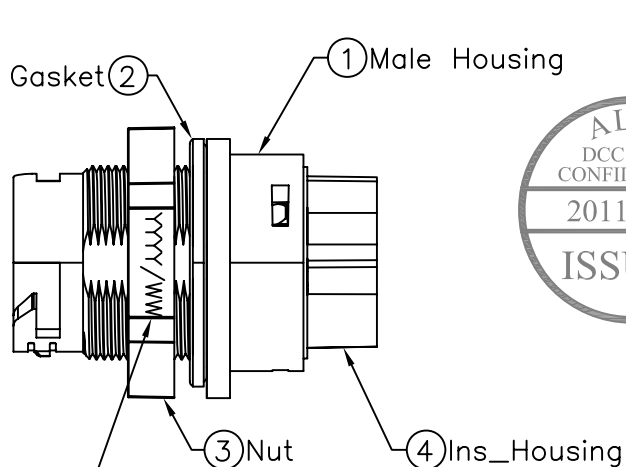





Note:



- * @@Important Dimensions To Check.(重點檢查尺寸)
- * Voltage (電壓) : AC 660V ; DC 1000V
- * Current (電流) : 25A
- * Please refer to manual for Ass'y instruction (使用方式請參閱組裝說明書)
- * Standard (認證) :ULXXXXX ;CSAXXXX; TUVXXXXX
- * Waterproof Rate (防水等級) : IP68_3M6H(Mating 對接)
- * Male Housing (母膠芯): m-PPE(F1),Black (黑)
- * Female Pin (母端子): Copper (銅),Tin Plated (鍍錫)
- * Gasket (墊片) : Silicone (矽樹脂),Gray (灰)
- * Wire Size (導體尺寸): 12AWG
- * Flame Class (防火等級): UL94V-0
- * Recommended Panel Thickness: 0.5mm~8mm (建議面板厚度)
- * One Set Ass'y Instructions in one PE Bag. (每包袋子中含有組裝說明書)

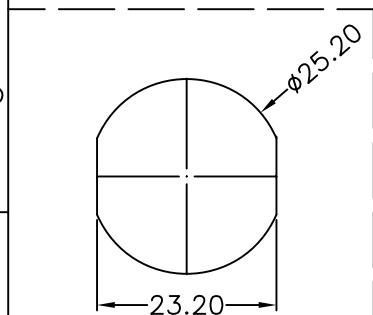

Recommended Panel Cut-Out

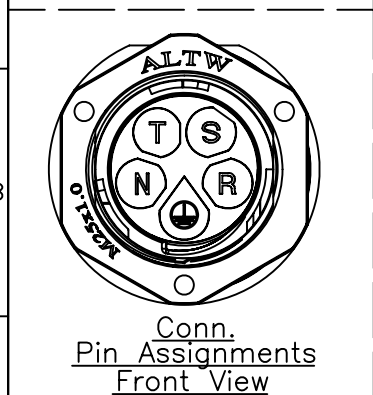

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

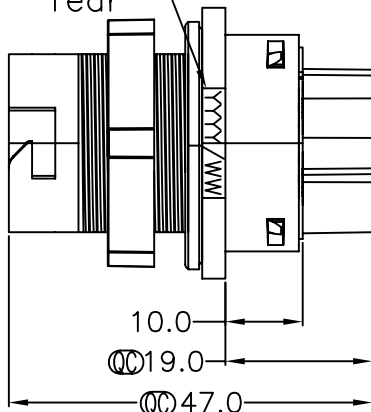

TITLE PV Power Conn 5Pin Panel Male Connector Female Pin			
SCALE	Free	SHEET	1 OF 1
REV.	A	SIZE	A4
QC :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO LTWPWH-05PMFC-LC8001	DRAWN BY Micky	DATE 2011/06/13
DWG NO LTWPWH-05PMFC-LC8001	CHECKED BY Kevin	DATE 2011/06/13
CUSTOMER	APPROVED BY Victor	DATE 2011/06/13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.