


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 06/03/11'	~	

N=No. of contacts/2

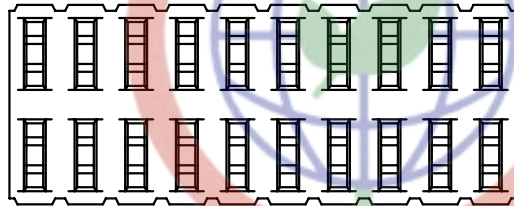

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C

2. MATERIALS



- . Contact Material: Copper alloy
- . Insulator: thermoplastic(UL94V-0)

3. PART NUMBER: DS1065-08

4. PRODUCT NUMBER CODE:

DS1065-08 - X X X X X

- MOUNTING TYPE
V: VERTICAL TYPE
- HOUSING COLOR
B: BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S: SOCKET
- No. OF CONTACTS
2*1-2*40

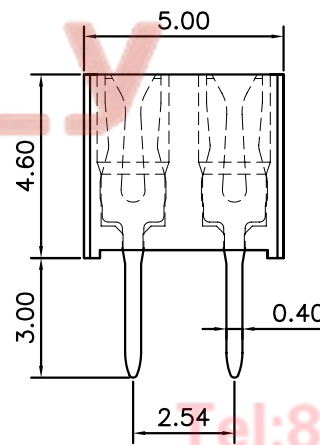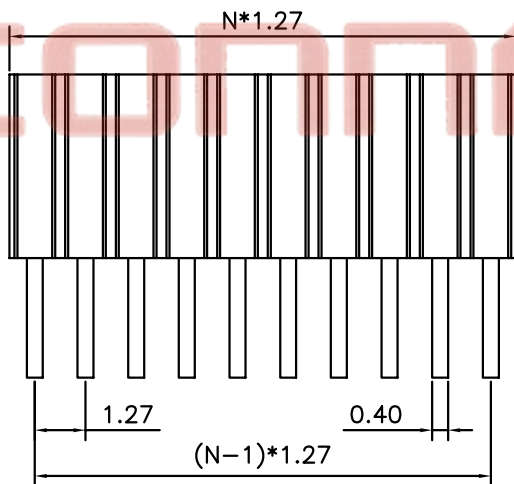

TEL: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhenqin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 1.27mm TYPE
X.	±0.60	X.	±5°	UNITS	mm		DUAL ROW STRAIGHT
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-08
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1065-08-XXXXX					