


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/02/23'		

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are strictly prohibited without prior written consent from CONNPLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

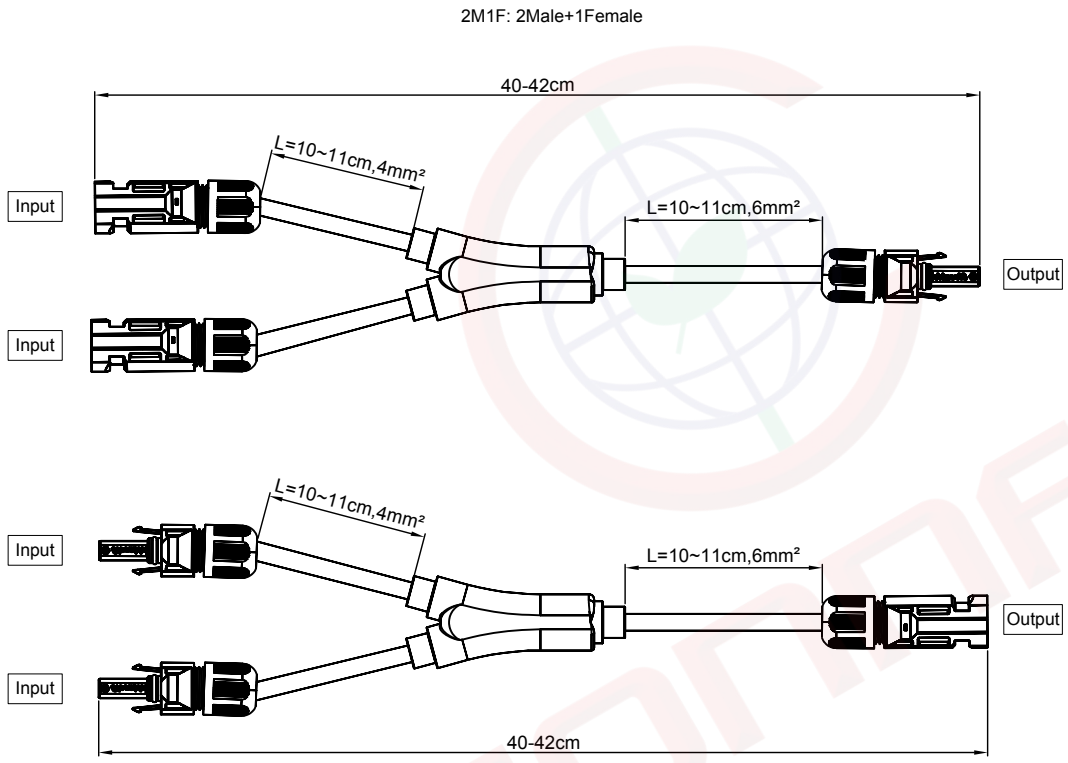

Notes:  
 Specifications:  
 1. Contact Resistance: 3mΩ Max.  
 2. Insulation Resistance: 500MΩ Min.  
 3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.  
 4. Current Rating:50A.  
 5. Voltage Rating:1000V AC rms.  
 6. Temperature: -40°C~+85°C.  
 Materials:  
 1. Insulating material:PPO.  
 2. Contact material: Copper Alloy.  
 Product Number Code:  
 DS1162-16 - X X X X

Cable color  
 B: Black  
 R: Red  
 Contact plating  
 6: Tin  
 Housing color  
 B: Black  
 No. of contacts  
 2F1M: 2Female+1Male  
 2M1F: 2Male+1Female



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1162-16-XXXXX-A		

PROJECTION		TITLE	
UNITS	mm	PV Cable Assemblies Y Type Extension Cable	
SHEET SIZE	A4	SERIES	DS1162-16 SERIES

晨翔电子有限公司  
 CONNPLY CONNPLY ELECTRONIC CO. LTD