


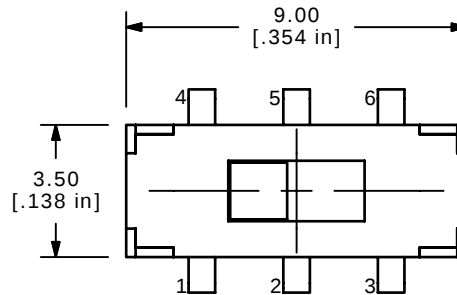
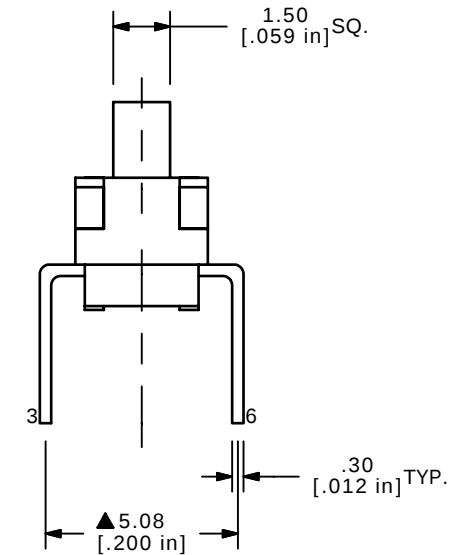
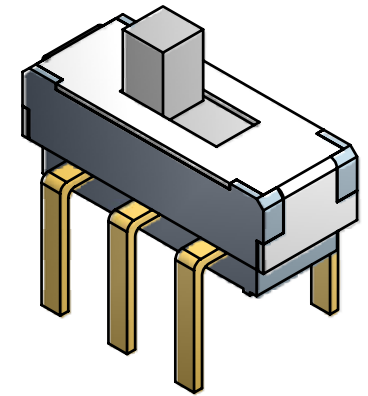
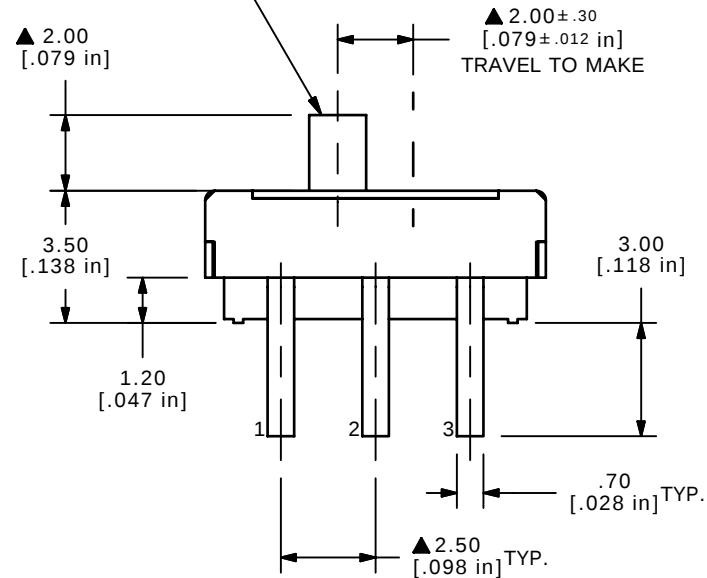
P.C. MOUNTING



▲ CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE:
X.X = ± 0.4 X.XX = ± 0.25
3. ▲ DENOTES CRITICAL PARAMETER
4. TERM NOS. FOR REF ONLY
- ▲ 5 RATING: 6VDC .3A
6. OPERATING FORCE: 200 $\pm$ 150 GRAMS
7. LIFE CYCLES: 10,000 CYCLES
8. CONTACT RESISTANCE (INITIAL): 70m ohm MAX.
9. 2002/95/EC (ROHS) COMPLIANT
10. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
- ▲ 11. CONTACT PLATING: GOLD 4 MILLIONTHS MIN. OVER NICKEL

▲
ACTUATOR COLOR:
WHITE

TITLE EG 2271, SPECIAL LEAD SPACING

A	17776	NEW RELEASE	10/12/07	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 5:1

DATE 10/12/2007

DR BLR

DWG P122712

REV A