


MECHANICAL DETAILS

Shell Style Model	ERN* : Fixed receptacle nut fixing with earthing tags
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	0 - 0 mm


Variant 2 :

	A	L	Weight
Mm.	8	15	2.8
In.	0.31	0.59	0.11




PERFORMANCE DETAIL

Insert	0.25 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Specifications	
Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	5000
Contact Dia.:	0.7 mm (0.028in)
Bucket Dia.:	0.6 mm (0.024in)
R (max):	6.1 mOhm



OTHER CHARACTERISTICS

Endurance (Shell)	Endurance (Shell):
F ret (min):	100 N
IP Rating	50

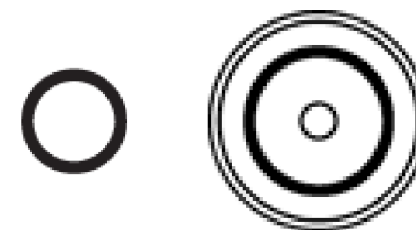

Available Download



00and01Coaxial_en.pdf

Related links

-  [Contact](#)
-  [Quote Request](#)
-  [Catalogs Downloads](#)
-  [Catalogs Requests](#)
-  [Sample Request](#)
-  [3D drawings](#)