

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	1B
Termination type	No contacts / Accessory
IP rating	0
Cable Ø	3.50 - 3.90 mm
Matching parts	
Status	active
Alternative part	



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	GMA*: Bend relief Grey
Keying	No keying
Housing Material	Thermoplastic polyurethane elastomer(Desmopan 786)
Cable Fixing	∅ 3.5 - 3.9 mm
Variant	V : Grey

### Performance

Configuration	
Insulator	G: PEEK/Pehd
Rated Current	

### Others


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Temp (min / max): -40°C / +80°C  
IP Rating: 0

---

## DRAWINGS

### Draws

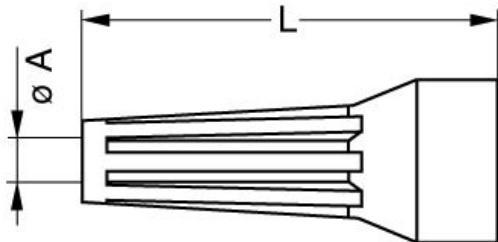

### Dimensions

	A	L
mm.	3.5	30
in.	0,14	1,18

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*