

Test plug PS-HDMI-019

Item 34814



ingun[®]
Partner for Future Technology

- Precise, low-wear contacting of HDMI plug connectors
- Outstanding service life, up to 50,000 cycles under optimal conditions.
- Reliable data transmission
- Installation via floating mount
- Signal transmission via original connector plug or solder connection
- Optional spring elements (112863: set of 2) can compensate for tolerances of ± 0.4 mm and positioning inaccuracies.

General data


Product group	PS test plug
Series	PS
Sub-series	PS-HDMI
DUT / contact	HDMI
DUT interface gender	F signal conductor female / socket
Width	30 mm [1.18 in]
Min. temperature	- 80 °C [- 176 °F]
Max. temperature	+ 150 °C [+ 302 °F]
RoHS-compliant	RoHS-3

Inner conductor data

Inner conductor tip style material	3 CuBe
Inner conductor max. current load capacity	1 A
Number of inner conductor poles	19

Mechanical data


Total length	30 mm [1.18 in]
Installation height without receptacle	30 mm [1.18 in]

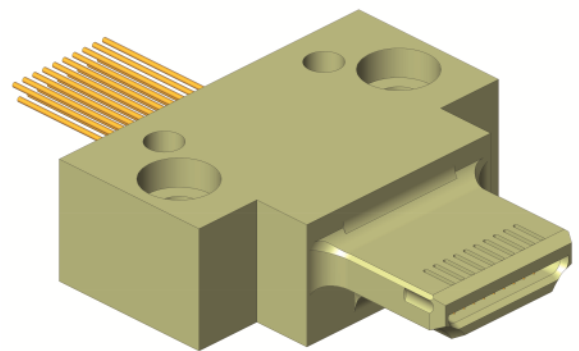

Test plug
PS-HDMI-019
Item 34814



ingun[®]
Partner for Future Technology

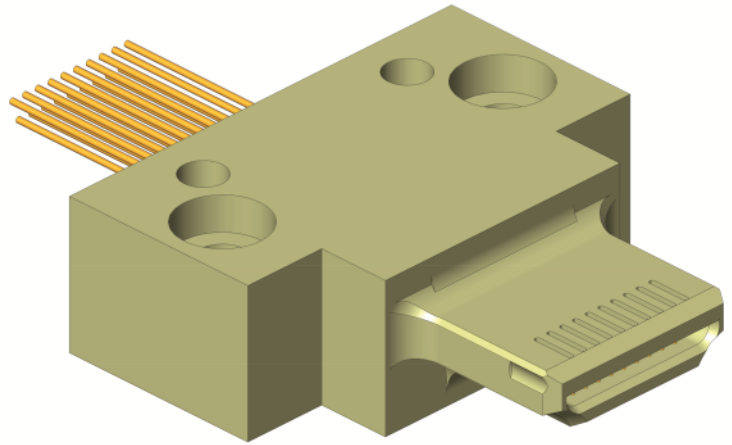

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/23 EN

Learn more about
Test probes

