




Rating	15A Max. 12V DC	Mounting Hole 	Circuit Diagram 
Contact Resistance	50M ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Operation Temperature	-25°C~+85°C		
Switch Function	3P OFF-ON	Thickness:5.5mm max.	

Materials:  
 Frame: PBT, Black (UL flame: 94V-0)  
 Bottom: PBT, Black (UL flame: 94V-0)  
 Terminals: Copper Alloy  
 Contacts: Copper Alloy+AgSnO2InO3

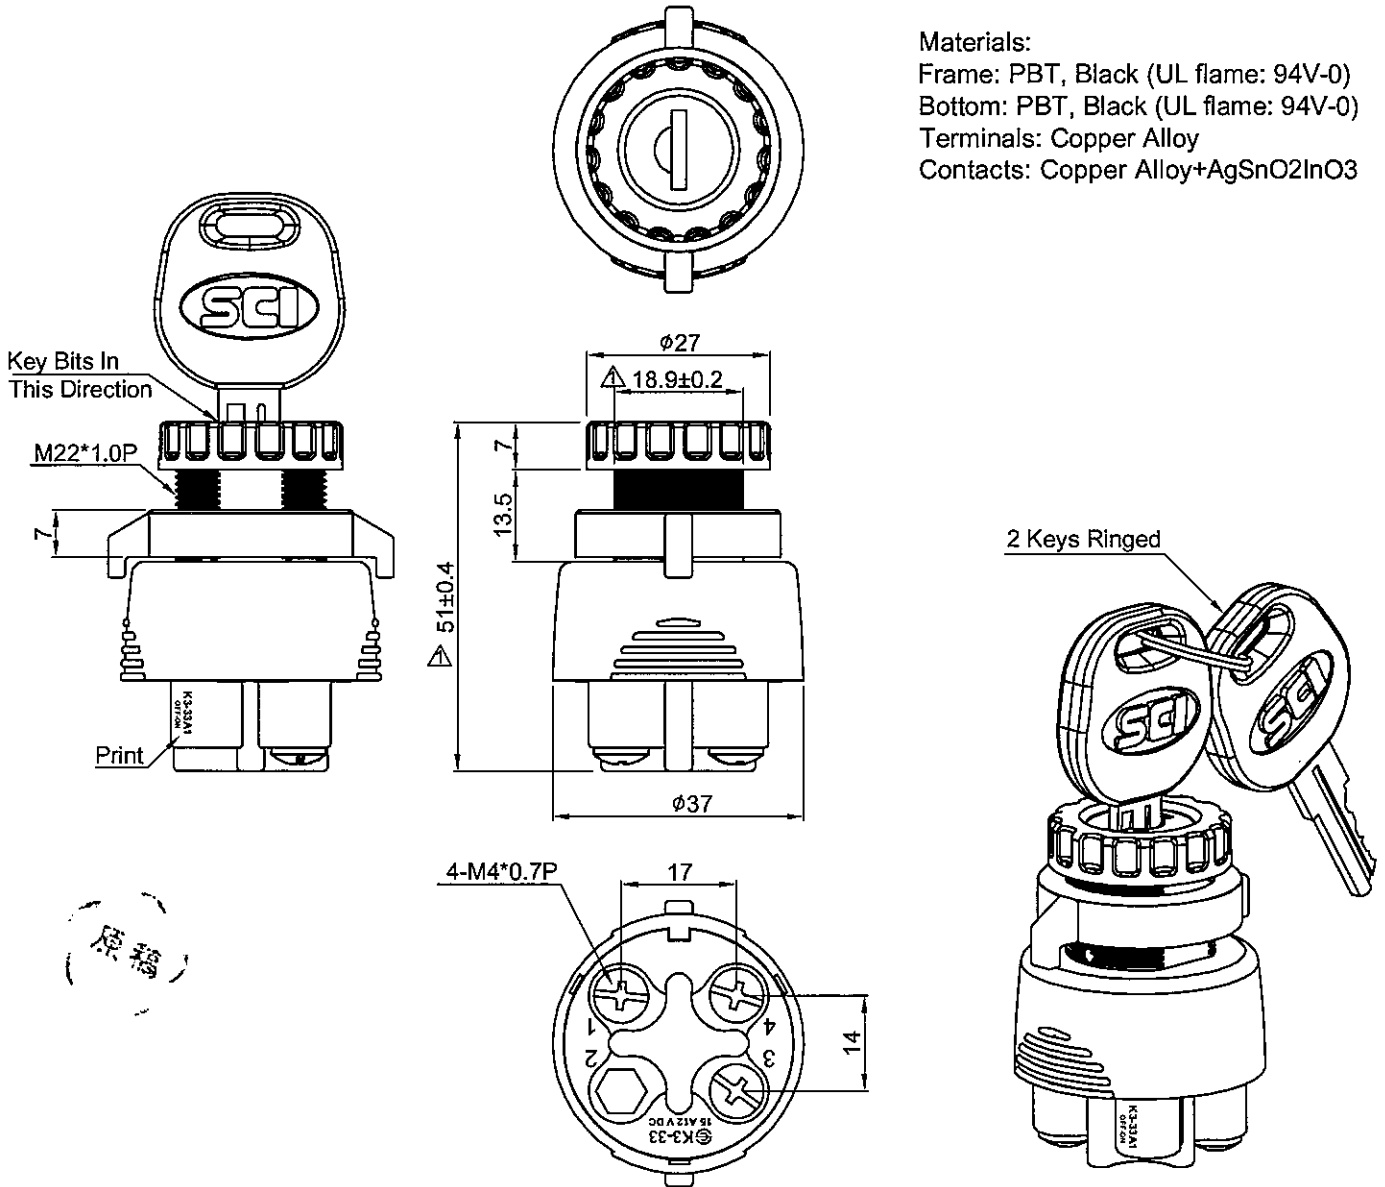

Tolerances Unless Otherwise Specified  $\pm 0.3$

9/9/11	詹家榮	配合實物修改尺寸公差原51.4->改為51±0.4; 19->18.9±0.2				△
Date	Name	Description				NO
Drawn	Checked	Approved	SCI BOM No.	Model Name	KEY SWITCH	
Jam Chan			Customer No.	Model No.	K3-33A1-07	REV.
9/9/11		9/9/11	Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.	1