




This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

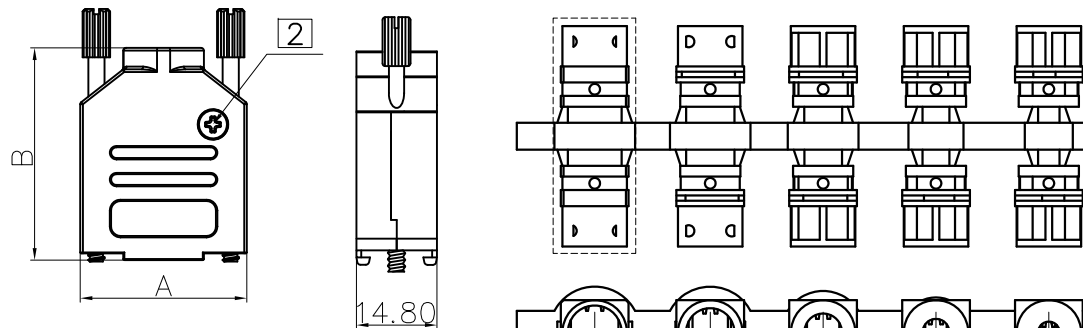

L17D TZK 09K XX T




L17D TZK 09K XX T



Thumb screw

Screw thread



Screw



Customer Drawing

Part Number	A	B	Part Number
L17D TZK 09K FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K T
L17D TZK 25K FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K T
L17D TZK 37K FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K T

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
2	HK#	From self-tapering to self-tapping	May/05/11	IP
3	HK#	Correct View shape	03/27/13	IP
4	HK#	Correct The Notes	04/19/16	IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel, blue zinc plating, pozi drv head

Cable strain relief: Plastic, UL94 V-0, Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K XX T

RoHS Compliance

Series 17DTZK:180°

Position: 9,15,25,37

Bulk Package

T: with threaded backshell, not self-tapping type

FM: Full steel metal screwlock
Blank: plastic knob on screwlock

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	FILED	
.X +/-	0.50	Falta Liu		04/19/16
.XX +/-	0.30	CHECKED Tony Tang		04/19/16
.XXX +/-	0.20	CHECKED		
FRACTIONS +/-	2'			
ANGLES +/-				
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol

TITLE

Metal Hood, DTZK series

SIZE

DRAWING NO.

L17DTZKXXKXXT

REV.

4

SCALE

NONE

SHEET 1 OF 4

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
SEE SHEET 1 OF 4				

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel,blue zinc plating, pozi drv head

Cable strain relief: Plastic,UL94 V-0,Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K XX T

RoHS Compliance

Series 17DTZK:180°

Position:9,15,25,37

Bulk Package

T: with threaded backshell, not self-tapping type

FM: Full steel metal screwlock
Blank: plastic knob on screwlock


UNLESS OTHERWISE SPECIFIED TOLERANCES	APPROVAL		DATE
	DRAWN	DATE	
U.S.	Falta Liu	04/19/16	
METRIC	CHECKED Tony Tang	04/19/16	
.X +/-			
.XX +/-			
.XXX +/-			
FRACTIONS +/-			
ANGLES +/-			
FOR MATERIALS AND FINISHES SEE NOTES	DRAWING FILE :		
REMOVE SHARP EDGES	ANGLE OF PROJECTION		
DIMENSIONS	U.S. INCHES		
U.S.	METRIC		
METRIC	MM		

Amphenol			
TITLE			
Metal Hood, DTZK series			
SIZE	DRAWING NO.	REV.	
A4	L17DTZKXXXXXT	4	
SCALE	NONE	SHEET 2 OF 4	


Customer Drawing

Part Number	A	B	Part Number
L17D TZK 09K FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K T
L17D TZK 25K FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K T
L17D TZK 37K FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K T


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

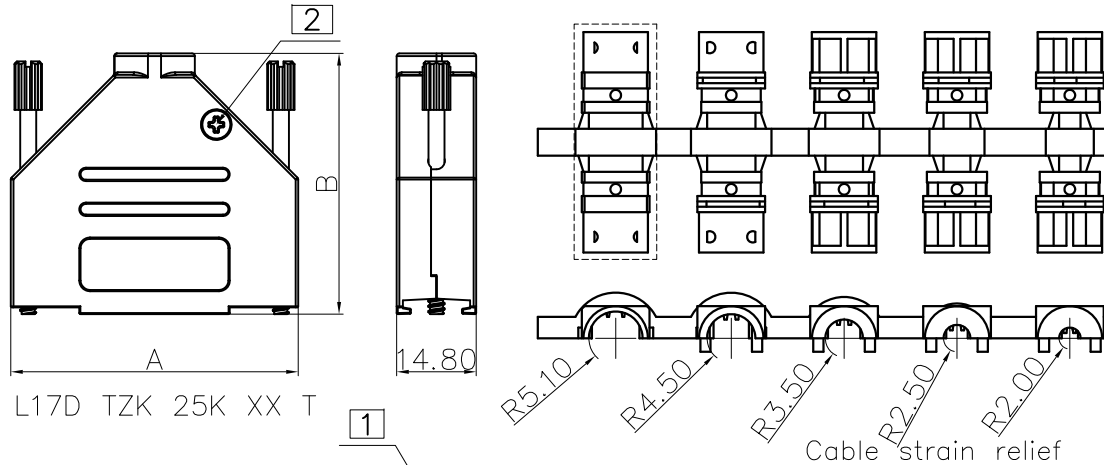


L17D TZK 25K XX T

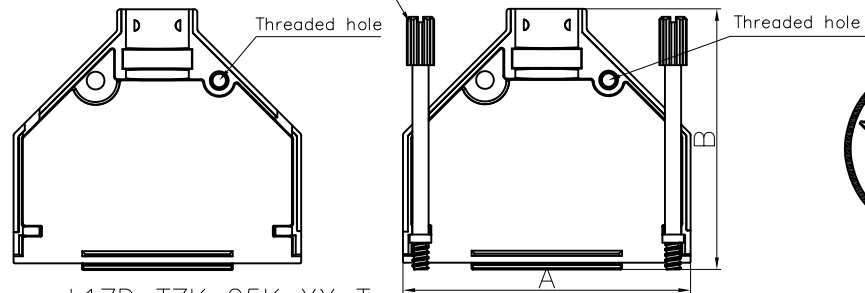

L17D TZK 25K XX T



Thumb screw



Screw

Customer Drawing

Part Number	A	B	Part Number
L17D TZK 09K FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K T
L17D TZK 25K FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K T
L17D TZK 37K FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K T

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1 OF 4		

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel, blue zinc plating, pozi drv head

Cable strain relief: Plastic, UL94 V-0, Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K XX T

RoHS Compliance


Series 17DTZK:180°

Position: 9,15,25,37

Bulk Package

T: with threaded backshell, not self-tapping type

FM: Full steel metal screwlock
Blank: plastic knob on screwlock

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE	
U.S.		METRIC			
.X +/-	/	0.50		DRAWN <u>Pai-sh. Liu</u> 04/19/16	
.XX +/-		0.30		CHECKED <u>Tony Tang</u> 04/19/16	
.XXX +/-		0.20		CHECKED	
FRACTIONS +/-					
ANGLES +/-		2'			
FOR MATERIALS AND FINISHES SEE NOTES					
REMOVE SHARP EDGES					
DIMENSIONS					
U.S.		INCHES			
METRIC		MM			
ANGLE OF PROJECTION					
					

Amphenol

TITLE

Metal Hood, DTZK series

SIZE

DRAWING NO.

L17DTZKXXKXXT

REV.


4

SCALE

NONE

SHEET 3 OF 4

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

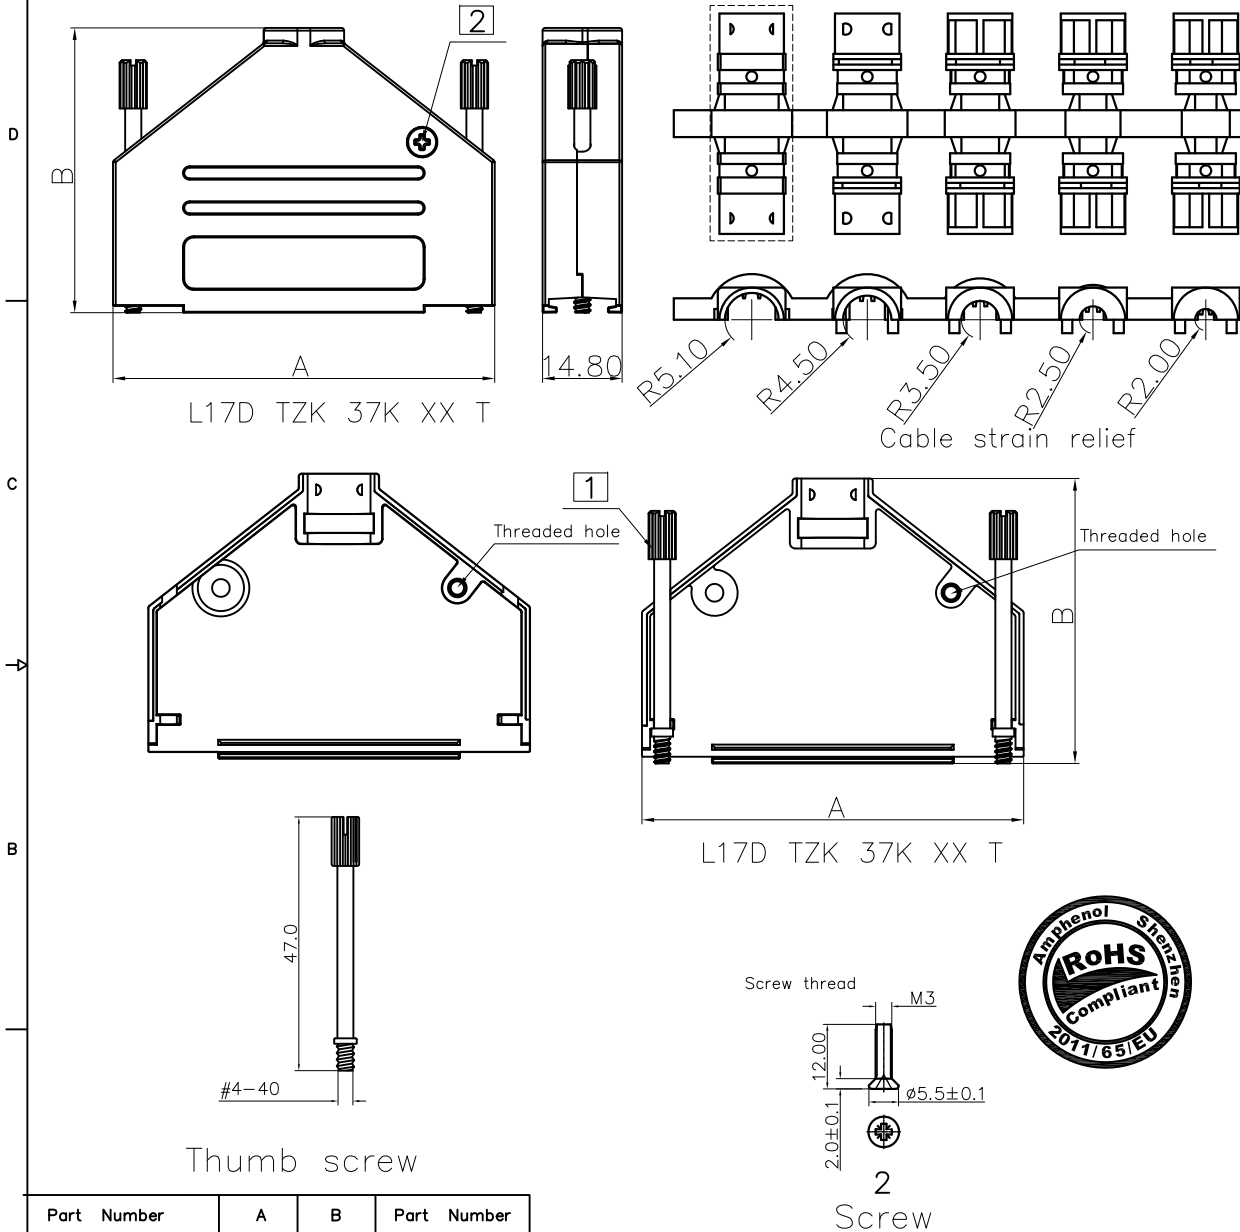

Part Number	A	B	Part Number
L17D TZK 09K FM T	31.0 (1.220")	39.5 (1.555")	L17D TZK 09K T
L17D TZK 15K FM T	39.5 (1.555")	41.5 (1.634")	L17D TZK 15K T
L17D TZK 25K FM T	53.5 (2.106")	48.5 (1.909")	L17D TZK 25K T
L17D TZK 37K FM T	71.0 (2.795")	53.0 (2.086")	L17D TZK 37K T

Customer Drawing

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
SEE SHEET 1 OF 4				

D-SUB TECHNICAL DATA

Material and finish:

Shell: die-cast, nickel plated

Thumb screws: with metal knob, nickel plated

Screws: Steel, blue zinc plating, pozi drv head

Cable strain relief: Plastic, UL94 V-0, Color Black.

Temperature range: -40°C to +120°C

Cable diameter: 4.0-10.2mm

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DTZK XX K XX T

RoHS Compliance

Series 17DTZK:180°

Position: 9, 15, 25, 37

Bulk Package

T: with threaded backshell, not self-tapping type

FM: Full steel metal screwlock
Blank: plastic knob on screwlock

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
	U.S.		DATE	
.X	+/-	DRAWN	Falta Liu	04/19/16
.XX	+/-	CHECKED	Tony Tang	04/19/16
.XXX	+/-	CHECKED		
FRACTIONS	+/-			
ANGLES	+/-			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol

Metal Hood, DTZK series

SIZE	DRAWING NO.	REV.
A4	L17DTZKXXKXXT	4
SCALE	SHEET 4 OF 4	
NONE		