



Description

- Standard 7 x 5mm SMD crystal
- 4 pad (metal lid)
 - A ceramic package with a seam sealed metal lid, hermetically sealed. 4 pad device metal lid.
- Model: 12SMX-B
- Model Issue number: 13

Frequency Parameters

- Frequency: 24.5760MHz
- Frequency Tolerance: ± 30.00 ppm
- Frequency Stability: ± 50.00 ppm
- Operating Temperature Range: -20.00 to 70.00°C
- Overtone Order: Fundamental
- Ageing: ± 5 ppm per year max

Electrical Parameters

- Load Capacitance: 16.00pF
- Shunt Capacitance: 7pF max
- Drive Level: 100µW max
- ESR: 40.00Ω max

Environmental Parameters

- Storage Temperature Range: -40 to 125°C


Compliance

- RoHS Status (2011/65/EU): Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable


Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000
- Alternative packing option available

This document is correct at the time of printing; please contact your local office for the latest version.

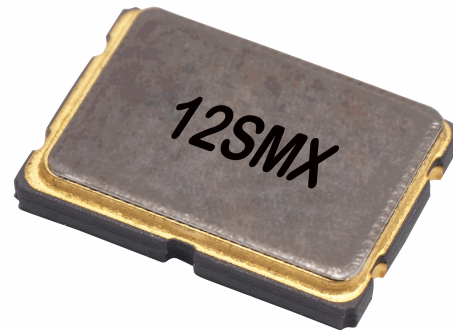

Outline (mm)

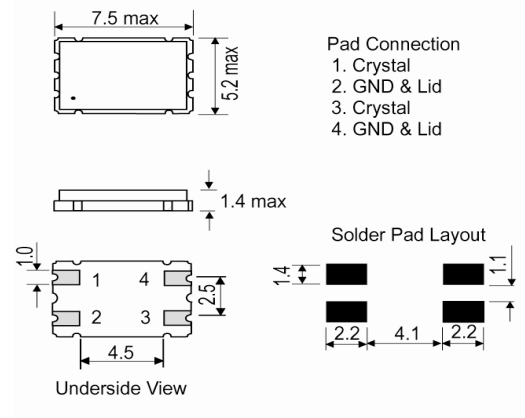

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com