



## Features:

- No UV or IR light radiation.
- Provide 120° beam angles.
- Easy Installation:
- Very Low Power Consumption:  
Less than 4.8Watts/m
- Long lifetime: 25000 hours (L<sub>70</sub>).
- High CRI: 70-80
- Correlated Color Temperature: 2700-12000K
- Operating temperature: -20°C ~ +60°C
- 12V DC input.
- 60 leds per meter, each 3 of Led as one series, each series can be cutted, 5 meter per roll.
- Led type: 3528 LED
- Adhesive Available

## Benefits:

- Energy Cost Savings:  
Over 60% Compared to Incandescent.
- Solid-State:  
High-Shock & High-Vibration Resistant,  
Both Electrical and Mechanical
- Eco-Friendly:  
No Mercury, No Lead Content
- No Hazardous Emissions:  
No UV or IR Radiation
- Constant Light Output:  
Even Lighting, Non-Halation

## Application:

- Advertisement signboard lighting
- Exhibition stand lighting
- Showcase lighting
- Jewelry lighting
- Club lighting
- Bar lighting
- Other lighting

### Product Specifications:

Input Voltage	12V DC
Wattage	4.8W/m
Operating Frequency	50-60Hz
Operating Temperature	-20°C ~ +60°C
Storage Temperature	-30°C ~ +70°C
Net Weight per piece (Kg)	0.095Kg
Certification	RoHS Compliant

### Product Selection Guide:

Product	Beam Angle	Total Lumens	CCT	Color	CRI
LS-3528WW60RN-2	120°	360±5%	2900-3300K	Warm White	≧ 75
LS-3528W60RN-2	120°	370±5%	6000-6500K	White	≧ 70

## LS-/3528/XX/60/RN-2

①      ②      ③      ④      ⑤

① LS: Light Strip


② 3528: LED Type

③ XX: WW(Warm White) W(White)

④ 60: 60 pcs of LED

⑤ RN-2: DC 12V

### Product Dimensions:

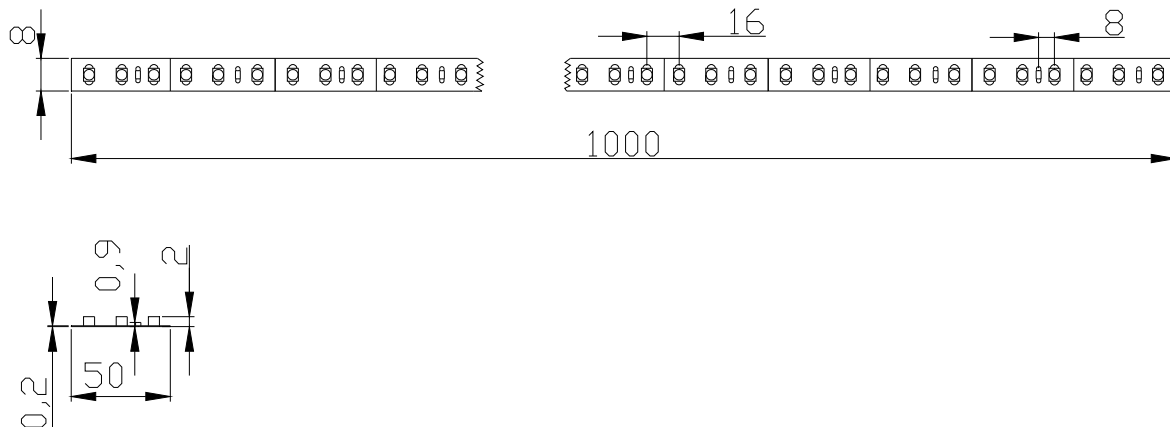

### Notes:

1. All dimensions unit in mm
2. Tolerances is  $\pm 0.5$ mm unless otherwise noted.

### Package Dimension:

