

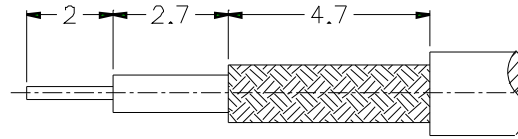
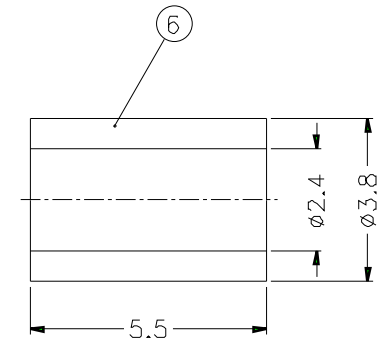


		REVISIONS	
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	

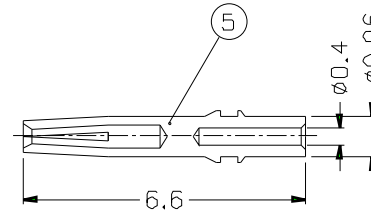

RECOMMENDED
CABLE STRIPPING DIM'S

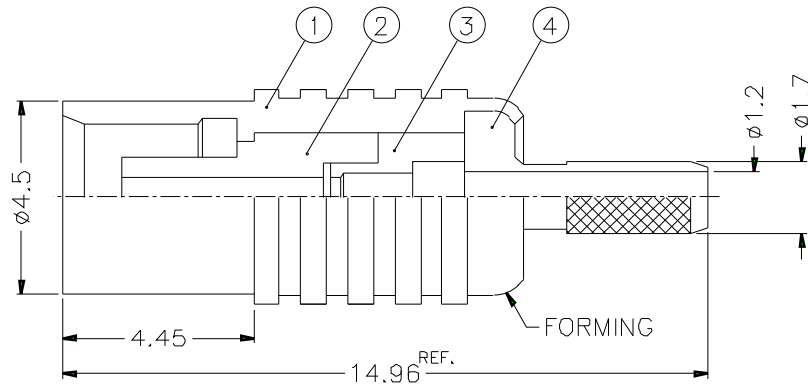

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE (0.7)mm

6	FERRULE	COPPER	NOTE 2	1	FR-38/24X55C
5	CONTACT PIN	NOTE 3	NOTE 4	1	SMB6121B2-5-096/04-C
4	BARREL	NOTE 1	NOTE 2	1	MCX6121A1-4-17/12
3	INSULATOR	NOTE 5	NATURAL	1	SMB6121B2-3T-50
2	INSULATOR	NOTE 5	NATURAL	1	MCX6121A1-2T-50
1	BODY	NOTE 1	NOTE 2	1	MCX6121A1-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	MCX6121A1-3GT30G-14-50		
APPROVED	DATE	10-11-01'	
CHECKED	DATE	10-11-01'	
DRAWN	DATE	10-11-01'	
FILE NO.			

Amphenol	
TITLE	MCX CRIMP JACK (FOR RG-178B/U,196A/U)
DRAWING NO.	KJ-MCX6121A1-3GT30G-196AU-50
ITEM NO.	

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---