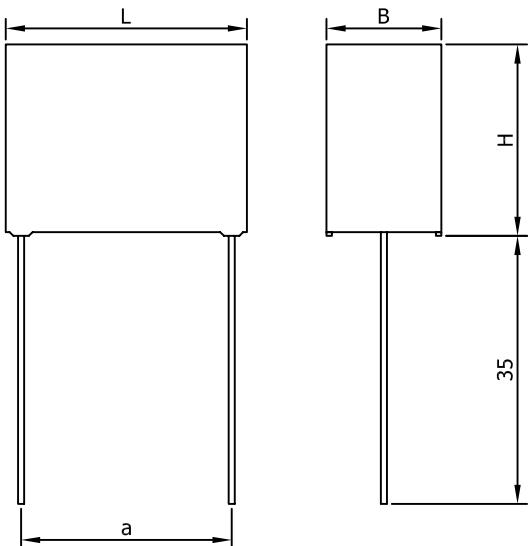


**Kondensator AUDIO**  
**AUDIO Capacitor**

Pojemność znamionowa Rated capacitance $\mu\text{F}$	Tolerancja pojemności Capacitance tolerance %	Wymiary / Dimensions				
		$L \pm 0,5$	$H \pm 0,5$	$B \pm 0,5$	$a$	
0,01	$\pm 2\% / \pm 5\%$	13	10,5	4,5	10,0 $\pm$ 0,5	
0,015			12,5	5,5		
0,022			13,5			
0,033			10,5	15 $\pm$ 0,5		
0,047			12,5			
0,068		18	6,5			
0,1			14,5			
0,15			17,0	8,5		
0,22			15,5	7,5	22,5 $\pm$ 0,7	
0,22		26,5	16,5	8,5		
0,27			18,5	10,5		
0,33			20,5	11,5		
0,47			23,5	13,5	27,5 $\pm$ 0,7	
0,68			24,5	15,0		
1,0		31,5	28,5	16,0	37,5 $\pm$ 0,7	
1,5			31,5	28,5		
2,2		41,5	31,5	28,5		

Istnieje możliwość uzgodnienia innych pojemności oraz długości i rodzaju wyprowadzeń.  
Other capacitance values and terminal lengths and types can be agreed upon request.

## Dane Techniczne / Technical data:

Napięcie znamionowe      600VDC  
Rated voltage

(Uwagi/Notes)

1. Wyrób spełnia wymagania Dyrektywy RoHS (2011/65/WE).

This product fulfils the requirements of the RoHS Directive (2011/65/EC).

Tg kąta stratności      <0,0010 @ 1kHz  
Dissipation factor

Kategoria klimatyczna      025/085/21/C  
Climatic category

Wymiary      zgodnie z tabelą  
Dimensions      acc. to table

PRZYKŁADOWY NADRUK  
PRINTING LAYOUT EXAMPLE



## Description:

The MKP-02 capacitors, made from metallized polypropylene film, are designed for use in audio equipment. The design of the capacitors minimizes the parasitic impedance components: inductance and resistance, resulting in improved quality of sound in a given audio system. High quality and durability of the capacitors is assured by the use of carefully selected materials, production technology, as well as testing and measuring methods. These capacitors feature the use of a dielectric material with the property of self-healing during operation, impregnation of the capacitor element in oil, radial terminals made of tinned copper wire, box-shaped plastic housing, and self-extinguishing potting compound of flammability class V0.

The capacitors are furthermore subjected to a series of specific tests and measurements, including a unique test using pulses of increased current amplitude and frequency of 22kHz.

The MKP-02 capacitors can be used in d.c. and a.c. circuits within the temperature range of their climatic category. The d.c. voltage value or a.c. voltage amplitude should not exceed the specified rated voltage.



 **MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOSYNTETYCZNYCH  
99-300 KUTNO, UL. GRUNWALDZKA 3 POLAND

Chief Engineering Specialist	+48 24 355 12 10
Design Department	+48 24 355 12 77
Production Engineering Department	+48 24 355 12 77
Fax	+48 24 355 11 88
E-mail	miflexsa@miflex.com.pl

Strona/  
Page

1/1

Data aktualizacji/  
Revision date

10.06.2015.