



## Multiflex SLI: flexible and extra corrosion resistant

SLI is a very flexible stainless steel conduit that provides excellent mechanical and chemical protection for cables in applications that require a high degree of corrosion protection, but where liquid tightness is not a pre-requirement. Typical applications include the steel, foundry, marine and shipbuilding industries.

### Classification according NEN-EN-IEC 61386:

**Compression resistance:** Class 4, Heavy (1250 N).

**Impact resistance:** Class 4, Heavy (6 J).

**Tensile strength:** Class 4, Heavy (1000 N).

**Protection class:** IP 40.

### Material & Construction:

**Material:** Stainless steel (AISI-304). Also available in AISI-316 see page 1-04.

**Construction:** square-locked design.

**Temperature:** -100 °C to +600 °C.



Square locked

ANACONDA  
MULTIFLEX

CONDUIT  
TYPE  
SLI

SLI	Diametre		Bending radius		Standard carton		Small carton		Reels		Weight (Kg/m)
	Size (Inch)	Inside (mm)	Outside (mm)	Static (mm)	Dynamic (mm)	Metre	Article No.	Metre	Article No.	Metre	
5/16"	10,1	12,8	50	65	30	600.010.2	-	-	-	-	0,15
3/8"	12,6	15,5	60	85	30	600.012.2	-	-	-	-	0,24
1/2"	16,0	18,9	75	110	30	600.016.2	-	-	-	-	0,26
3/4"	21,0	23,9	90	140	30	600.020.2	-	-	-	-	0,41
1"	26,5	30,0	120	170	30	600.026.2	-	-	-	-	0,55
1.1/4"	35,1	38,7	135	215	30	600.035.2	-	-	-	-	0,63

\* For sizes 1.1/2" and 2" we advise to use the interlocked designed conduit type UI (see page 1-22)

\* On demand the SLI conduits are available also in production reels with longer lengths (codes change in 600.xxx.0)

The fittings for Multiflex SLI are outlined on pages 1-09 and 1-15.



Size SLI	Inch	1/4"	5/16"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Fittings	ISO	M12-M16	M16-M20	M16-M20	M20	M25	M32	M40	M50	M63	M75	M90	M105
	PG	7	9 - 11	11 - 13,5	16	21	29	36	42	48	-	-	-
	NPT	-	-	1/2"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"



## Multiflex SLI316: flexible and very high corrosion resistant

SLI is a very flexible stainless steel conduit that provides excellent mechanical and chemical protection for cables in applications that require a very high degree of corrosion protection, but where liquid tightness is not a pre-requirement. Typical applications include the steel, foundry, offshore, marine and shipbuilding industries.

### Material & Construction:

**Material:** Stainless steel (AISI-316).

**Construction:** square-locked design.

**Temperature:** -100 °C to +600 °C.

### Classification according NEN-EN-IEC 61386:

**Compression resistance:** Class 4, Heavy (1250 N).

**Impact resistance:** Class 4, Heavy (6 J).

**Tensile strength:** Class 4, Heavy (1000 N).

**Protection class:** IP 40.



Square locked

ANACONDA  
MULTIFLEX

CONDUIT  
TYPE  
SLI-316

SLI-316	Diameter		Bending radius		Standard carton		Small carton		Reels		Weight (Kg/m)
	Size (Inch)	Inside (mm)	Outside (mm)	Static (mm)	Dynamic (mm)	Metre	Article No.	Metre	Article No.	Metre	
5/16"	10,1	12,8	50	65	30	600.610.2	-	-	-	-	0,15
3/8"	12,6	15,5	60	85	30	600.612.2	-	-	-	-	0,24
1/2"	16,0	18,9	75	110	30	600.616.2	-	-	-	-	0,26
3/4"	21,0	23,9	90	140	30	600.620.2	-	-	-	-	0,41
1"	26,5	30,0	120	170	30	600.626.2	-	-	-	-	0,55
1.1/4"	35,1	38,7	135	215	30	600.635.2	-	-	-	-	0,63

\* On demand the SLI-316 conduits are available also in production reels with longer lengths (codes change in 600.6xx.0)

The fittings for Multiflex SLI-316 are outlined on pages 1-09 till 1-15.



Size SLI-316	Inch	1/4"	5/16"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Fittings	ISO	M12-M16	M16-M20	M16-M20	M20	M25	M32	M40	M50	M63	M75	M90	M105
	PG	7	9 - 11	11 - 13,5	16	21	29	36	42	48	-	-	-
	NPT	-	-	1/2"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"



## Anaconda Compact nickel plated brass fittings for Multiflex SL / SLI

The nickel plated fittings series "compact" developed for Anaconda Sealtite conduits, can be used also for SL/SLI conduits replacing the standard polyamide clamping ring with a metal clamping ring adapter for SL/SLI, hereunder illustrated. These compact fittings have a shorter thread and are lighter in weight than their standard Anaconda counterpart described on pages 1-12 until 1-15, but their quality remains very high. All ferrules have been machine turned to ensure a neat fit while the high quality finish of the nickel plated brass fittings protects them against corrosion and gives them a nice appearance.

### Material & Construction:

**Construction:** Nickel plated brass fitting, consisting of 4 parts (counter nut, clamping ring, ferrule and body).

**Material:** Counter nut, clamping ring, ferrule and body are nickel plated brass. O-rings are from NBR (black for ISO metric and blue).

**Temperature:** -55 °C till +260 °C continuous.

**Protection class:** IP 40.

**Colour:** Metal.


### Clamping ring, nickel plated brass, for combination with Multiflex type SL / SLI.



Thread	SL/SLI	Min. Internal Bore (mm)	Fitting thread size			Standard Package	Article Number	Weight (Kg/100)
	Size (inch)		ISO	Pg	NPT			
-	5/16"	8,3	M16 x 1,5	Pg 9	1/2" NPT	10	817.310.6*	2,2
-	3/8"	-	M16 x 1,5	Pg 11	1/2" NPT	10	817.213.6	0,6
-	1/2"	-	M20 x 1,5	Pg 16	1/2" NPT	10	817.216.6	0,6
-	3/4"	-	M25 x 1,5	Pg 21	3/4" NPT	5	817.220.6	1,0
-	1"	-	M32 x 1,5	Pg 29	1" NPT	5	817.226.6	1,2
-	1.1/4"	-	M40 x 1,5	Pg 36	1.1/4" NPT	2	817.235.6	2,0

\* Set consists of a clamping and ferrule.

### ISO straight compact fitting, male, nickel plated brass (including metal clamping ring).




Thread	SL/SLI	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
	Size (inch)		A	B	C	D	E			
M16 x 1,5	5/16"	8,3	30	10	26	-	24	10	712.015.6	4,4
M20 x 1,5	5/16"	8,3	30	10	26	-	24	10	712.014.6	4,5
M16 x 1,5	3/8"	10,4	30	10	26	-	24	10	712.016.6	4,4
M20 x 1,5	3/8"	10,4	30	10	26	-	24	10	712.017.6	4,5
M20 x 1,5	1/2"	13,8	32	10	29	-	27	10	712.020.6	5,3
M25 x 1,5	3/4"	18,5	33	10	35	-	33	5	712.025.6	7,8
M32 x 1,5	1"	23,8	36	12	45	-	44	5	712.032.6	14,4
M40 x 1,5	1.1/4"	31,9	40	13	53	-	50	2	712.040.6	19,1

ANACONDA  
MULTIFLEX


FITTINGS FOR  
TYPE SL / SLI  
IP 40

**ISO straight swivel fitting, male, nickel plated brass  
(including metal clamping ring).**




Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	E	F			
M16 x 1,5	5/16"	8,3	48	10	26	24	21	10	813.015.6	8,3
M16 x 1,5	3/8"	10,4	48	10	26	24	21	10	813.016.6	8,3
M20 x 1,5	1/2"	13,8	49	10	29	27	25	10	813.020.6	10,5
M25 x 1,5	3/4"	17,4	49	10	35	33	31	5	813.025.6	14,8
M32 x 1,5	1"	23,4	55	12	45	42	38	5	813.032.6	33,7
M40 x 1,5	1.1/4"	29,4	58	14	54	50	48	2	813.040.6	55,0

**Pg straight compact fitting, male, nickel plated brass  
(including metal clamping ring).**

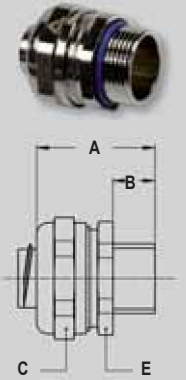


Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg 11	3/8"	10,4	30	10	26	-	24	10	710.011.6	4,8
Pg 13,5	3/8"	10,4	30	10	26	-	24	10	710.013.6	4,6
Pg 16	1/2"	13,8	32	10	29	-	27	10	710.016.6	5,3
Pg 21	3/4"	18,5	33	10	35	-	33	5	710.021.6	7,8
Pg 29	1"	23,8	36	12	45	-	44	5	710.029.6	14,4
Pg 36	1.1/4"	31,9	40	13	53	-	52	2	710.036.6	19,1

**NPT straight compact fitting, male, nickel plated brass  
(including metal clamping ring).**

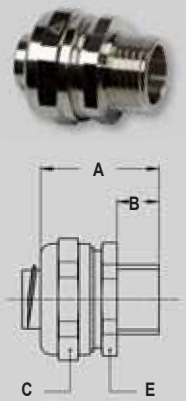

Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
NPT 1/2"	3/8"	10,4	32	12	26	-	24	10	714.012.6	4,8
NPT 1/2"	1/2"	13,8	34	12	29	-	27	10	714.016.6	5,7
NPT 3/4"	3/4"	18,5	35	12	35	-	33	5	714.020.6	8,2
NPT 1"	1"	23,8	37	13	45	-	44	5	714.026.6	14,7
NPT 1.1/4"	1.1/4"	31,9	42	15	53	-	52	2	714.035.6	22,4

**Conduit connector, nickel plated brass  
(including metal clamping ring).**



Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
-	5/16"	8,3	41	-	26	-	24	10	784.010.6	8,6
-	3/8"	10,4	41	-	26	-	24	10	784.012.6	8,6
-	1/2"	13,8	45	-	29	-	24	10	784.016.6	10,0
-	3/4"	18,5	48	-	35	-	33	5	784.020.6	15,0
-	1"	23,8	53	-	45	-	44	5	784.026.6	27,6
-	1.1/4"	31,9	58	-	53	-	50	2	784.035.6	36,6

**ANACONDA  
MULTIFLEX**

**FITTINGS FOR  
TYPE SL / SLI  
IP 40**



## Anaconda nickel plated brass fittings for Multiflex SL / SLI.

These nickel plated brass Anaconda fittings can be used with all types of Anaconda Multiflex (except RWA). This Anaconda fitting is the most used universal fitting and offers great corrosion protection in combination with a nice appearance. By using the SL/SLI connection set consisting of a special turned ferrule and clamping ring, a very high pull-out strength is achieved. Besides the mentioned straight fittings also 45° and 90° fittings are possible. The connection set can be combined with all types of Anaconda fittings both nickel plated brass and stainless steel (see chapter 5). The connection set will be supplied separately.



### Material & Construction:

**Construction:** Nickel plated brass fitting, consisting of 4 parts (counter nut, clamping ring, ferrule and body).

**Material:** Counter nut, clamping ring, ferrule and body are nickel plated brass. Inserts are from PA6 (red for ISO metric, blue for Pg and white for NPT).

**Temperature:** -55 °C till +260 °C continuous.

**Protection class:** IP 40, (cable-hose fittings are IP 68 on the switchbox).

**Colour:** Metal.

ANACONDA  
MULTIFLEX


### Connection set, nickel plated brass, for combination with Multiflex type SL / SLI.



Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Fitting thread size			Standard Package	Article Number	Weight (Kg/100)
			ISO	Pg	NPT			
-	5/16"	8,3	M16 x 1,5	Pg 11	1/2" NPT	10	817.210.6*	0,1
-	3/8"	10,2	M16 x 1,5	Pg 11	1/2" NPT	10	817.312.6	2,2
-	1/2"	13,6	M20 x 1,5	Pg 16	1/2" NPT	10	817.316.6	2,6
-	3/4"	18,5	M25 x 1,5	Pg 21	3/4" NPT	5	817.320.6	3,8
-	1"	23,8	M32 x 1,5	Pg 29	1" NPT	5	817.326.6	4,2
-	1.1/4"	31,8	M40 x 1,5	Pg 36	1.1/4" NPT	2	817.235.6*	2,8

\* Set consists of a clamping ring only.


### ISO straight fitting, male, nickel plated brass (including connection set).



Thread ISO	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	5/16"	8,3	35	12	26	-	24	10	812.015.6	4,8
M20 x 1,5	5/16"	8,3	36	13	26	-	24	10	812.014.6	5,1
M16 x 1,5	3/8"	10,2	35	12	26	-	24	10	812.016.6	6,6
M20 x 1,5	3/8"	10,2	36	13	26	-	24	10	812.017.6	6,9
M20 x 1,5	1/2"	13,6	37	13	29	-	27	10	812.020.6	7,7
M25 x 1,5	3/4"	18,5	40	15	35	-	33	5	812.025.6	10,9
M32 x 1,5	1"	23,8	46	15	45	-	43	5	812.032.6	20,5
M40 x 1,5	1.1/4"	31,8	52	16	54	-	52	2	812.040.6	30,7


FITTINGS FOR  
TYPE SL / SLI  
IP 40

**ISO straight fitting, female, nickel plated brass  
(including connection set).**




Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	5/16"	8,3	35	12	26	-	24	10	812.315.6	5,0
M16 x 1,5	3/8"	10,2	35	12	26	-	24	10	812.316.6	6,8
M20 x 1,5	1/2"	13,6	37	13	29	-	27	10	812.320.6	9,4
M25 x 1,5	3/4"	18,5	40	15	35	-	33	5	812.325.6	12,0
M32 x 1,5	1"	23,8	46	15	45	-	43	5	812.332.6	21,3
M40 x 1,5	1.1/4"	31,8	52	16	54	-	52	2	812.340.6	32,2

**ISO cable-hose fitting, male, nickel plated brass  
(including connection set).**



Thread	SL/SLI Size (inch)	Clamping Range (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	E	F			
M16 x 1,5	5/16"	4 - 8	57	12	26	24	18	10	812.715.6	6,0
M16 x 1,5	3/8"	4 - 8	57	12	26	24	18	10	812.716.6	9,6
M20 x 1,5	3/8"	6 - 10,2	57	12	26	24	22	10	812.717.6	11,3
M20 x 1,5	1/2"	6 - 12	59	12	29	27	22	10	812.720.6	11,5
M25 x 1,5	1/2"	10 - 13,6	62	12	29	27	27	5	812.722.6	13,5
M32 x 1,5	3/4"	13 - 18	70	15	35	33	34	5	812.728.6	23,2
M40 x 1,5	1"	18 - 23,8	83	15	45	43	43	2	812.735.6	35,6

**ISO 90° fitting, male, nickel plated brass  
(including connection set).**




Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	5/16"	8,3	32	12	26	42	22	10	812.915.6	8,2
M20 x 1,5	5/16"	8,3	33	13	26	42	22	10	812.914.6	8,4
M16 x 1,5	3/8"	10,2	32	12	26	42	22	10	812.916.6	10,0
M20 x 1,5	3/8"	10,2	33	13	26	42	22	10	812.917.6	10,2
M20 x 1,5	1/2"	13,6	36	13	29	43	27	10	812.920.6	14,4
M25 x 1,5	3/4"	18,5	43	15	35	48	33	5	812.925.6	22,2
M32 x 1,5	1"	23,8	48	15	45	59	42	5	812.932.6	34,6
M40 x 1,5	1.1/4"	31,8	57	16	54	68	51	2	812.940.6	58,9

**ANACONDA  
MULTIFLEX**


**FITTINGS FOR  
TYPE SL / SLI  
IP 40**

**Pg straight fitting, male, nickel plated brass  
(including connection set).**




Thread	SL/SLI Pg	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg 9	5/16"	8,3	35	12	26	-	24	10	810.009.6	4,8
Pg 11	5/16"	8,3	35	12	26	-	24	10	810.012.6	5,6
Pg 9	3/8"	10,2	35	12	26	-	24	10	810.010.6	6,6
Pg 11	3/8"	10,2	35	12	26	-	24	10	810.011.6	7,4
Pg 13,5	3/8"	10,2	35	12	26	-	24	10	810.013.6	7,4
Pg 16	1/2"	13,6	37	13	29	-	27	10	810.016.6	8,1
Pg 21	3/4"	18,5	40	15	35	-	33	5	810.021.6	11,4
Pg 29	1"	23,8	46	15	45	-	43	5	810.029.6	28,0
Pg 36	1.1/4"	31,8	52	16	54	-	52	2	810.036.6	37,4

**Pg straight fitting, female, nickel plated brass  
(including connection set).**




Thread	SL/SLI Pg	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg 11	5/16"	8,3	35	12	26	-	24	10	810.312.6	5,3
Pg 13,5	5/16"	8,3	35	12	26	-	24	10	810.314.6	5,6
Pg 11	3/8"	10,2	35	12	26	-	24	10	810.311.6	7,1
Pg 13,5	3/8"	10,2	35	12	26	-	24	10	810.313.6	7,4
Pg 16	1/2"	13,6	37	13	29	-	27	10	810.316.6	8,1
Pg 21	3/4"	18,5	40	15	35	-	33	5	810.321.6	12,3
Pg 29	1"	23,8	46	15	45	-	43	5	810.329.6	23,7
Pg 36	1.1/4"	31,8	52	16	54	-	52	2	810.336.6	32,1

**Pg 90° fitting, male, nickel plated brass  
(including connection set).**



Thread	SL/SLI Pg	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg 11	5/16"	8,3	32	12	26	42	22	10	810.912.6	8,9
Pg 13,5	5/16"	8,3	32	12	26	42	22	10	810.914.6	8,9
Pg 11	3/8"	10,2	32	12	26	42	22	10	810.911.6	10,7
Pg 13,5	3/8"	10,2	32	12	26	42	22	10	810.913.6	10,7
Pg 16	1/2"	13,6	36	13	29	43	27	10	810.916.6	17,1
Pg 21	3/4"	18,5	43	15	35	48	33	5	810.921.6	24,6
Pg 29	1"	23,8	48	15	45	59	42	5	810.929.6	38,3
Pg 36	1.1/4"	31,8	57	16	54	68	51	2	810.936.6	65,3

**Pg cable-hose fitting, male, nickel plated brass  
(including connection set).**



Thread	SL/SLI Pg	Clamping Range (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	E	F			
Pg 9	5/16"	5 - 8	55	10	26	24	17	10	810.709.6	7,8
Pg 9	3/8"	5 - 8	55	10	26	24	20	10	810.712.6	9,6
Pg 11	3/8"	5 - 9,8	55	10	26	24	20	10	810.711.6	11,3
Pg 13,5	1/2"	6 - 12	57	10	29	27	22	10	810.715.6	11,5
Pg 16	1/2"	10 - 13,9	60	10	29	27	24	10	810.716.6	13,5
Pg 21	3/4"	13 - 18	67	12	35	33	30	5	810.721.6	22,6
Pg 29	1"	18 - 22,8	80	12	45	43	40	5	810.729.6	38,4

**ANACONDA  
MULTIFLEX**

**FITTINGS FOR  
TYPE SL / SLI  
IP 40**



## Anaconda compact fittings, UL & CSA, stainless steel AISI-304, for Multiflex SLI.

These stainless steel AISI-304 Anaconda fittings can be used with all types of Anaconda Multiflex (except RWA). This Anaconda fitting is the most used universal fitting and offers great corrosion protection in combination with a nice appearance. By using the SL/SLI connection set consisting of a special clamping ring, a very high pull-out strength is achieved. The connection set will be supplied separately.

### Material & Construction:

**Construction:** Stainless steel AISI-304 fitting, consisting of 4 parts (counter nut, clamping ring, ferrule and body).

**Material:** Counter nut, ferrule and body are stainless



steel AISI-304. The clamping ring is made of nickel plated brass. O-rings are from NBR (black for ISO metric and blue).

**Temperature:** -55 °C till +260 °C continuous.

**Protection class:** IP 40.

**Colour:** Metal.




### Clamping ring, nickel plated brass, for combination with Multiflex type SL / SLI.



Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Fitting thread size			Standard Package	Article Number	Weight (Kg/100)
			ISO	Pg	NPT			
-	3/8"	-	M16 x 1,5	Pg 11	1/2" NPT	10	817.213.6	0,6
-	1/2"	-	M20 x 1,5	Pg 16	1/2" NPT	10	817.216.6	0,6
-	3/4"	-	M25 x 1,5	Pg 21	3/4" NPT	5	817.220.6	1,0
-	1"	-	M32 x 1,5	Pg 29	1" NPT	5	817.226.6	1,2
-	1.1/4"	-	M40 x 1,5	Pg 36	1.1/4" NPT	2	817.235.6	2,0

### ISO straight fitting, compact, stainless steel AISI-304 (including metal clamping ring).




Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	3/8"	11,0	31	10	26	-	24	10	712.016.96	3,9
M20 x 1,5	3/8"	11,0	31	10	26	-	24	10	712.017.96	4,0
M20 x 1,5	1/2"	14,5	32	10	29	-	27	10	712.020.96	4,4
M25 x 1,5	3/4"	19,4	33	10	35	-	33	5	712.025.96	6,6
M32 x 1,5	1"	24,7	36	12	45	-	42	5	712.032.96	11,7
M40 x 1,5	1.1/4"	33,3	40	13	53	-	50	2	712.040.96	16,0

ANACONDA  
MULTIFLEX

FITTINGS FOR  
TYPE SL / SLI  
IP 40



**NPT straight compact fitting, male, stainless steel AISI-304  
(including metal clamping ring).**



Thread	SL/SLI Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
<b>NPT 1/2"</b>	<b>3/8"</b>	11,0	32	12	26	-	24	<b>10</b>	<b>714.012.96</b>	4,8
<b>NPT 1/2"</b>	<b>1/2"</b>	14,5	34	12	29	-	27	<b>10</b>	<b>714.016.96</b>	5,7
<b>NPT 3/4"</b>	<b>3/4"</b>	19,4	35	12	35	-	33	<b>5</b>	<b>714.020.96</b>	8,2
<b>NPT 1"</b>	<b>1"</b>	24,7	37	13	45	-	44	<b>5</b>	<b>714.026.96</b>	14,7
<b>NPT 1.1/4"</b>	<b>1.1/4"</b>	33,3	42	15	53	-	52	<b>2</b>	<b>714.035.96</b>	22,4

**ANACONDA  
MULTIFLEX**

**FITTINGS FOR  
TYPE SL / SLI  
IP 40**