

## **Product information** N11R AM 5

http://www.e-catalog.beldensolutions.com/link/57078-24228-256281-256284-24367-24372-36306/en/conf/uistate	
Name	N11R AM 5
	Panel-mounted connector with metal screw-in casing (metall segment)
Delivery informations	
Availability	available
Product description	
Description	Panel-mounted connector with metal screw-in casing (metall segment)
Туре	N11R AM 5
Order No.	932 627-106
Type of contact	male
Number of contacts	11 + PE
Conductor size	max. 0.5 mm <sup>2</sup>
Standard	DIN 43651
Housing Color	grey
Technical data	
Pin dimensions	1.6 mm
Rated voltage	AC/DC 60 V
Rated current	5 A
Contact resistance	<= 5 m0hm
Type of termination	crimp
Suitable cables	0.14 mm <sup>2</sup> to 0.5 mm <sup>2</sup>
Mounting	PG 13,5
Material	
Contact surface material	Ag
Contact bearer material	PET
Housing material	PET
Environmental conditions	
Protection class (IEC 60529)	IP 65
Temperature range	-40 °C to +90 °C
Packing unit	
Packaging unit	10 pieces
Scope of delivery and accessories	
Scope of delivery	1 panel-mounted connector, not assembled, in polythene bag with assembly instructions








## Industrial Connecting Solutions:Circular Connectors:MIL, DIN, Universal Connectors:DIN 43651 Connectors (NR series):Panel-mounted connector:N11R AM 5 http://www.e-catalog.beldensolutions.com/link/57078-24228-256281-256284-24367-24372-36306/en/conf/uistate Picture

Drawing

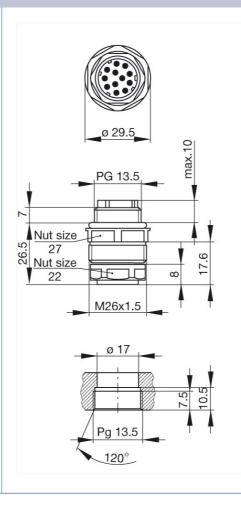

## Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle Germany Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

