


Features:

- 600V volts rating (R.M.S.)
- Thickness: 0.2mm

Specifications:

- Voltage rating: 600V AC, DC
- Current rating up to 9A(with #18 AWG)
- Dielectric withstanding Voltage: 1500V AC/minute
- Contact resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.
- Crimp resistance: 5mΩ max,
- Terminal retention force: 3.0Kg min.
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

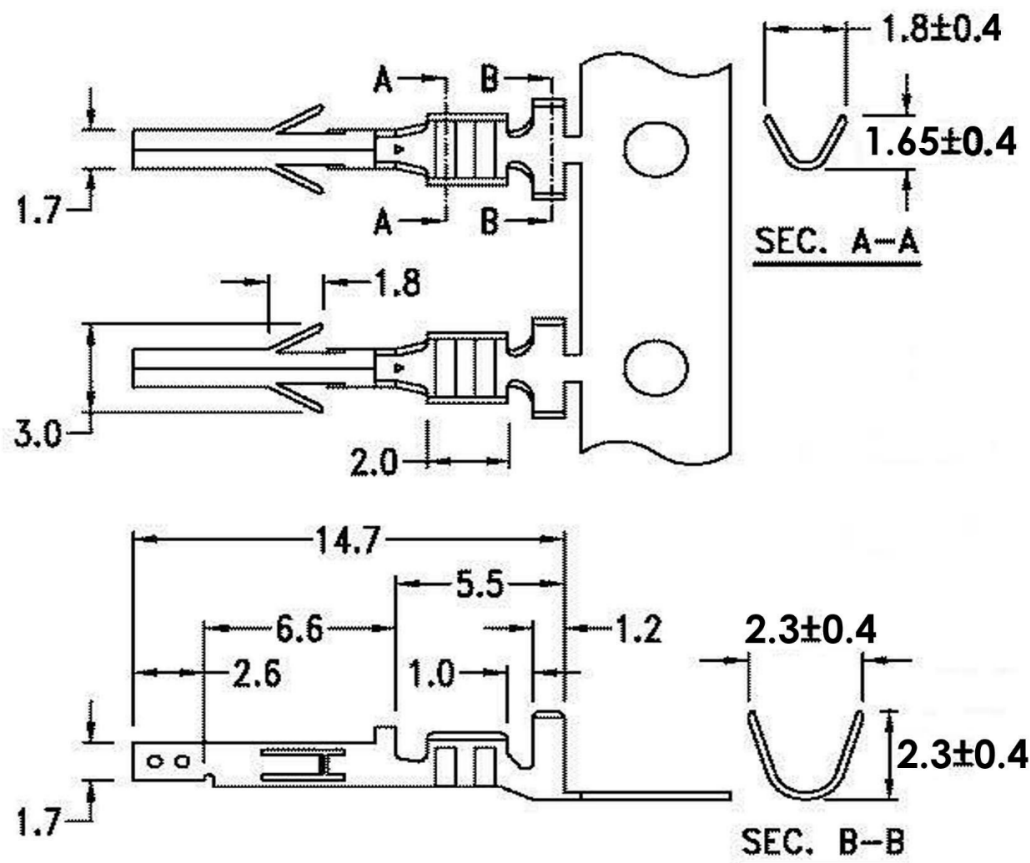

RoHS
Compliant

Ninigi

APPD.
核准
BETTY
DWG.
製圖
BETTY
DATE 制表日
2009/06/29

SCALE
比例
參考
UNIT
單位
M M
PAGE
張數
1 OF 1

TOLERANCE
容許公差
.0 ±0.4
.00 ±0.25
ANG. ±
SIZE.
紙張尺寸
A 4
REV.
版次
A

PART NAME
4.2mm FEMALE TERMINAL BRASS MATERIAL
TIN PLATING 22~28AWG ROHS

PART NO.
N42W-T2