

## LED light bar OPBxx3014-21024WO - PRODUCT DATASHEET



<b>Voltage</b>	24 V DC
<b>Power</b>	18,0 W/m
<b>Luminocity</b>	1900 lm/m
<b>Qty LED</b>	210 LED/m
<b>Distance between LED</b>	4,76 mm
<b>Can be cut into section</b>	3,33 cm

Powered by



### Basic information:


- PL LINE PRODUCT- PROFESSIONAL LINE, HIGHEST QUALITY, LUMINOSITY AND DURABILITY
- PROFESSIONAL PCB MOUNTING, ONLY BRAND-NAME LED DIODES (OSRAM)
- THICK DIODES SPACING ALLOWS TO CREATE CONSISTENT LIGHT LINE
- MODULES CAN BE JOINED INTO LONGER STRINGS (MAXIMUM LENGHT OF LED SECTION WITH ONE POWER-SUPPLY POINT: 5M), NEEDS COOLING

### Typical application:

- UTILITY LIGHTING
- CEILING, WALL, NICHE, SHELF, PASSAGeways BACKLIGHTING
- ADVERTISING (SIGNBOARDS): SHOP, MUSEUM, TARDE FAIRS EXPOSITIONS ETC.
- POWERFUL UTILITY LIGHTING

### Explanation:

- "xx" - COLOR DESIGNATION E.G. WH, WN AND WW

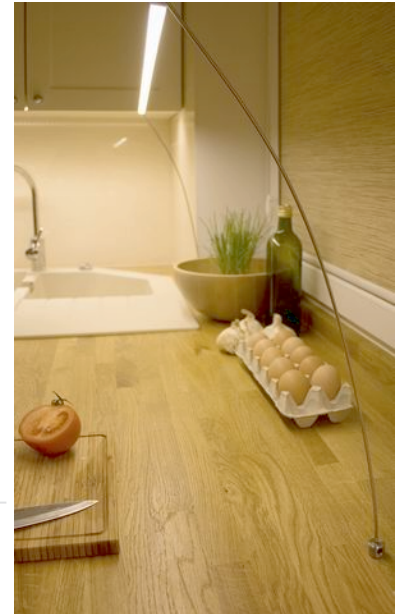

UWAGA  
ZACHWAŻ OSTRÓŻNOŚĆ  
ELEMENTY WRAŻLIWE  
NA WYSOKOPRĄDZĄCĄ  
ELEKTROSTATYCZNE




PRODUKT WYKONANY  
Z PRODUKTÓW  
ZGODNYCH Z NORMĄ  
RoHS



IP20

### Additional Information

Color	Cool white WH	Neutral white WN	Warm white WW	Warm white WW
<b>Voltage</b>			24 V DC	
<b>Power</b>			18,0 W/m	
<b>Power of single LED</b>			0,10 W	
<b>Current</b>			0,75 A/m	
<b>Luminocity</b>	1900 lm/m	1900 lm/m	1840 lm/m	1660 lm/m
<b>Qty LED</b>			210 LED/m	
<b>Distance between LED</b>			4,76 mm	
<b>Can be cut into section</b>			3,33 cm	
<b>Width</b>			10 mm	
<b>Height</b>			3 mm	
<b>Color temperature / Wavelength scope</b>	5700 K	4000 K	3000 K	2700 K
<b>Beam angle</b>			120°	
<b>Color rendering index (Ra)</b>			80	
<b>Operating temperature</b>			-25 - +60°C	
<b>Storage temperature</b>			-40 - +80°C	
<b>IP degree</b>			IP20	

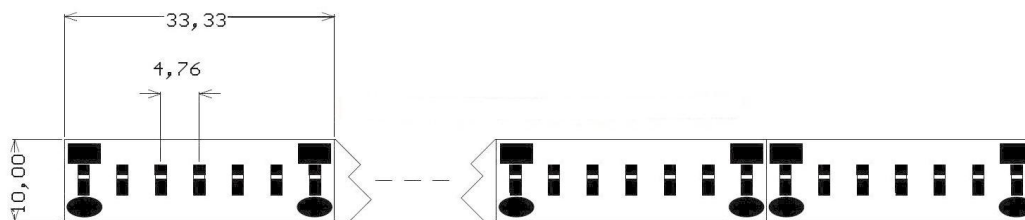

In spite of all our efforts, we do not guarantee, that technical data doesn't include any mistakes or defects, which can't be basis of any claiming. Figures and pictures are for illustration only and can be different from authentic appearance of product.