

SPECIFICATIONS


CUSTOMER	:	
SAMPLE CODE	:	SH192108T004-ZAC
MASS PRODUCTION CODE	:	PH192108T004-ZAC
SAMPLE VERSION	:	01
SPECIFICATIONS EDITION	:	001
DRAWING NO. (Ver.)	:	LMD- PH192108T004-ZAC (Ver.001)
PACKAGING NO. (Ver.)	:	-

Customer Approved

Date:

Approved	Checked	Designer
林裘中 Daniel Lin	呂清溪 Marcs Lu	陳漢霖 Hans Chen

- ☒ Preliminary specification for design input
☐ Specification for sample approval



POWERTIP TECH. CORP.

Headquarters: No.8, 6th Road, Taichung Industrial Park,
Taichung, Taiwan
台中市 407 工業區六路 8 號

TEL: 886-4-2355-8168

FAX: 886-4-2355-8166

E-mail: sales@powertip.com.tw

[Http://www.powertip.com.tw](http://www.powertip.com.tw)

History of Version

[illegible]

CONTENTS

1. SPECIFICATIONS

- 1.1 Features**
- 1.2 Mechanical Specifications**
- 1.3 Absolute Maximum Ratings**
- 1.4 TFT LCD Characteristics**
- 1.5 Optical Characteristics**
- 1.6 Backlight Characteristics**
- 1.7 Touch Panel Characteristics**

2. MODULE STRUCTURE

- 2.1 Counter Drawing**
- 2.2 Interface Pin Description**
- 2.3 Power Supply Characteristics**
- 2.4 Timing Characteristics**

3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart**
- 3.2 Inspection Specification**

4. RELIABILITY TEST

- 4.1 Reliability Test Condition**

5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety**
- 5.2 Handling**
- 5.3 Storage**
- 5.4 Terms of Warranty**

APPENDIX

- 1. Drawing**

1. SPECIFICATIONS

1.1 Features

Item	Standard Value
Screen Size (Inch)	23.8" (Real Diagonal)
Resolution	1920* (R、G、B) * 1080 Dots
Display Mode	Transmissive, Normally Black
Display Colors	16.7M
Display Interface	Dual-Channel LVDS, 4-lane per Channel
Touch type	Projective capacitive touch panel
Touch Method	Finger / 10 Points touch
Touch Interface	USB
Touch IC	ILI2521
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer web site: http://www.powertip.com.tw/news.php?area_id_view=1085560481/

1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	570.0(W) * 334.3 (L) * 20 (H)Max	mm

LCD panel

Item	Standard Value	Unit
Active Area	527.04 (W) * 296.46 (L)	mm

Note: For detailed information please refer to LCM drawing.

1.3 Absolute ratings of environment

Item	Symbol	Condition	Min.	Max.	Unit	Note
Operating Temperature	T _{OP}	-	0	+50	°C	(1)
Storage Temperature	T _{ST}	-	-20	+60	°C	(1), (2)

Note (1) Temperature and relative humidity range is shown in the figure below

(a) 90 %RH Max.

(b) Wet-bulb temperature should be 39 °C Max.

(c) No condensation.

Note (2) The absolute maximum rating values of this product are not allowed to be exceeded at any times.

The module should not be used over the function fail in such a condition.

1.4 TFT LCD Characteristics

Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Power Supply Voltage for TFT LCD Module	V _{CC}	-	-0.3	+6.0	V
Logic Input Voltage for TFT LCD Module	V _{IN}	-	-0.3	+3.6	V

The absolute maximum rating values of this product are not allowed to be exceeded at any times.

Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.


LCD ELETRONICS SPECIFICATION

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Power Supply Voltage	V _{CC}	4.5	5.0	5.5	V	-
Ripple Voltage	V _{RP}	-	-	300	mV	-
Rush Current	I _{RUSH}	-	-	3	A	-
Power Supply Current	-	-	0.55	0.77	A	-
Power Consumption	PLCD	-	3.5	4.1	Watt	(1)
LVDS differential input voltage	VID	100	-	600	mV	(2)
LVDS common input voltage	VCM	1.0	1.2	1.4	V	(2)
LVDS Logic High Input Voltage	VTH	-	-	0.1	V	(2)
LVDS Logic Low Input Voltage	VTL	-0.1	-	-	V	(2)


Note (1) The power consumption is specified at the pattern with the maximum current.

Note (2) The LVDS input characteristics are as follows:

Single-end Signals

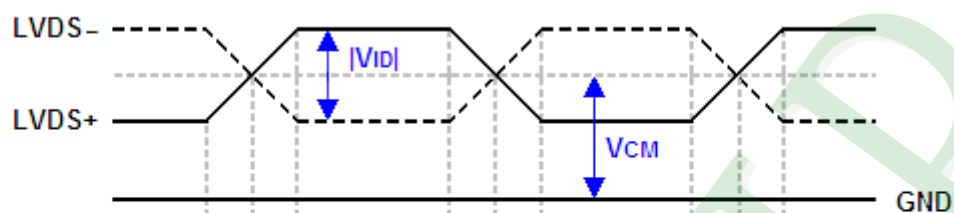

Differential Signal

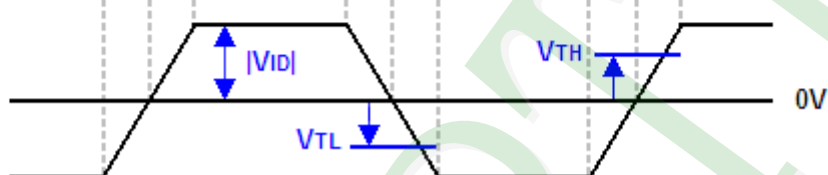

1.5 Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	-
Response time		T _r + T _f	-	-	15	25	ms	Note2
Viewing angle	Top	ΘY+	CR ≥ 10	-	89	-	Deg.	Note4
	Bottom	ΘY-		-	89	-		
	Left	ΘX-		-	89	-		
	Right	ΘX+		-	89	-		
Contrast ratio		CR	Ta = 25°C ΘX , ΘY = 0°	700	1000	-	-	Note3
Color of CIE Coordinate (With B/L and TP)	White	X		0.27	0.30	0.33	-	Note1
		Y		0.30	0.33	0.36		
	Red	X		0.62	0.65	0.68		
		Y		0.31	0.34	0.37		
	Green	X		0.29	0.32	0.35		
		Y		0.58	0.61	0.64		
	Blue	X		0.12	0.15	0.18		
		Y		0.02	0.05	0.08		
Average Brightness Pattern=white display (With TP)		IV		-	235	295	-	cd/m2
Uniformity (With TP) *2		ΔB	-	70	-	-	%	Note1

Note1:

$$1 : \Delta B = B(\min) / B(\max) \times 100\%$$


2 : Measurement Condition for Optical Characteristics:

a : Environment: $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ / $60 \pm 20\% \text{R.H}$, no wind , dark room below 10 Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: $500 \pm 50 \text{ mm}$, ($\theta = 0^{\circ}$)


c : Equipment: TOPCON BM-7 fast , (field 1°) , after 10 minutes operation.

d : The uncertainty of the C.I.E coordinate measurement ± 0.01 , Average Brightness $\pm 4\%$

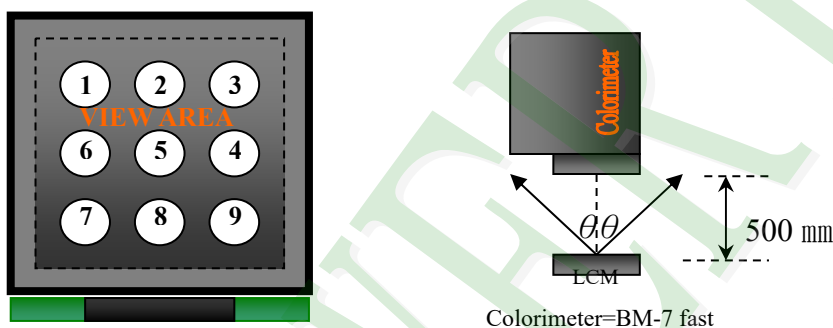

Note2: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "black" to "white" (falling time) and from "white" to "black" (rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes. Refer to figure as below:

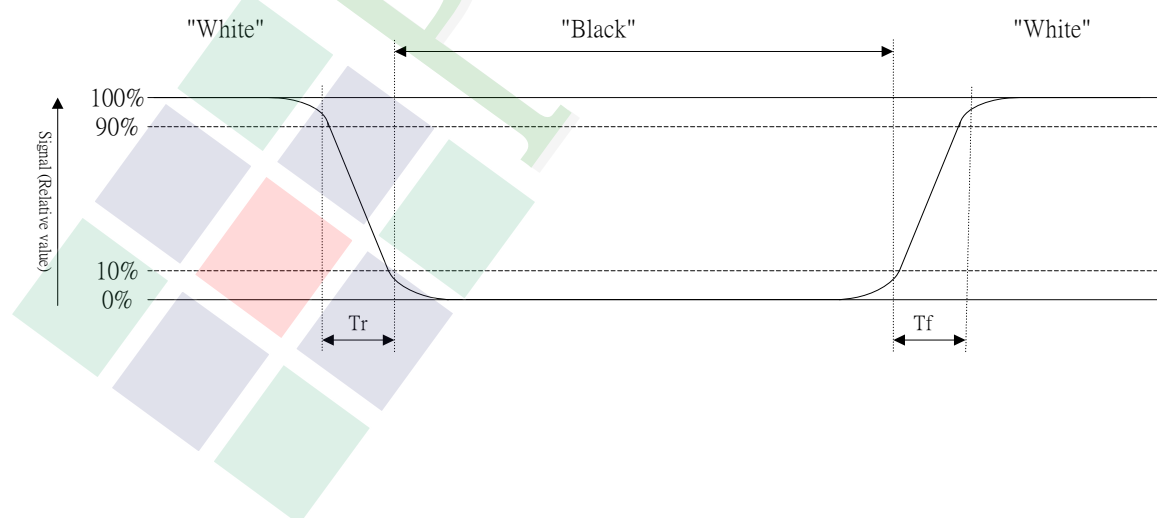


Note3: Definition of contrast ratio:

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note4: Definition of viewing angle:

Refer to figure as below:

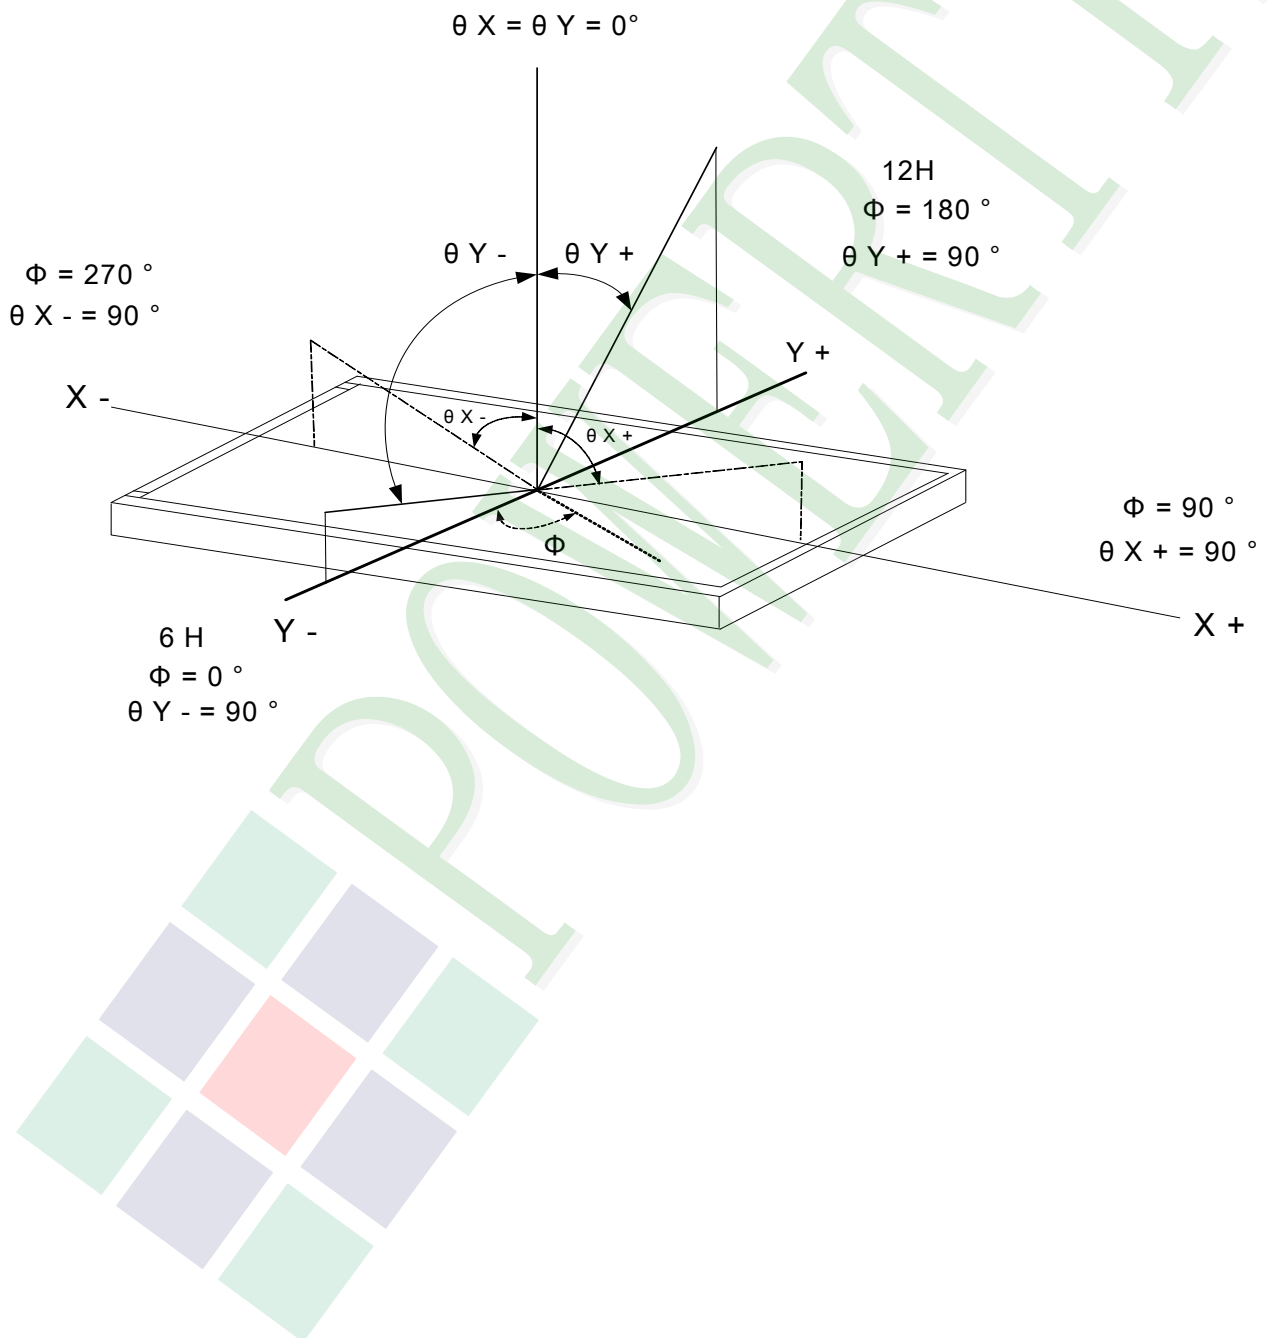

1.6 Backlight Characteristics

Absolute Maximum Ratings

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Pulse Forward Current Per Input Pin	I _P	-	-	500	mA	(1), (2) Pulse Width ≤ 10msec. And Duty ≤ 25%

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for input pin of LED light bar at Ta=25±2 °C

Electrical Characteristics

Item	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
LED Light Bar Input Voltage Per Input Pin	V _{LED}	44	50.4	59.4	V	I _{LED} =80mA
LED Light Bar Current Per Input Pin	I _{LED}	-	80	84	mA	-
LED Life Time	L _{LED}	30000	-	-	Hrs	-
Power Consumption	P _{BL}	-	16.128	19.008	W	I _{LED} =80mA

1.7 Touch Panel Characteristics

Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Supply voltage	VDD	-	-0.3	+6.0	V

Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply Voltage for USB	VBUS	-	-	5.0	-	V

Optical Characteristics

Item	Standard Value	Unit
Total light transmittance	85% or more	-
Hardness	≥7H	


2. MODULE STRUCTURE

2.1 Counter Drawing

LCM Mechanical Diagram

* See Appendix

Block Diagram

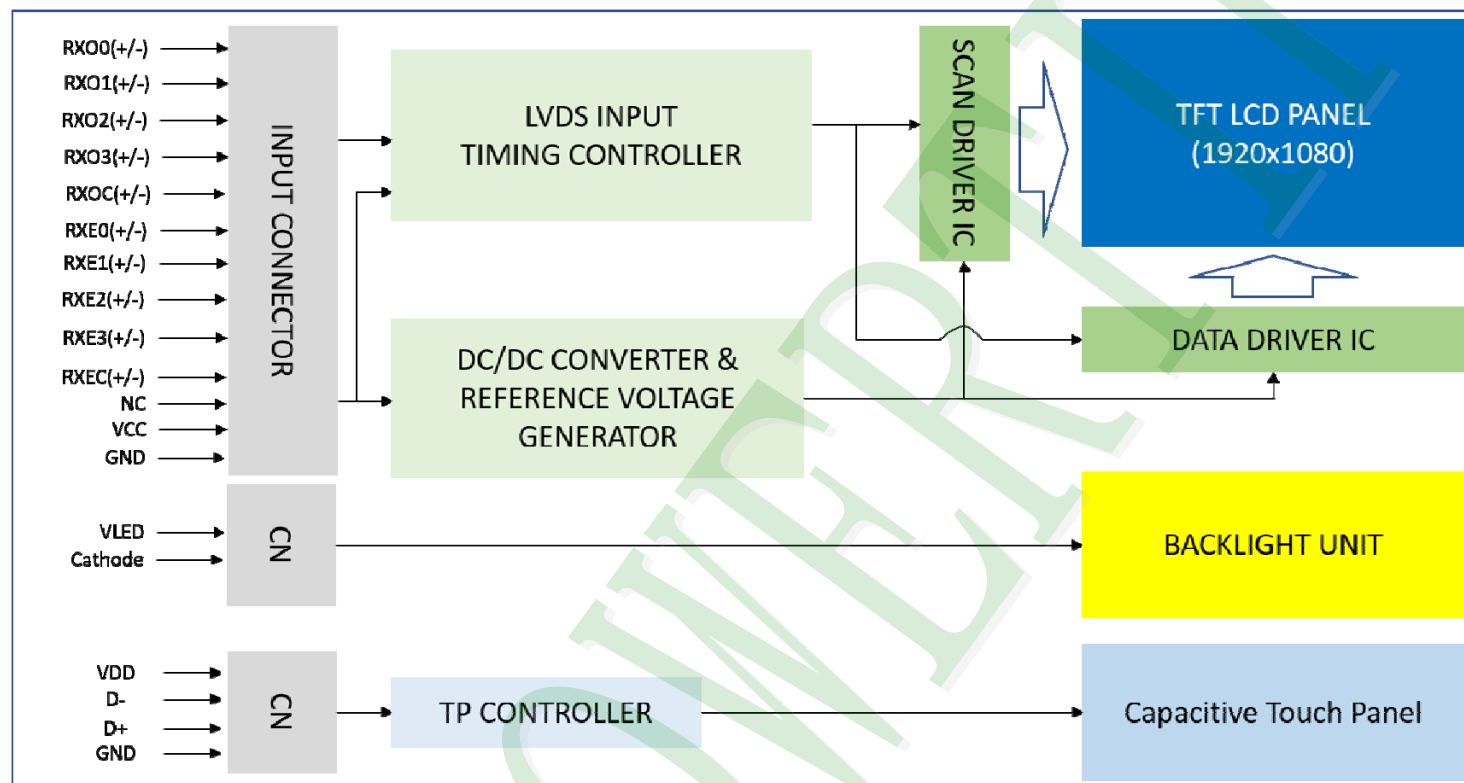

2.2 Interface Pin Description

● LCM

Pin No.	Symbol	Description	Note
1	RX00-	Negative LVDS differential data input. Channel O0 (odd)	-
2	RX00+	Positive LVDS differential data input. Channel O0 (odd)	-
3	RX01-	Negative LVDS differential data input. Channel O1 (odd)	-
4	RX01+	Positive LVDS differential data input. Channel O1 (odd)	-
5	RX02-	Negative LVDS differential data input. Channel O2 (odd)	-
6	RX02+	Positive LVDS differential data input. Channel O2 (odd)	-
7	GND	Ground	-
8	RXOC-	Negative LVDS differential clock input. (odd)	-
9	RXOC+	Positive LVDS differential clock input. (odd)	-
10	RX03-	Negative LVDS differential data input. Channel O3(odd)	-
11	RX03+	Positive LVDS differential data input. Channel O3 (odd)	-
12	RXE0-	Negative LVDS differential data input. Channel E0 (even)	-
13	RXE0+	Positive LVDS differential data input. Channel E0 (even)	-
14	GND	Ground	-
15	RXE1-	Negative LVDS differential data input. Channel E1(even)	-
16	RXE1+	Positive LVDS differential data input. Channel E1(even)	-
17	GND	Ground	-
18	RXE2-	Negative LVDS differential data input. Channel E2 (even)	-
19	RXE2+	Positive LVDS differential data input. Channel E2 (even)	-
20	RXEC-	Negative LVDS differential clock input. (even)	-
21	RXEC+	Positive LVDS differential clock input. (even)	-
22	RXE3-	Negative LVDS differential data input. Channel E3 (even)	-
23	RXE3+	Positive LVDS differential data input. Channel E3 (even)	-
24	GND	Ground	-
25	NC	For LCD internal use only. Do not connect	-
26	NC	For LCD internal use only. Do not connect	-
27	NC	For LCD internal use only. Do not connect	-
28	Vcc	+5.0V power supply	-
29	Vcc	+5.0V power supply	-
30	Vcc	+5.0V power supply	-

Note (1): Connector Part No.:

Foxconn; GS23301-0321R-7H

Or FCN: WF13-422-3033 or P-TWO: 187098-30091 or equivalent.


Note (2): User's connector Part No:

Mating Wire Cable Connector Part No.:FI-X30H(JAE) or FI-X30HL(JAE)

Mating FFC Cable Connector Part No.:217007-013001 (P-TWO) or JF05X030-1 (JAE).

Note (3): The first pixel is odd.

Note (4): Input signal of even and odd clock should be the same timing.

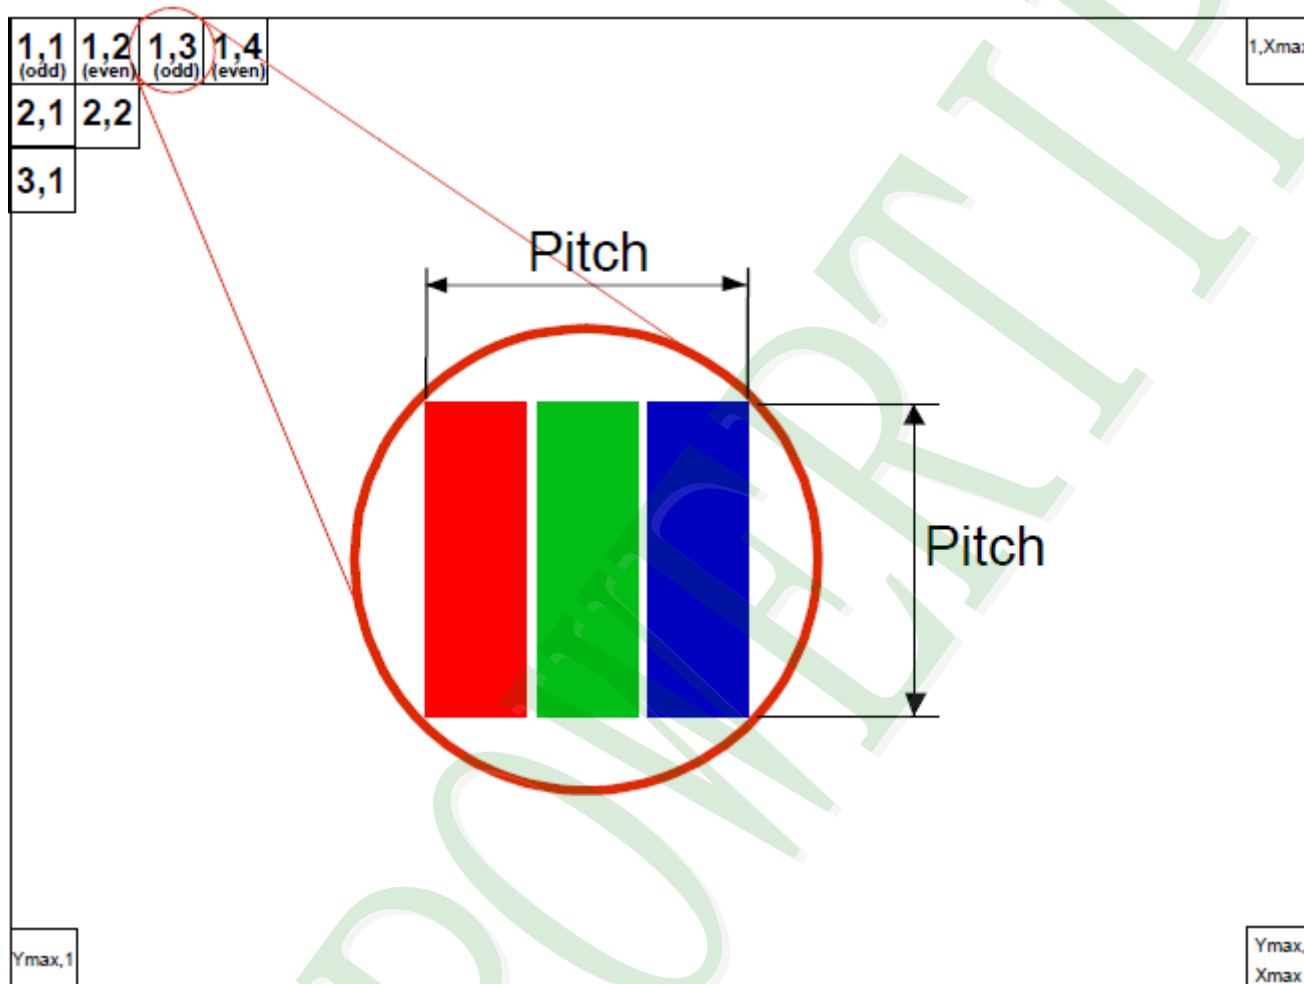

● CN1

Pin No.	Symbol	Description
1	Cathode	Cathode of LED string
2	Cathode	Cathode of LED string
3	VLED	Anode of LED string
4	VLED	Anode of LED string
5	Cathode	Cathode of LED string
6	Cathode	Cathode of LED string

Note (1) Connector (wire type): FCN(WM13-406-063N) or equivalent.


Note (2) User's mating connector part No.: FCN(WF1300106-B) and hook width must be less than 4.5mm.

- **Capacitive Touch Panel (CTP) Interface**

Pin No.	Symbol	Description
1	VDD	Power Supply. (+5.0V)
2	D-	D- Differential Data Input.
3	D+	D+ Differential Data Input.
5	GND	Ground.

2.3 Power Supply Characteristics

POWER ON/OFF SEQUENCE

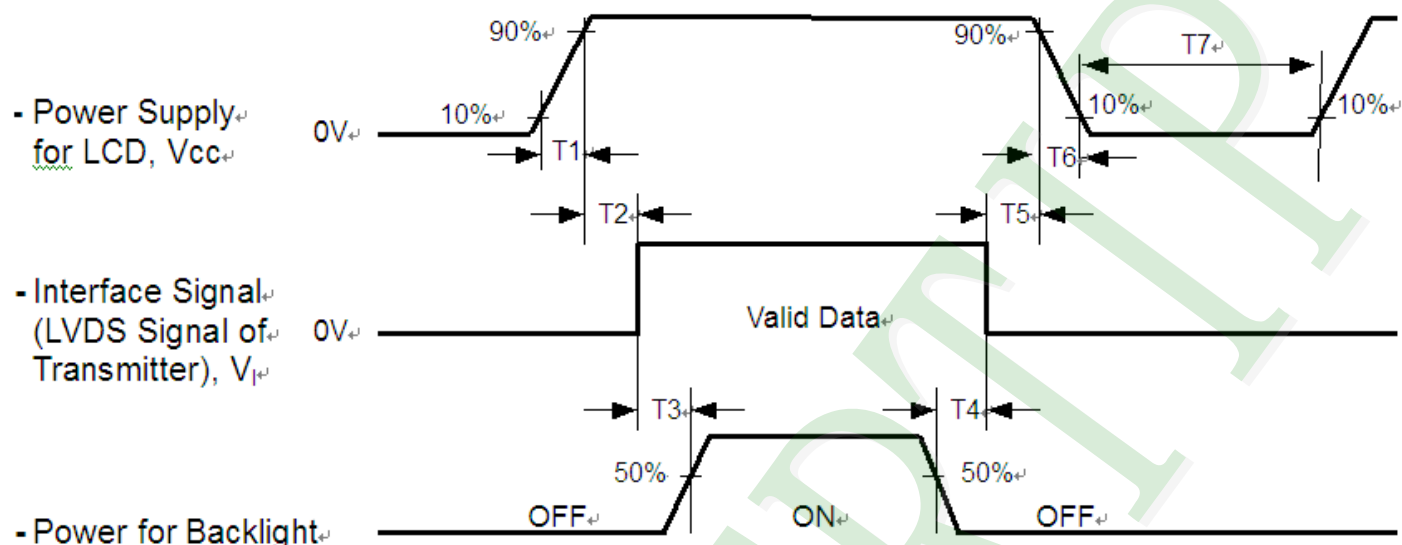

Timing Specifications:

Item	Min.	Typ.	Max.	Units
T1	0.5	-	10	ms
T2	0	30	50	ms
T3	450	-	-	ms
T4	100	250	-	ms
T5	0	20	50	ms
T6	0.1	-	100	ms
T7	1000	-	-	ms

Note (1) The supply voltage of the external system for the module input should be the same as the definition of V_{cc} .

Note (2) When the backlight turns on before the momentarily become abnormal screen.

Note (3) In case of $V_{CC} = \text{off level}$, please keep the level of input signals on the low or keep a high impedance.

Note (4) T7 should be measured after the module has been fully discharged between power of period.

Note (5) Interface signal shall not be kept at high impedance when the power is on.

Note (6) INX won't take any responsibility for the products which are following the Power Sequence.

Note (7) There might be slight electronic noise when LCD is turned off (even backlight unit is also off).

To avoid this symptom, we suggest "Vcc falling timing" to follow "t6 spec".

2.4 Timing Characteristics

LVDS DATA MAPPING TABLE

LVDS Channel O0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	OG0	OR5	OR4	OR3	OR2	OR1	OR0
LVDS Channel O1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	OB1	OB0	OG5	OG4	OG3	OG2	OG1
LVDS Channel O2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	OB5	OB4	OB3	OB2
LVDS Channel O3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	OB7	OB6	OG7	OG6	OR7	OR6
LVDS Channel E0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	EG0	ER5	ER4	ER3	ER2	ER1	ER0
LVDS Channel E1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	EB1	EB0	EG5	EG4	EG3	EG2	EG1
LVDS Channel E2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	EB5	EB4	EB3	EB2
LVDS Channel E3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	EB7	EB6	EG7	EG6	ER7	ER6

DISPLAY TIMING SPECIFICATIONS


Signal	Item	Symbol	Min.	Typ.	Max	Unit	Note
LVDS Clock	Frequency	F_c	58.54	74.25	97.98	MHz	-
	Period	T_c	-	13.47	-	ns	
	Input cycle to cycle jitter	T_{rcl}	$-0.02 * T_c$	-	$0.02 * T_c$	ns	(1)
	Input clock to data skew	TLVCCS	$-0.02 * T_c$	-	$0.02 * T_c$	ns	(2)
	Spread spectrum modulation range	F_{ckin_mod}	$0.97 * F_c$	-	$1.03 * F_c$	MHz	(3)
	Spread spectrum modulation frequency	F_{SSM}	-	-	100	KHz	
Vertical Display Term	Frame Rate	Fr	50	60	75	Hz	$T_v = T_{vd} + T_{vb}$
	Total	T_v	1115	1125	1136	Th	-
	Active Display	T_{vd}	1080	1080	1080	Th	-
	Blank	T_{vb}	35	45	56	Th	-
Horizontal Display Term	Total	T_h	1050	1100	1150	Tc	$T_h = T_{hd} + T_{hb}$
	Active Display	T_{hd}	960	960	960	Tc	-
	Blank	T_{hb}	90	140	190	Tc	-

Note: Because this module is operated by DE only mode, Hsync and Vsync input signals are ignored.


$$F_c = F_r * T_v * T_h$$

Please make sure the range of pixel clock has follow the below equation and F_c , F_r , T_v , T_h not allowed to get beyond the min and max spec.


INPUT SIGNAL TIMING DIAGRAM

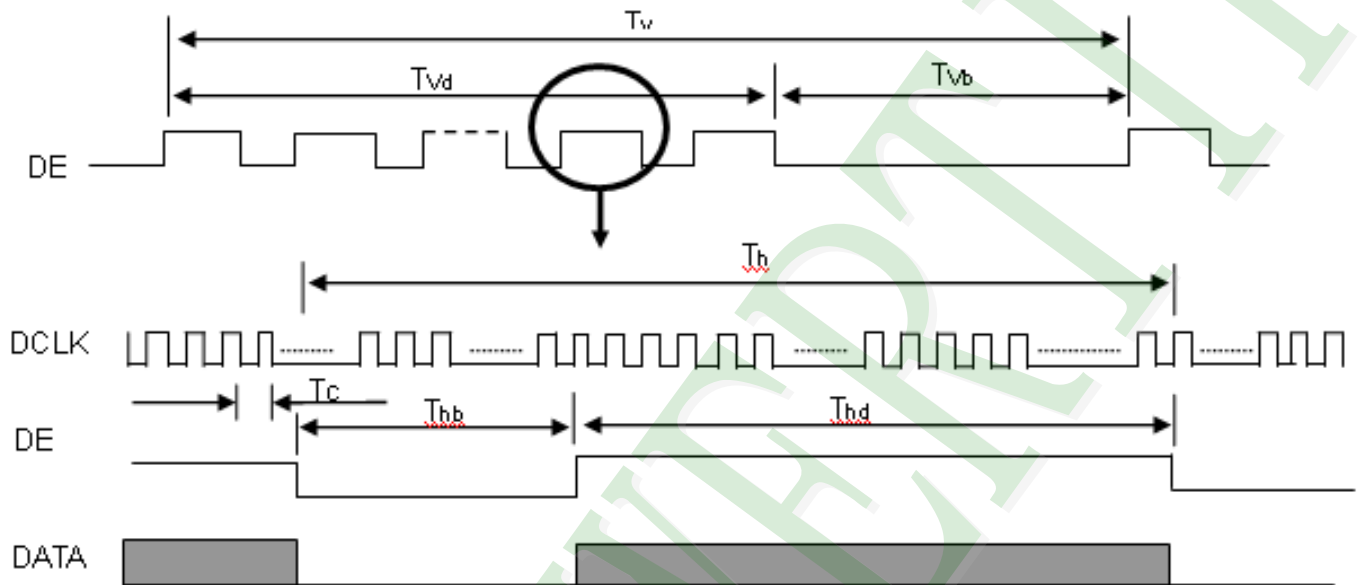


Note (1) The input clock cycle-to-cycle jitter is defined as below figures. $Trcl = |T_1 - T|$

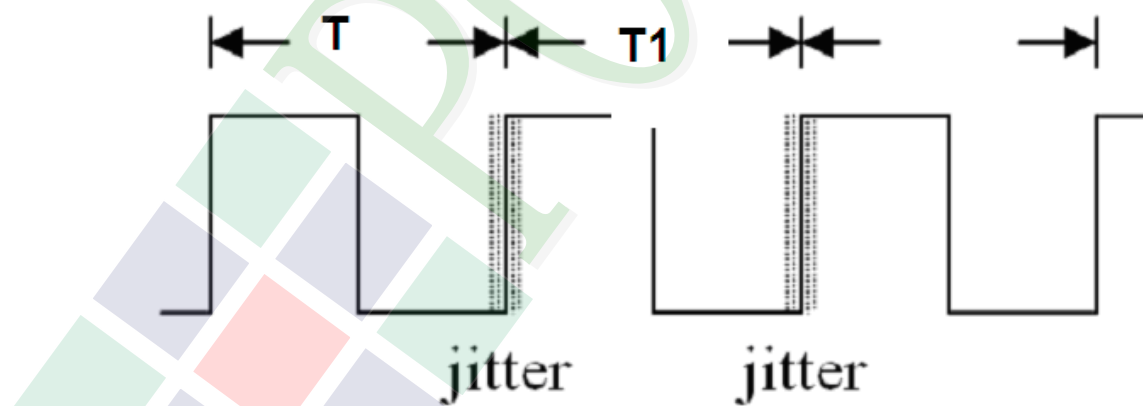

Note (2) Input Clock to data skew is defined as below figures.

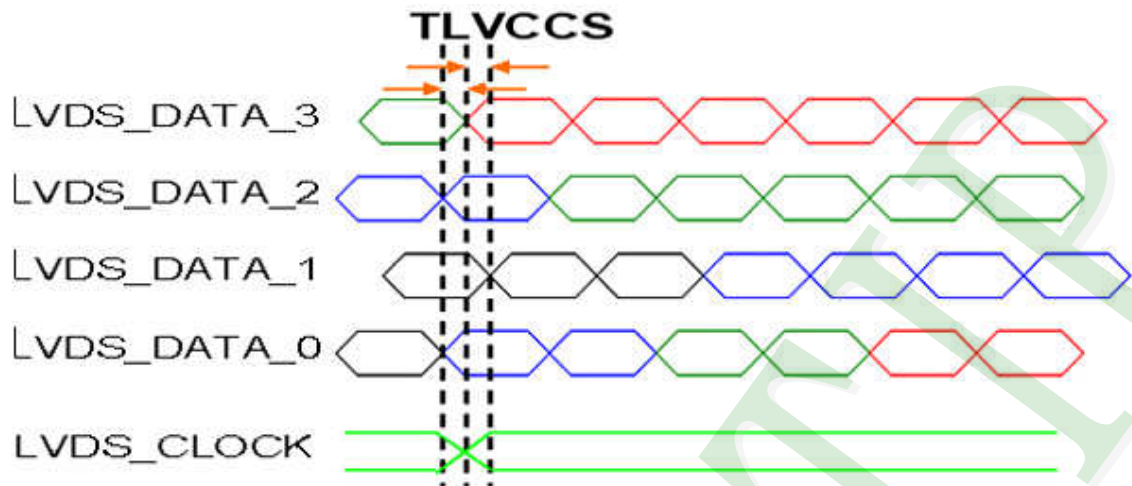


Note (3) The SSCG (Spread spectrum clock generator) is defined as below figures.

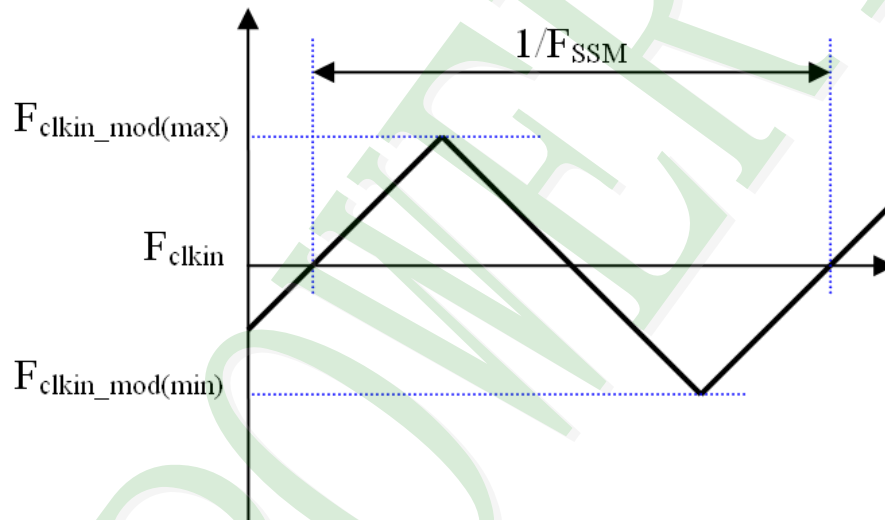


Note (4) The DCLK range at last line of V-blank should be set in 0 to Hdisplay/2

3. QUALITY ASSURANCE SYSTEM

3.1 Quality Assurance Flow Chart

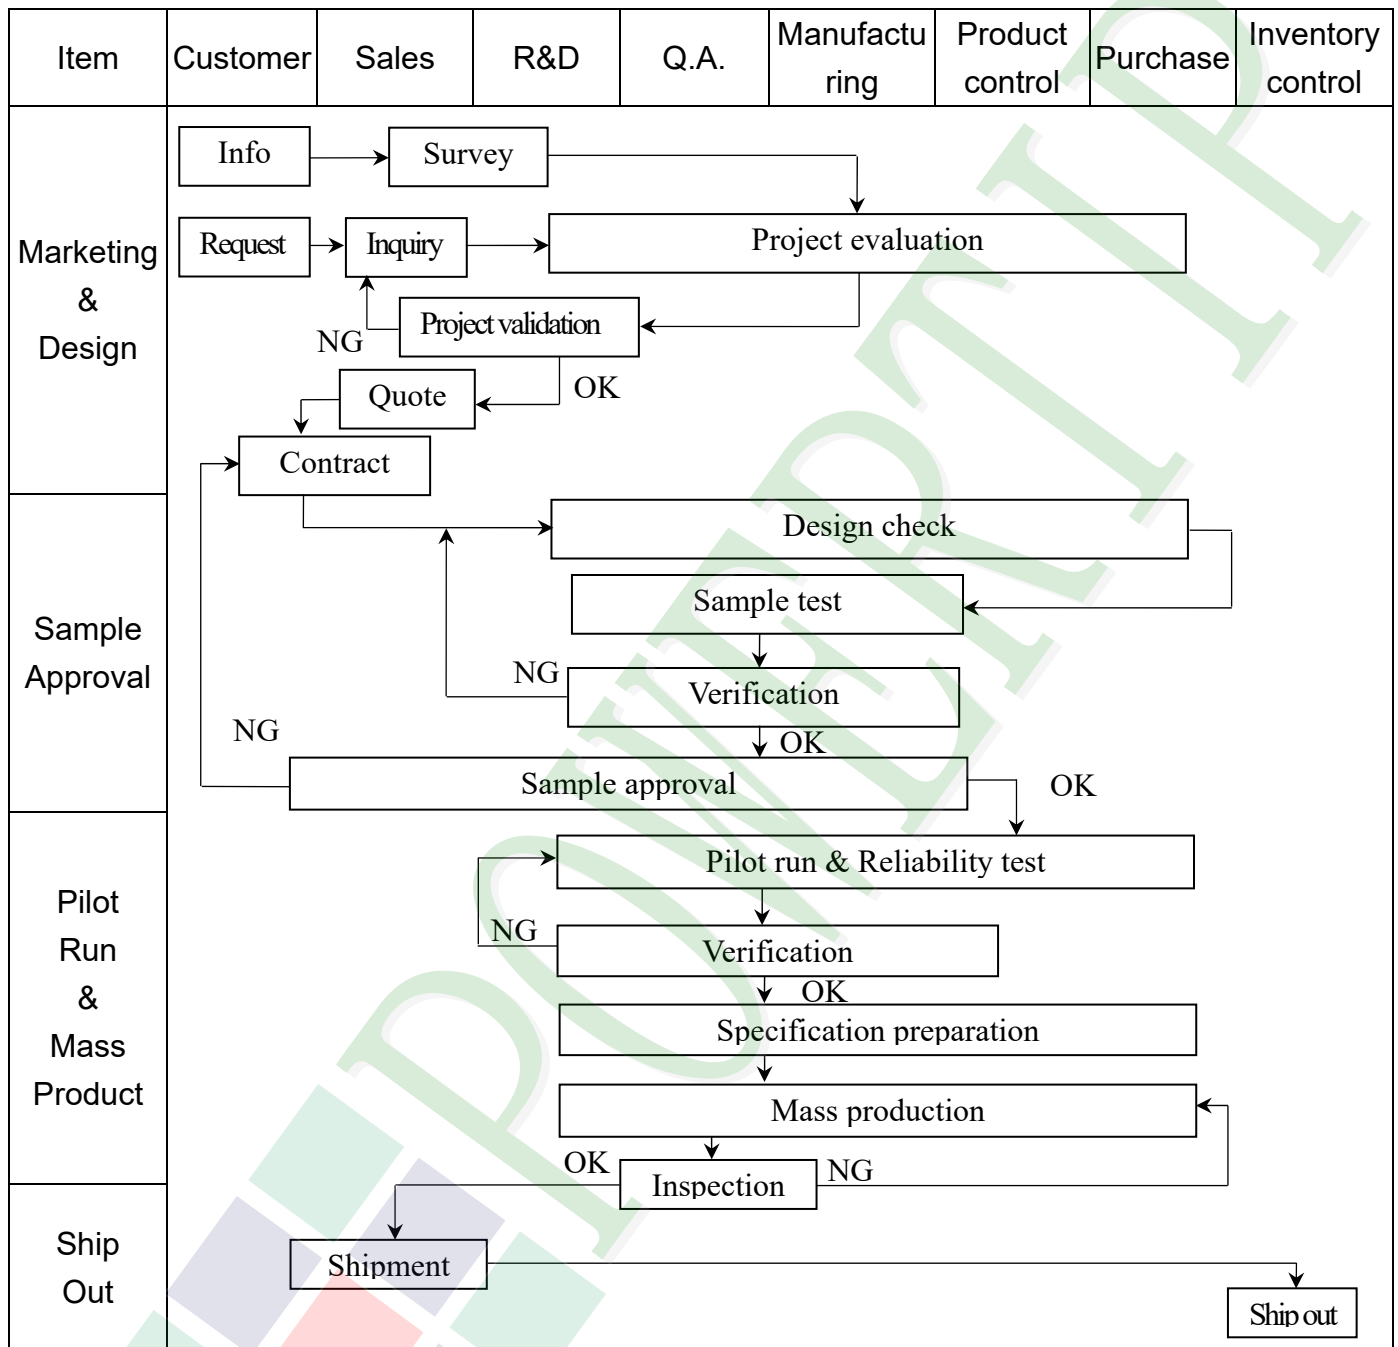

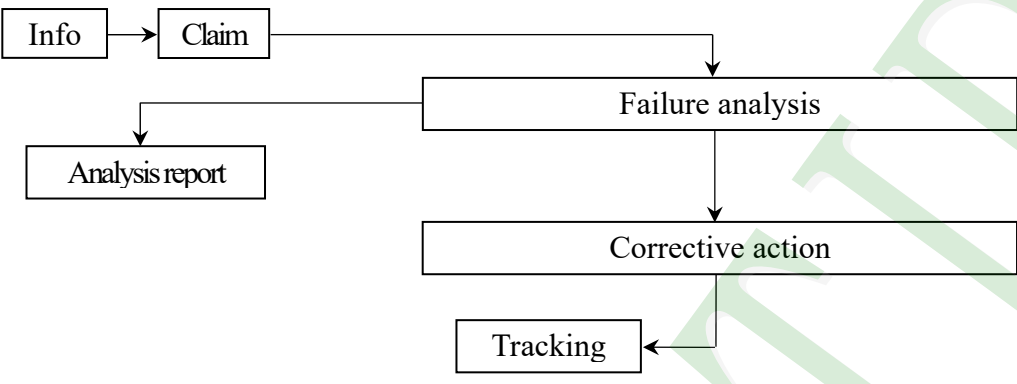
Item	Customer	Sales	R&D	Q.A.	Manufacturing	Product control	Purchase	Inventory control
Sales Service	 <pre> graph TD Info[Info] --> Claim[Claim] Claim --> Failure[Failure analysis] Failure --> Report[Analysis report] Failure --> Action[Corrective action] Action --> Tracking[Tracking] </pre>							
Q.A Activity	1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management				2. Process improvement proposal 4. Education and Training Activities			

3.2. Inspection Specification


- ◆Scope: The document shall be applied to TFT-LCD Module for 23.8" (Ver.B01).
- ◆Inspection Standard: MIL-STD-105E Table Normal Inspection Single Sampling Level II.
- ◆Equipment: Gauge, MIL-STD, Powertip Tester, Sample
- ◆Defect Level: Major Defect AQL: 0.4; Minor Defect AQL: 1.5
- ◆OUT Going Defect Level: Sampling.
- ◆Standard of the product appearance test:

a. Manner of appearance test:

- (1). The test best be under 20W×2 fluorescent light(about 300lux ~500lux), and distance of view must be at 35~40 cm.
- (2). The viewing angle :
 - * 15 degree to the front surface of display panel in vertical direction.
 - * 45 degree to the front surface of display panel in horizontal direction.

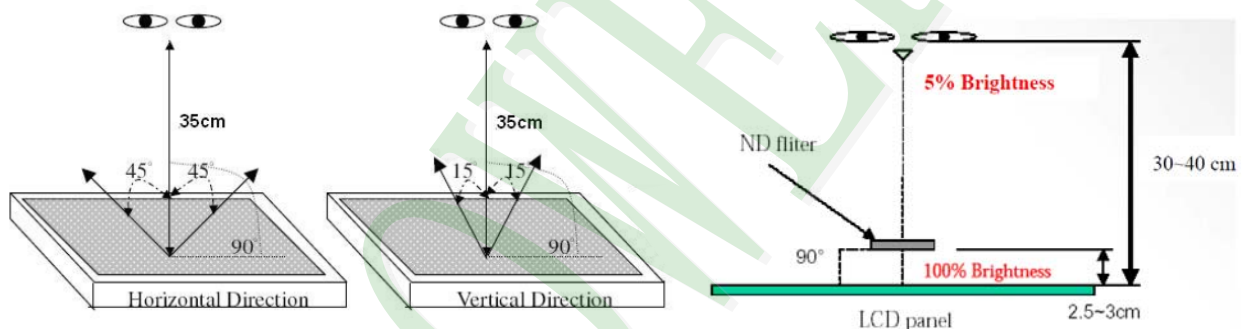

(3). Definition of area.


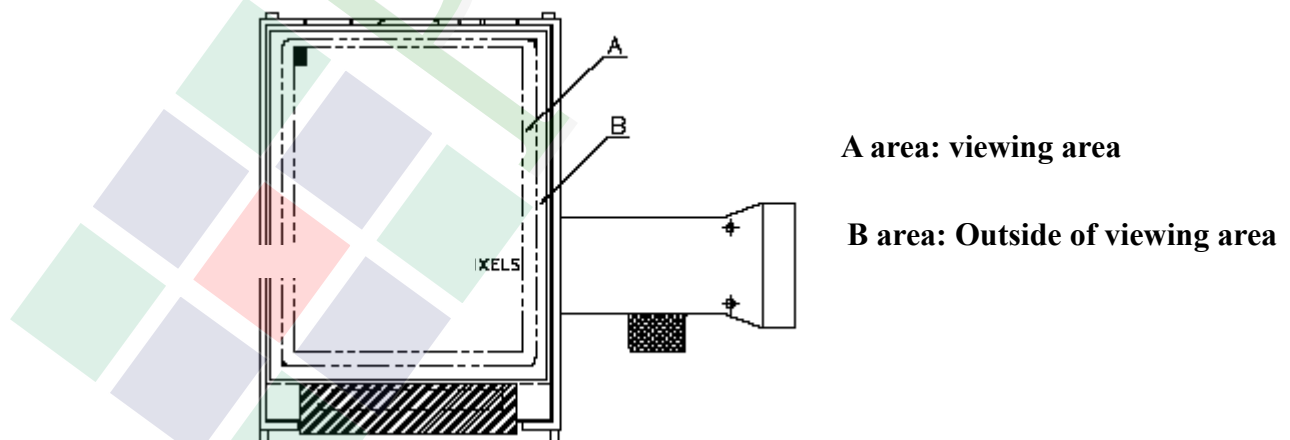


(4). Standard of inspection : (Unit : mm)

◆Specification For TFT-LCD Module 23.8" :
(Ver.B01)

NO	Item	Criterion	Level														
01	Product condition	1. 1The part number is inconsistent with work order of production.	Major														
		1. 2 Mixed product types.	Major														
		1. 3 Assembled in inverse direction.	Major														
02	Quantity	2. 1The quantity is inconsistent with work order of production.	Major														
03	Outline dimension	3. 1Product dimension and structure must conform to structure diagram.	Major														
04	Electrical Testing	4. 1 Missing line character and icon.	Major														
		4. 2 No function or no display.	Major														
		4. 3 Display malfunction.	Major														
		4. 4 LCD viewing angle defect.	Major														
		4. 5 Current consumption exceeds product specifications.	Major														
		4. 6Mura cannot be seen through 5% ND filter at 50% Gray , should be judged by the viewing angle of 90 degree.	Minor														
05	Dot defect (Bright dot, Dark dot) On -display	<table><tr><th colspan="2">Item</th><th>Acceptance (Q'ty)</th></tr><tr><td rowspan="5">Dot Defect</td><td>Bright Dot</td><td>≤ 4</td></tr><tr><td>Dark Dot</td><td>≤ 5</td></tr><tr><td>2 Dots Joint Dot</td><td>≤ 3</td></tr><tr><td>3 Dots Joint Dot</td><td>≤ 1</td></tr><tr><td>Total</td><td>≤ 7</td></tr></table>	Item		Acceptance (Q'ty)	Dot Defect	Bright Dot	≤ 4	Dark Dot	≤ 5	2 Dots Joint Dot	≤ 3	3 Dots Joint Dot	≤ 1	Total	≤ 7	Minor
		Item		Acceptance (Q'ty)													
Dot Defect	Bright Dot	≤ 4															
	Dark Dot	≤ 5															
	2 Dots Joint Dot	≤ 3															
	3 Dots Joint Dot	≤ 1															
	Total	≤ 7															
5. 1 Inspection pattern: full white, full black, Red, Green and blue screens. 5. 2 It is defined as dot defect if defect area >1/2 dot. 5. 3 The distance between two dot defect ≥5 mm. 5. 4 Bright dot : Dots appear bright and unchanged in visible with 5% ND filter is defined.																	

◆Specification For TFT-LCD Module 23.8" :
(Ver.B01)

NO	Item	Criterion	Level																																			
06	Black or white Dot, scratch, contamination Round type  $\Phi = (x + y) / 2$ Line type 	6. 1 Round type (Non-display or display): <table border="1"> <tr> <th rowspan="2">Dimension (diameter : Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> <tr> <td>$\Phi \leq 0.25$</td> <td>Ignore</td> <td rowspan="3">Ignore</td> </tr> <tr> <td>$0.25 < \Phi \leq 0.50$</td> <td>5</td> </tr> <tr> <td>$\Phi > 0.50$</td> <td>0</td> </tr> <tr> <td>Total</td> <td>5</td> <td></td> </tr> </table> 6. 2 Line type(Non-display or display): <table border="1"> <tr> <th rowspan="2">Length (L)</th> <th rowspan="2">Width (W)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> <tr> <td>---</td> <td>$W \leq 0.05$</td> <td>Ignore</td> <td rowspan="3">Ignore</td> </tr> <tr> <td>$0.05 < L \leq 10.0$</td> <td>$0.05 < W \leq 0.10$</td> <td>5</td> </tr> <tr> <td>---</td> <td>$W > 0.10$</td> <td>As round type</td> </tr> <tr> <td colspan="2">Total</td> <td>5</td> <td></td> </tr> </table>	Dimension (diameter : Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	5	$\Phi > 0.50$	0	Total	5		Length (L)	Width (W)	Acceptance (Q'ty)		A area	B area	---	$W \leq 0.05$	Ignore	Ignore	$0.05 < L \leq 10.0$	$0.05 < W \leq 0.10$	5	---	$W > 0.10$	As round type	Total		5		Minor
	Dimension (diameter : Φ)	Acceptance (Q'ty)																																				
A area		B area																																				
$\Phi \leq 0.25$	Ignore	Ignore																																				
$0.25 < \Phi \leq 0.50$	5																																					
$\Phi > 0.50$	0																																					
Total	5																																					
Length (L)	Width (W)	Acceptance (Q'ty)																																				
		A area	B area																																			
---	$W \leq 0.05$	Ignore	Ignore																																			
$0.05 < L \leq 10.0$	$0.05 < W \leq 0.10$	5																																				
---	$W > 0.10$	As round type																																				
Total		5																																				
07	Polarizer Bubble	<table border="1"> <tr> <th rowspan="2">Dimension (diameter: Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> <tr> <td>$\Phi \leq 0.25$</td> <td>Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$0.25 < \Phi \leq 0.50$</td> <td>4</td> </tr> <tr> <td>$0.50 < \Phi \leq 0.80$</td> <td>1</td> </tr> <tr> <td>$\Phi > 0.80$</td> <td>0</td> </tr> <tr> <td>Total</td> <td>5</td> <td></td> </tr> </table>	Dimension (diameter: Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	4	$0.50 < \Phi \leq 0.80$	1	$\Phi > 0.80$	0	Total	5		Minor																		
Dimension (diameter: Φ)	Acceptance (Q'ty)																																					
	A area	B area																																				
$\Phi \leq 0.25$	Ignore	Ignore																																				
$0.25 < \Phi \leq 0.50$	4																																					
$0.50 < \Phi \leq 0.80$	1																																					
$\Phi > 0.80$	0																																					
Total	5																																					

◆Specification For TFT-LCD Module 23. 8” :
(Ver.B01)

NO	Item	Criterion	Level
09	Backlight elements	9. 1 Backlight can't work normally.	Major
		9. 2 Backlight doesn't light or color is wrong.	Major
		9. 3 Illumination source flickers when lit.	Major
10	General appearance	10. 1 Pin type 、 quantity 、 dimension must match type in structure diagram.	Major
		10. 2 No short circuits in components on PCB or FPC.	Major
		10. 3 Parts on PCB or FPC must be: no wrong parts, missing parts or excess parts.	Major
		10. 4 Product packaging must the same as specified on packaging specification sheet.	Minor
		10. 5 The folding and peeled off in polarizer are not acceptable.	Minor
		10. 6 The PCB or FPC between B/L assembled distance(PCB or FPC) is ≤ 1.5 mm.	Minor

4. RELIABILITY TEST

4.1 Reliability Test Condition

NO.	TEST ITEM	TEST CONDITION	
1	High Temperature Operation Test	Keep in +50 $\pm 2^{\circ}\text{C}$ 240 hrs ,Display ON Surrounding temperature, then storage at normal condition 4hrs.	
2	Low Temperature Operation Test	Keep in 0 $\pm 2^{\circ}\text{C}$ 240 hrs ,Display ON Surrounding temperature, then storage at normal condition 4hrs.	
3	High Temperature Storage Test	Keep in +60 $\pm 2^{\circ}\text{C}$ 240 hrs Surrounding temperature, then storage at normal condition 4hrs.	
4	Low Temperature Storage Test	Keep in -20 $\pm 2^{\circ}\text{C}$ 240 hrs Surrounding temperature, then storage at normal condition 4hrs.	
5	High Temperature / High Humidity Storage Test	Keep in +50 $^{\circ}\text{C}$ / 80% R.H duration for 240 hrs Surrounding temperature, then storage at normal condition 4hrs. (Excluding the polarizer)	
6	Temperature Cycling Storage Test	$-20^{\circ}\text{C} \rightarrow +25^{\circ}\text{C} \rightarrow +60^{\circ}\text{C} \rightarrow +25^{\circ}\text{C}$ (30mins) (5mins) (30mins) (5mins) $\xleftarrow{\hspace{1.5cm}} \hspace{0.5cm} \xrightarrow{\hspace{1.5cm}}$ 20 Cycle Surrounding temperature, then storage at normal condition 4hrs.	
7	ESD Test	Air Discharge: Apply 2 KV with 5 times Discharge for each polarity +/-	Contact Discharge: Apply 250 V with 5 times discharge for each polarity +/-
		1. Temperature ambience : 15 $^{\circ}\text{C}$ ~ 35 $^{\circ}\text{C}$ 2. Humidity relative : 30% ~ 60% 3. Energy Storage Capacitance(Cs+Cd) : 150pF $\pm 10\%$ 4. Discharge Resistance(Rd) : 330 $\Omega \pm 10\%$ 5. Discharge, mode of operation: Single Discharge (time between successive discharges at least 1 sec) (Tolerance if the output voltage indication : $\pm 5\%$)	
8	Vibration Test (Packaged)	1. Sine wave 10~300 Hz frequency 2. The amplitude of vibration : 1.5 mm 3. Each direction (X、Y、Z) duration for 10min	

5. PRECAUTION RELATING PRODUCT HANDLING

5.1 SAFETY

- 5.1.1 If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module, be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So, please handle it very carefully, do not touch, push or rub the exposed polarizing with anything harder than an HB pencil lead (glass, tweezers, etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands, this will stain the display area.
- 5.2.7 Do not use ketonic solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is $320 \pm 10^{\circ}\text{C}$ and 3 ~ 5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM.
- 5.2.10 Caution! (LCM products with Capacitive Touch Panel)
Strong EMI-sources such as switch-mode power supplies (SPS) can lead to touch malfunction (e.g., ghost-touches). Therefore, the touch needs to be thoroughly tested inside the target application.
- 5.2.11 CAUTION: Continuously displaying same static image will result in high possibility of image sticking/image burn-in effect due to TFT panel characteristic.
- 5.2.12 Double-sided tape designed to be attached with the customer's mechanical device, please follow up the rules and regulations published by the original manufacturer of double-side tape for the attachment operation.

5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush, shake, or jolt the module.

5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment, fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.

