
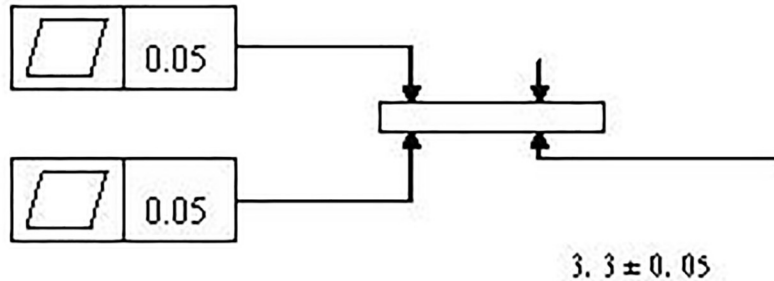


# stonecold

Item Number	PM-30X30-30
Wire	<ol style="list-style-type: none"> <li>20AWG UL 1674 PVC insulated</li> <li>Standard 105°C tinned copper wire</li> <li>General length: 150 ± 5mm</li> <li>Length of tinning without outer sphere on the end of wire: 5 ± 1.0mm</li> </ol>
Resistance (ohms)	2.95-3.15 ohms (surrounding temperature 20 °C, 1KHZ vacuum state)
Packing	Foambox
Printing	Printing on the hot side

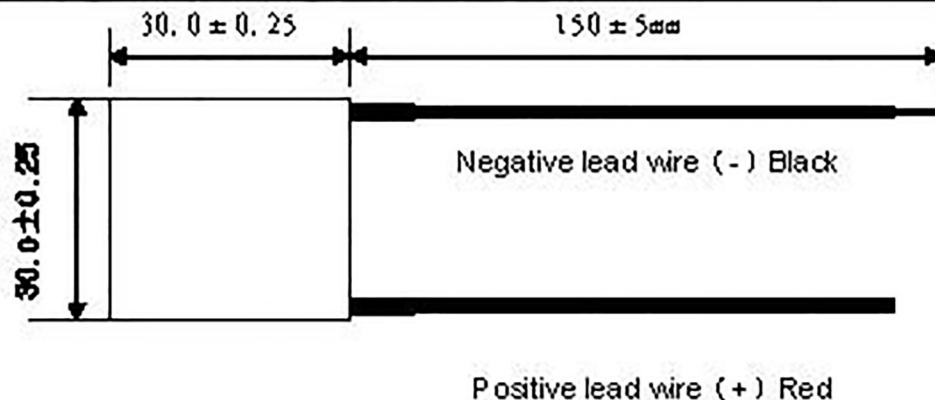

### Other Requirement:


- Working Temperature: -156°C to +80°C
- Assembled overwhelm force: 15 lb / Sq.In
- P/N Couples: 127 couples
- I<sub>max</sub>: 3.5A (15.4VDC)
- V<sub>max</sub>: 15.4VDC
- Q<sub>cmax</sub>: 27W (15.4 DVC)
- Resistance range: AC-R 2.95-3.15 Surrounding Temperature 20°C 1KHZ
- T<sub>max</sub> ≥ 63°C, T<sub>max</sub>-66°C (cooling capacity=0)
- Wire should be soldered on the hot side
- 20AWG UL, 1674 PVC insulated, Standard 105°C tinned copper wire
- Printing on the hot side

# stonecold


## PM-30X30-30

### Specifications


Vin — I — TC Graph Th=50°C

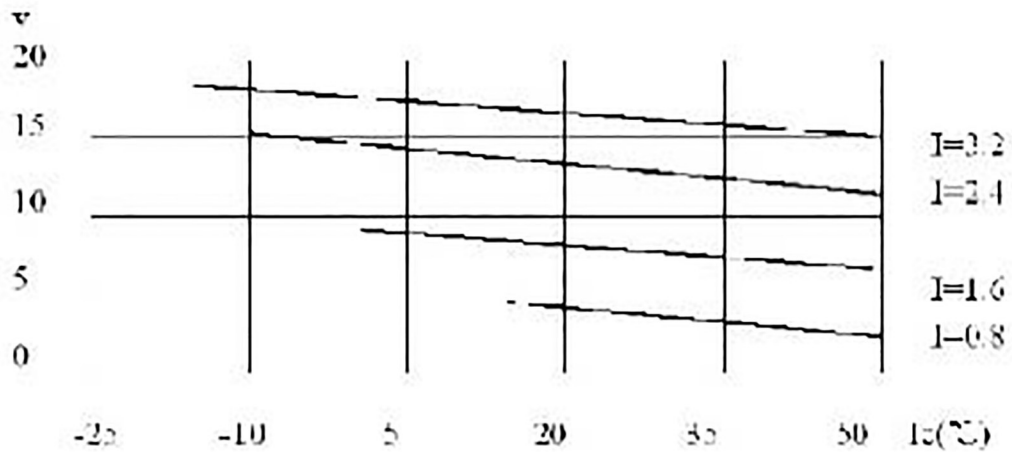

Qc — I — DT Graph Th=50°C

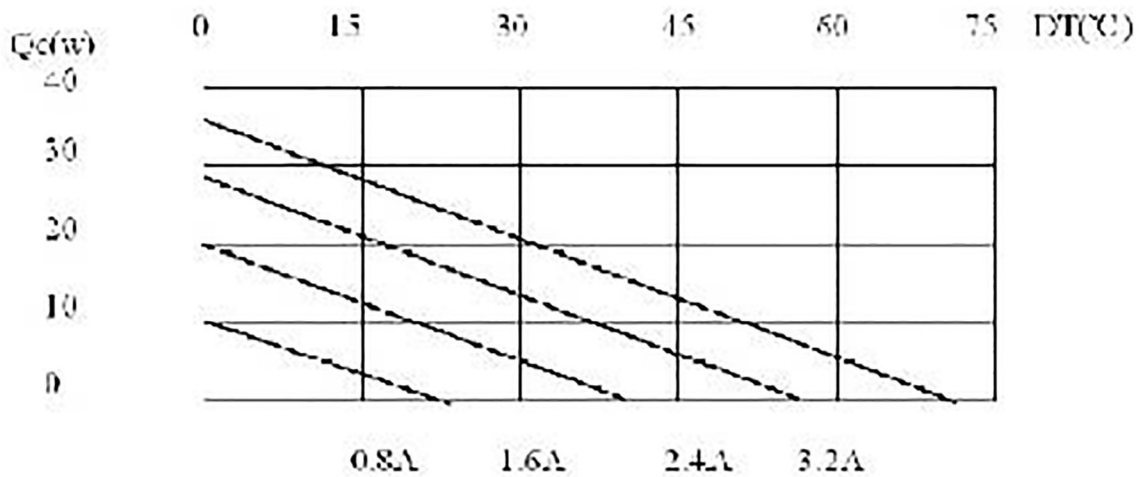

### Specifications

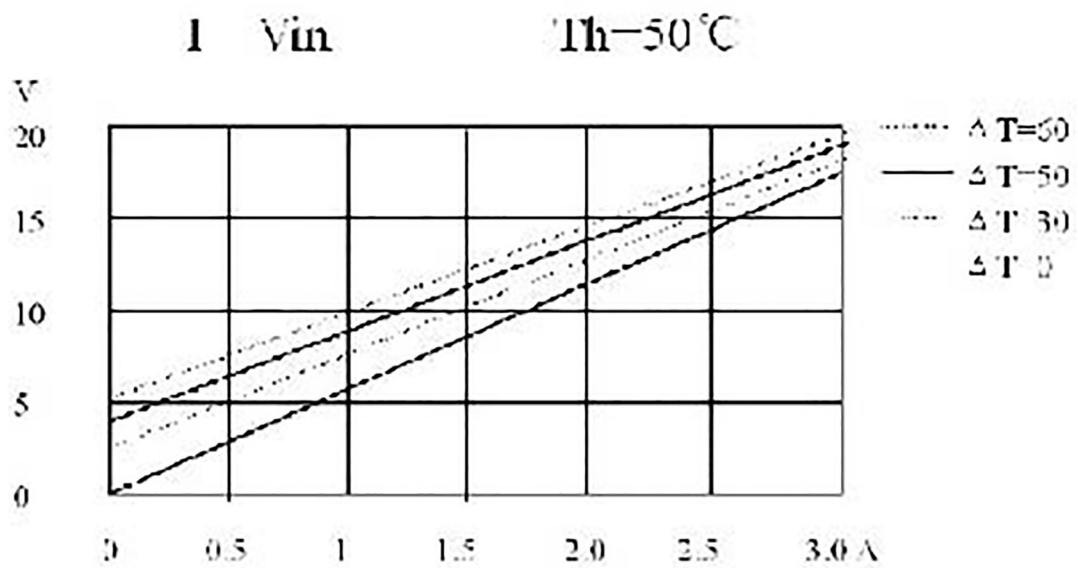

### Specifications

