
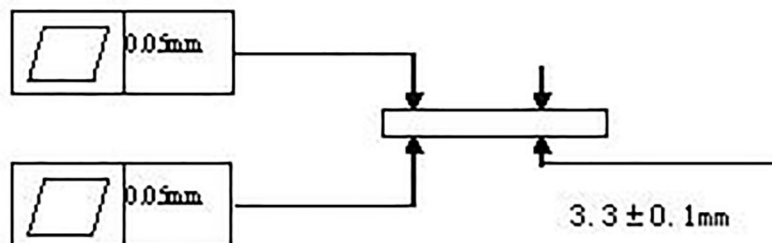


Specification



Item Number:	PM-40X40-45
Device Outline	See picture below
Heat-shrink tube on the end of wire	Not available
Wire Criteria	1. 20AWG UL, PVC insulated 2. Standard 105°C tinned copper wire 3. General length: 151±5mm 4. Length of tinning without outer sphere on the end of wire: 5±1.0mm
Resistance (ohms)	Environment Temperature 20°C, 1KHZ, 0.55-0.65 (ohms)
Packing	Foam box
Printing	See picture below

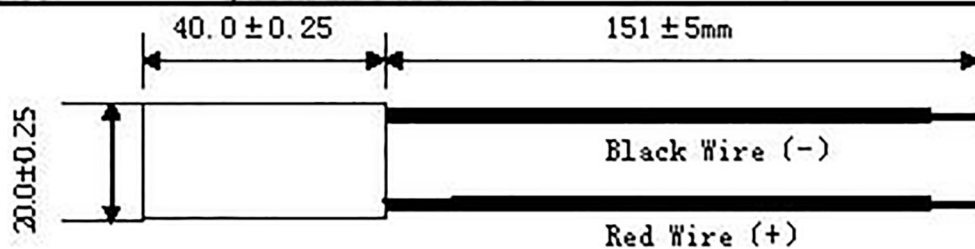

Other Requirement:

1. Working Temperature: -55°C to $+80^{\circ}\text{C}$
2. Assembled overwhelm force: 80lb/SqIn.
3. P/N Couples 63 couples
4. I_{max} 7.5±0.5A(6VDC)
5. V_{max} 7.5VDC
6. Q_{onax} 49W (7.5VDC)
7. Resistance range: AC-R 0.55-0.65 Ω (Surrounding Temperature 20°C 1KHZ)
8. ΔT_{max} : $\geq 63^{\circ}\text{C}$
9. Wire should be soldered on the hot side
10. 20AWG UL, PVC insulated, Standard 105°C tinned copper wire

Specification

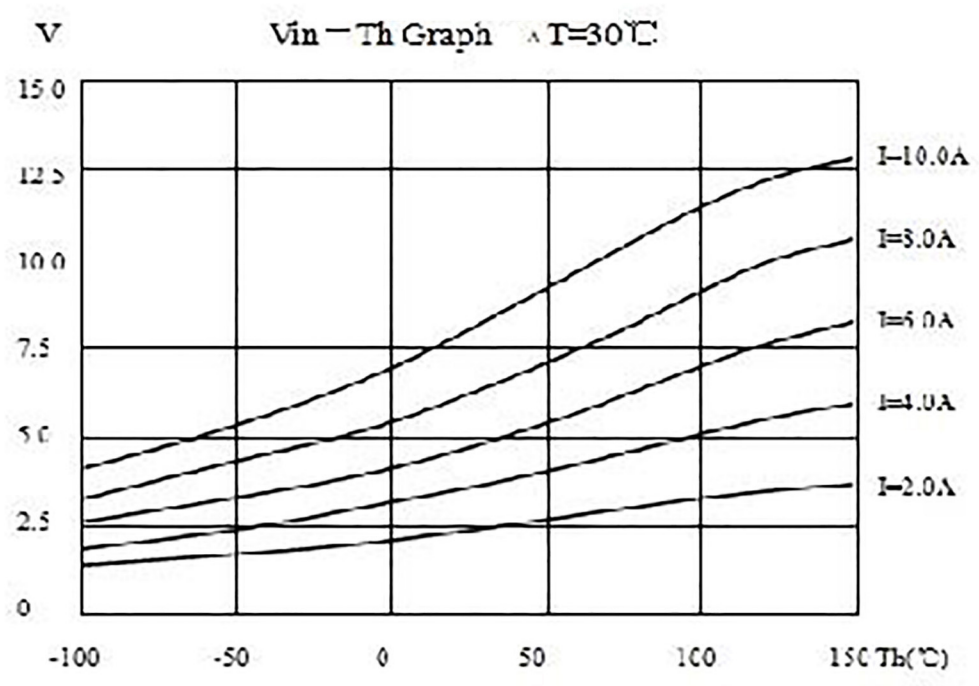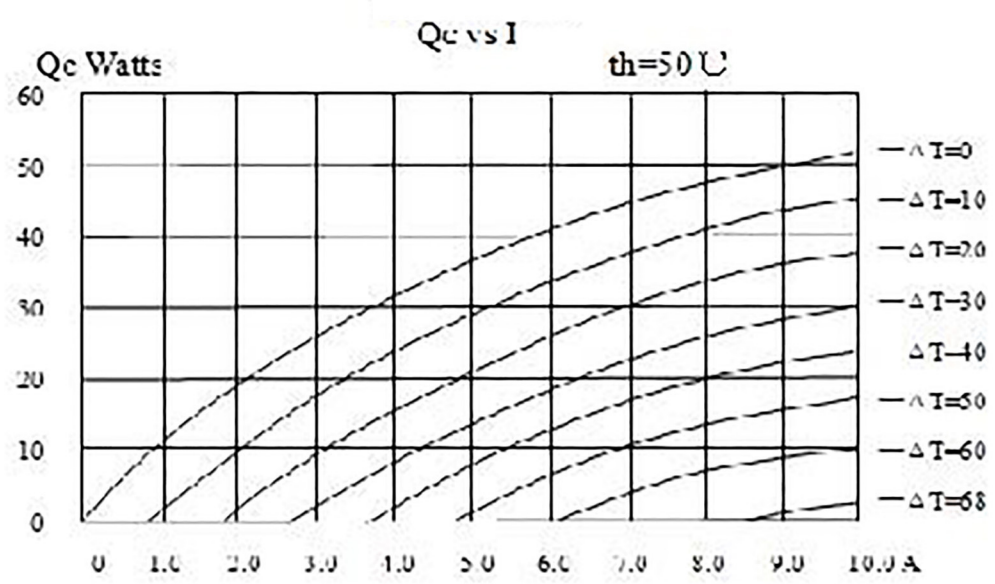

stonecold

PM-40X40-45

Specification

