


Specification

Item Number:	
Device Outline	See picture below
Heat-shrink tube on the end of wire	Not available
Wire Criteria	1. 20AWG UL, PVC insulated 2. Standard 105°C tinned copper wire 3. General length: 151±5mm 4. Length of tinning without outer sphere on the end of wire: 5±1.0mm
Resistance (ohms)	Environment Temperature 20°C, 1KHZ, 0.3-0.4 (ohms)
Packing	Foam box
Printing	See picture below


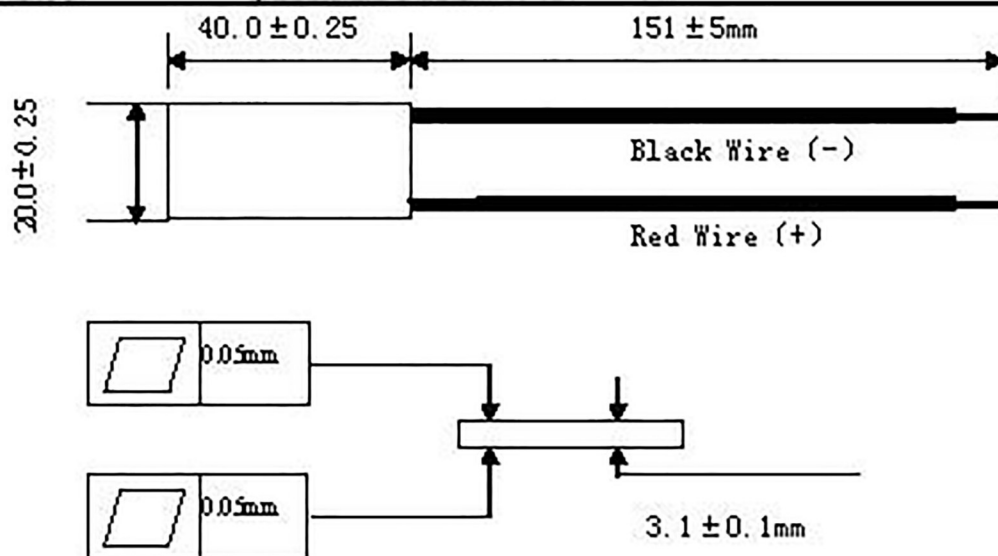


Other Requirement:

1. Working Temperature: -55°C to +80°C
2. Assembled overhelm force: 80lb/Sq.In.
3. P/N Couples 63 couples
4. I_{max} 12±0.5A (6VDC)
5. V_{max} 7.5VDC
6. Q_{max} 69W (7.5VDC)
7. Resistance range: AC-R 0.3-0.4 Ω (Surrounding Temperature 20°C 1KHZ)
8. ΔT_{max} ≥63°C
9. Wire should be soldered on the hot side
10. 20AWG UL, PVC insulated, Standard 105°C tinned copper wire

stonecold

PM-40X40-65

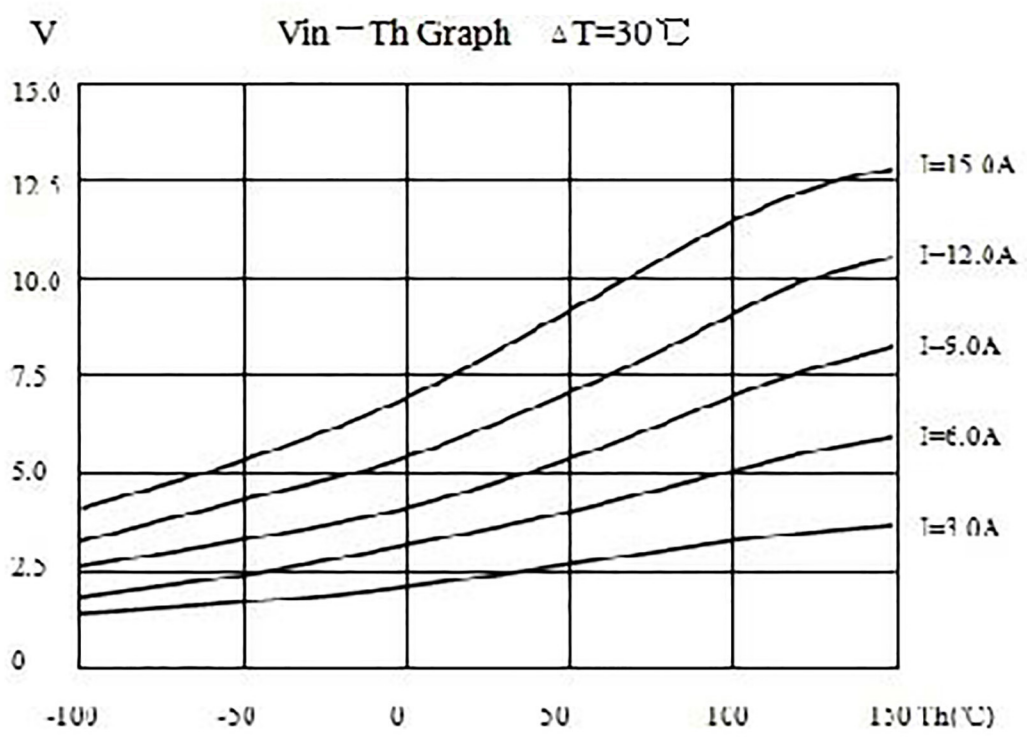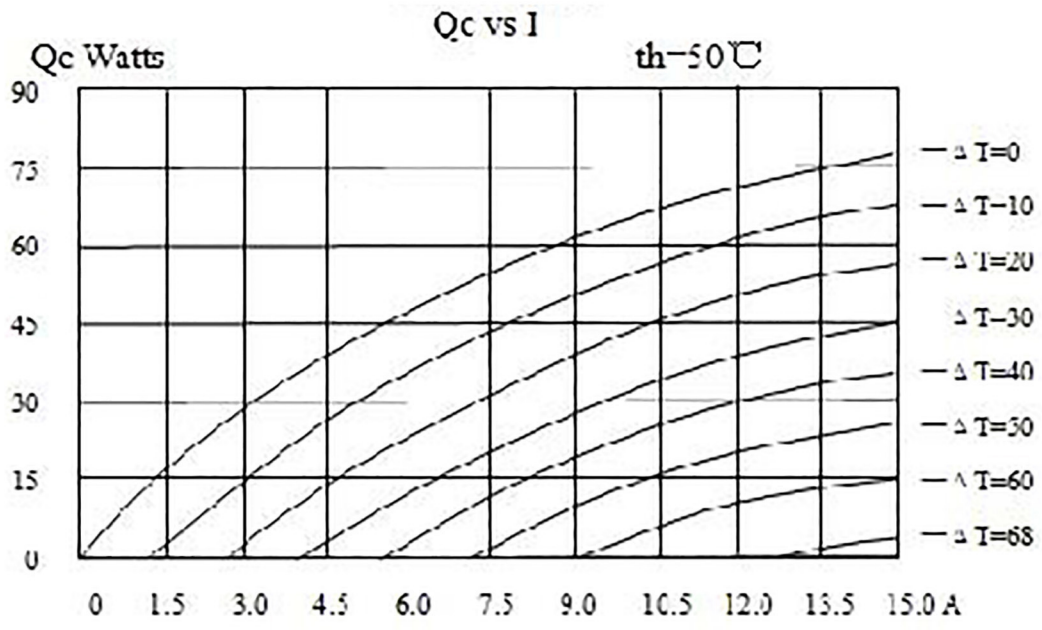

stonecold

PM-40X40-65

I Vin Graph $T_H=50^{\circ}\text{C}$

