






Rating	16A 12VDC 
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C
Switch Function	3P SPST ON-OFF (LED dependent)

Mounting Hole





Thickness	X	Y
0.75...1.5	19.4±0.1	13±0.1
1.5...2.5	19.8±0.1	13±0.1

Circuit Diagram

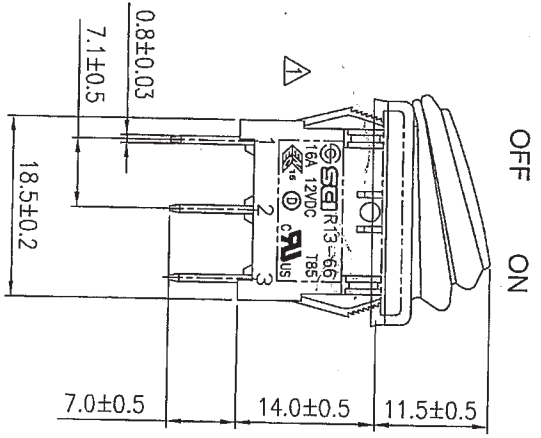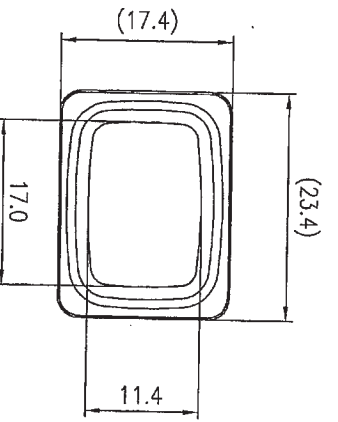

OFF ON

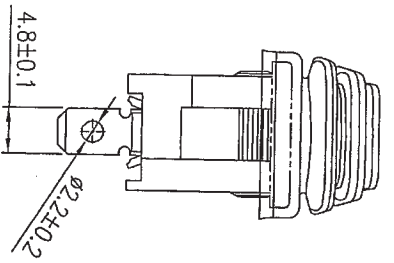


Material:
 Frame: Nylon 66 (94-V2)
 Actuator: PC (94-V2)
 Hot stamping: None
 Waterproof: IP65

原稿
 2016.6.08
 研發部

1824575	Black	Blue	Blue	Black
1824574	Black	Yellow	Yellow	Black
SCI No.	Frame	Actuator	LED	Waterproof Rubber

Tolerances ±0.3 Unless Otherwise Specified

5/7/16	周傑輝	DC 幾種使用DC本體更新刻字			
Date	Name	Description			NO
Drawn	Checked	Approved	SCI BOM No.	Model Name	ROCKER SWITCH
周傑輝		Simon	Customer No.	Model No.	R13-66B8-02
5/7/16	5/27/16	5/27/16	Unit	mm	Rev. 1
					Shin Chin Industrial Co., Ltd.