



|                       |                            |                                                                                    |                                                                                                         |
|-----------------------|----------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Rating                | 6A 125V AC, 3A 250VAC      | Mounting Hole                                                                      | Circuit Diagram                                                                                         |
| Contact Resistance    | 50m ohm Max.               |  | <br>N.C.<br>PUSH OFF |
| Insulation Resistance | DC 500V 100M ohm Min.      |                                                                                    |                                                                                                         |
| Dielectric Strength   | AC 1000V 1 minute          |                                                                                    |                                                                                                         |
| Operation Temperature | -20°C ~ 65°C               |                                                                                    |                                                                                                         |
| Switch Function       | 2P SPST ON-(OFF), PUSH OFF |                                                                                    |                                                                                                         |



**\*MATERIAL:**

Frame: Black, PF (94-V2)



Actuator: Ni-plated, Brass

Terminals: Silver plated, Copper alloy

**2 HEX NUT ASSY**

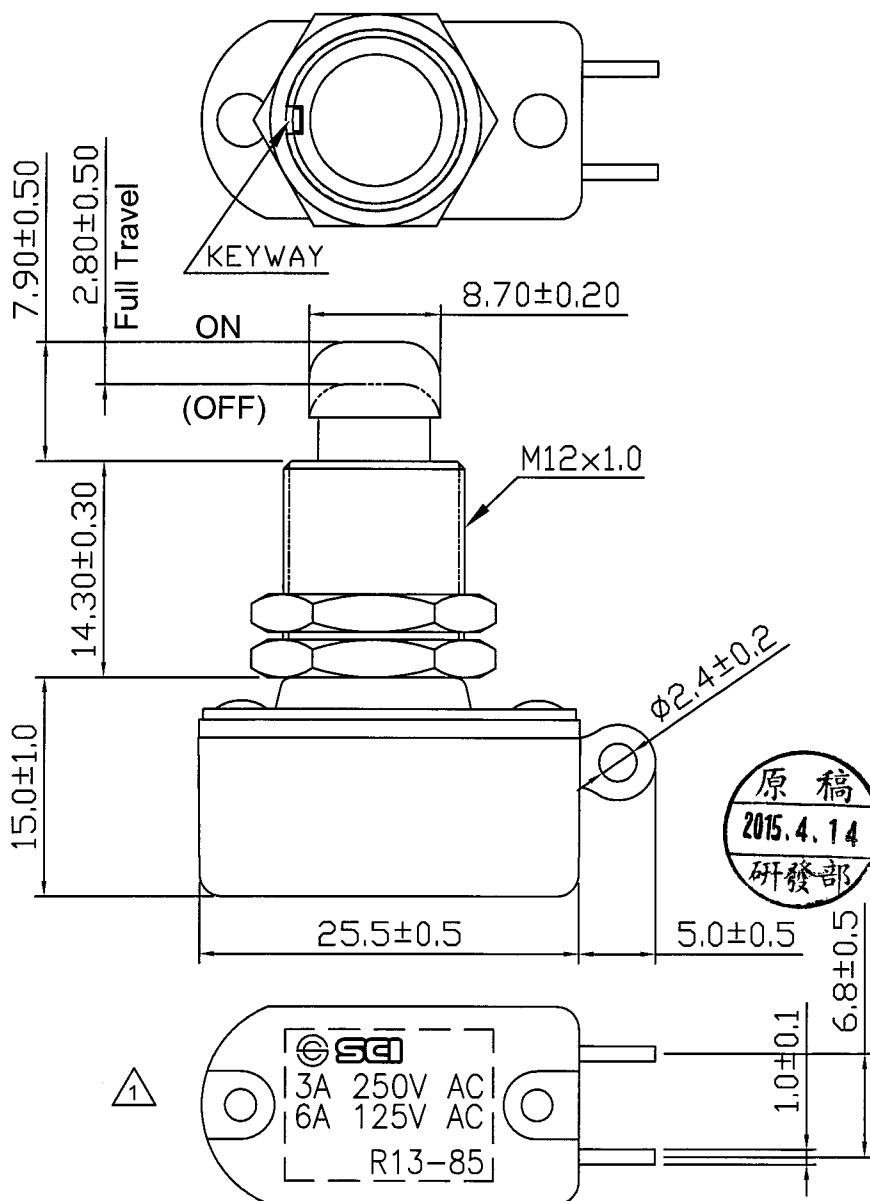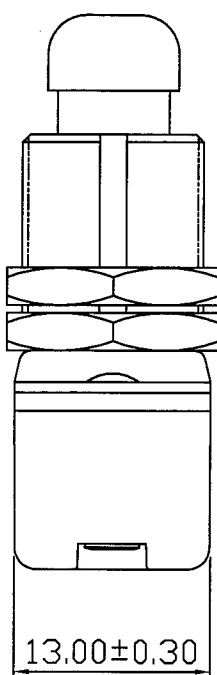

C8\R13\R13-85B1-05(1830668)

|          |         |                                                                                     |              |         |                                |                |
|----------|---------|-------------------------------------------------------------------------------------|--------------|---------|--------------------------------|----------------|
| 05/07/14 | 曹盈芳     | 依公司規定追加SCI Logo                                                                     |              |         |                                | △              |
| Date     | Name    | Description                                                                         |              |         |                                | NO             |
| Drawn    | Checked | Approved                                                                            | SCI BOM NO.  | 1830668 | Model Name                     | PUSH SWITCH    |
| 曹盈芳      |         |  | Customer No. |         | Model No.                      | R13-85B1-05-HH |
| 05/07/14 |         |  | Unit         | mm      | Shin Chin Industrial Co., Ltd. |                |
|          |         |                                                                                     |              |         |                                | Rev. 1         |