


## Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 1 of 10    |             | Date               | Jan. 29, 2018 |    |

### ● FUNCTIONS

1. 45° Tilt Detecting within a 360° radius
2. Up-Side Down Detecting

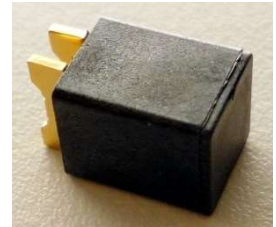

### ● APPLICATIONS

1. Automatically shut off for home appliances
2. Wake up systems for power saving, such like remote controllers
3. Anti-theft / Anti-tamper devices
4. Rotation Detection for monitor
5. Alarm system
6. Earthquake detecting
7. Automatically shut off for Sporting equipment
8. Entertainment device: video game consoles, toys



**Tilt Sensor Switch**

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 2 of 10    |             | Date               | Jan. 29, 2018 |    |

● **FEATURES**

1. Both suitable for horizontal and vertical PCB.
2. Switch state: Normal close.
3. RBS070500T are resistant to magnetization.
4. Housing made of high insulation plastic material, free from electric conduction and rust problem.
5. Gold-plated ball and terminals, low possibility of oxidization.
6. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
7. Simple ON and OFF signals, easy for design.
8. RoHS compliance, an ideal substitute for mercury switch.
9. A more economical tilt and rotation detection option than IC design solution.
10. All made in Taiwan and examined before shipment.

● **PATENTS**

1. Taiwan Patent No. M 437246
2. Taiwan Patent No. I 510356
3. Taiwan Patent No. I310951(RBS0705/0706)
4. U.S.A. Patent No. US 6,518,523 B1
5. U.S.A. Patent No. US 7,256,360 B1
6. U.S.A. Patent No. US 9,058,945 B2
7. U.S.A Patent No. US7,446,272 B2
8. China Patent No. 201220308500.8
9. China Patent No. 201220079187.5
10. China Patent No. 20120218323.9
11. China Patent No. 200610091095.8(RBS0705/0706)




Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 3 of 10    |             | Date               | Jan. 29, 2018 |    |

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.25mm)

Fig. 1

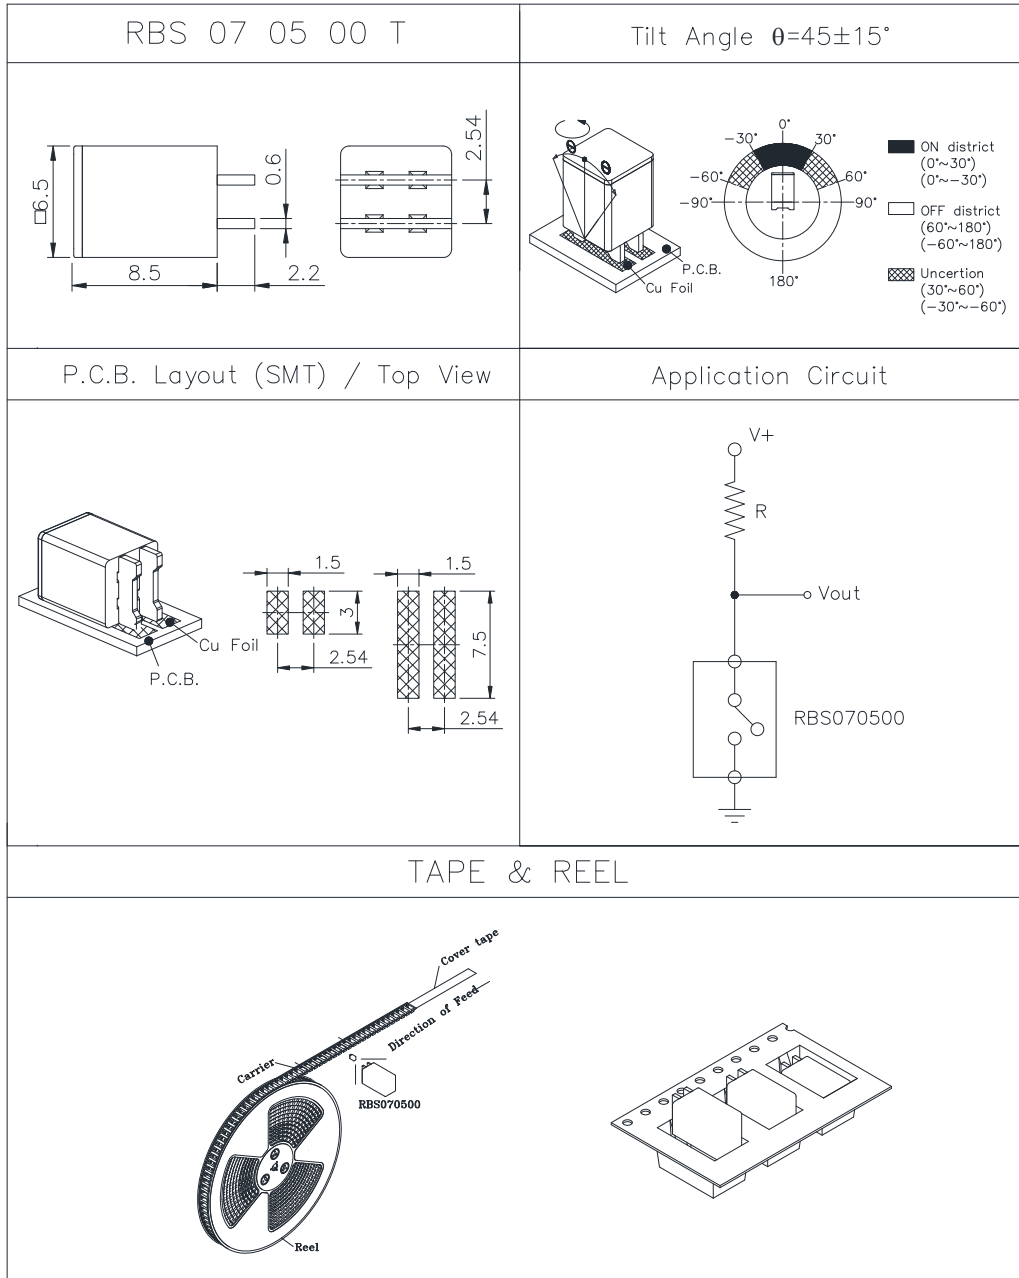

Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 4 of 10    |             | Date               | Jan. 29, 2018 |    |

● Current/Voltage Suggested

| Input Current (mA) | Operating Voltage (V) | Condition |
|--------------------|-----------------------|-----------|
| 1.0                | 5                     | --        |

● ELECTRICAL CHARACTERISTICS

|    |                       |                        |
|----|-----------------------|------------------------|
| 1. | Contact Rating        | 10 mA, 5VDC            |
| 2. | Contact Resistance    | 10 Ω max.              |
| 3. | Differential Angle    | Refer to Fig. 1        |
| 4. | Insulation Resistance | 1000 MΩ min., 100 VDC  |
| 5. | Dielectric Strength   | 500 VDC min., 1 minute |
| 6. | Capacitance           | 5 pF max.              |
| 7. | Conductive Rate       | 90% min.               |



Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 5 of 10    |             | Date               | Jan. 29, 2018 |    |

● RELIABLE TEST ITEMS

Reliable Test for RBS070500T

| Test Item             | Standard   | Contents                            |
|-----------------------|--|-------------------------------------|
| IR Reflow             | MIL-STD-202G,<br>TEST METHOD 210F、<br>IPC/JEDEC J-STD-020D | Peak temp.=255~260°C *3 times       |
| Operating Temperature | MIL-STD-202G,<br>TEST METHOD 107G,<br>TEST A               | -25°C ~85°C                         |
| Storage Temperature   | MIL-STD-202G,<br>TEST METHOD 107G,<br>TEST A               | -40°C ~85°C                         |
| Humidity              | MIL-STD-202G,<br>TEST METHOD 103B                          | 40°C /95%RH                         |
| Mechanical Life       | --   | 2 Hz, horizontal<br>1,000,000 times |
| Electrical Life       | --   | 100,000 times                       |



Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 6 of 10    |             | Date               | Jan. 29, 2018 |    |

● SOLDERING CONDITION

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

| Condition<br>Operation Method | Soldering Temperature   | Soldering Time   | Wattage of Manual Soldering                    | Suitable Production Process |
|-------------------------------|---|------------------|--|-----------------------------|
| IR Reflow                     | Please refer to following < Table of classification Reflow profile > and Fig. 2 |                  | -  | SMT                         |
| Manual Soldering              | 300±5°C   | < 3 seconds max. | 30W or Temperature-controlled manual soldering | SMT                         |



Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 7 of 10    |             | Date               | Jan. 29, 2018 |    |

< Table of classification Reflow profile >


| Item  | Pb process                         | Pb free process                    |
|---|------------------------------------|------------------------------------|
| Pre-heat and Soak<br>Temperature min.(T <sub>min</sub> )<br>Temperature max.(T <sub>max</sub> )<br>Time (T <sub>min</sub> to T <sub>max</sub> )(t <sub>s</sub> )  | 100 °C<br>150 °C<br>60-120 seconds | 150 °C<br>200 °C<br>60-120 seconds |
| Average Rate of temperature rising up<br>(T <sub>max</sub> to T <sub>p</sub> )  | 3 °C/second max.                   | 3 °C/second max.                   |
| Liquidous Temperature (TL)<br>Time at Liquidous (tL)  | 183 °C<br>60-150 seconds           | 217 °C<br>60-150 seconds           |
| Peak package body Temperature<br>(T <sub>p</sub> )*   | 230 °C ~235 °C *                   | 255 °C ~260 °C *                   |
| Classification temperature(T <sub>c</sub> )   | 235 °C                             | 260 °C                             |
| Time(tp)** within 5 °C of the<br>specified classification temperature<br>(T <sub>c</sub> )  | 20** seconds                       | 30** seconds                       |
| Average ram-down Rate<br>(T <sub>p</sub> to T <sub>max</sub> )  | 6 °C/second max.                   | 6 °C/second max.                   |
| Time 25 °C to peak temperature  | 6 minutes max.                     | 8 minutes max.                     |
| <p>* Tolerance for peak profile temperature (T<sub>p</sub>) is defined as a supplier minimum and a user maximum.<br/>                     ** Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum.</p> |                                    |                                    |



Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 8 of 10    |             | Date               | Jan. 29, 2018 |    |

Fig. 2

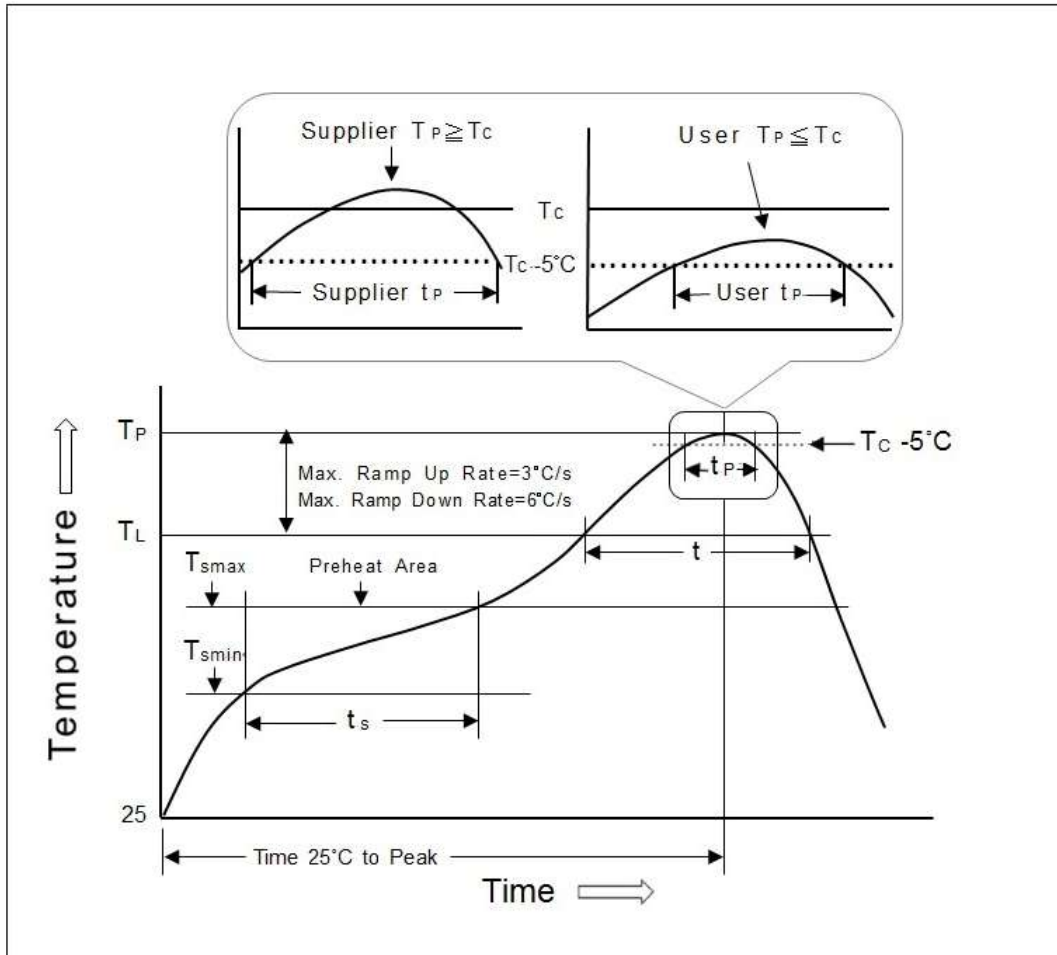



**Tilt Sensor Switch**

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 9 of 10    |             | Date               | Jan. 29, 2018 |    |

● PACKAGE

|    | Part Number | Package   | Quantity  | Total      | Dimension(mm)  |
|----|-------------|-----------|-----------|------------|----------------|
| 1. | RBS070500   | PE Bag    | 500 pcs   | 500 pcs    | 205L*145W      |
|    |             | Inner Box | 8 PE Bags | 4,000 pcs  | 348L*191W*85H  |
|    |             | Carton    | 3 Boxes   | 12,000 pcs | 364L*278W*213H |

※ Package shown as below for reference.



|    | Part Number | Package     | Quantity | Total      | Dimension(mm)  |
|----|-------------|-------------|----------|------------|----------------|
| 2. | RBS070500T  | Tape & reel | 800 pcs  | 800 pcs    | φ330*25H       |
|    |             | Inner box   | 2 Reels  | 1,600 pcs  | 355L*340W*68H  |
|    |             | Carton      | 10 boxes | 16,000 pcs | 703L*364W*380H |

※ Package shown as below for reference.



### Tilt Sensor Switch

|          |            |             |                    |               |    |
|----------|------------|-------------|--------------------|---------------|----|
| Item No. | RBS070500T | Description | Tilt Sensor Switch | Version       | 15 |
| Page     | 10 of 10   |             | Date               | Jan. 29, 2018 |    |

● NOTE

1. Suggestion for usage: For vibration usage or application, we suggest to add hysteresis for IC; if vibration is heavy, optical type of sensor switch is recommended.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.
3. If buyer's products will stay in power supply for a long time which needs very high stability, optical sensor switch is strongly recommended.

● PRECAUTIONS FOR USE

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Do not try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. If soldering temperature exceeds our specification, sensor switch could get apart.
5. Do not use switch in the environment of high humidity, because such an environment may cause the leakage current between the terminals.
6. Please do not exceed the rated load as there will be a risk of disabling the product function.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).

