


High-volume crimping.



Model CM 25-1 – crimping machine for universal use with guards

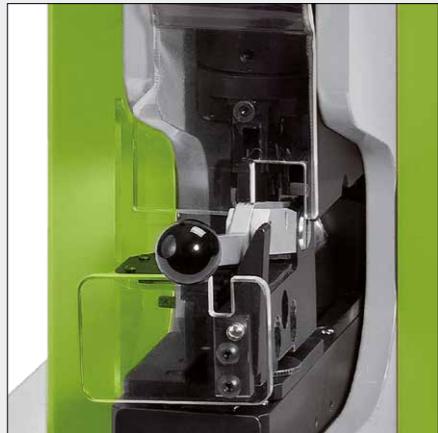

Model CM 25-5 – crimping machine with sliding table



Model CM 25-6 – crimping machine with reduced stroke, without guards

Pneumatic Crimping Machines CM 25

- Compatible with most crimp dies and positioning guides for the PEW 12 crimp system tool
- Compact, maintenance-free table-top device in various models for a wide range of manufacturing requirements
- Quick and simple retooling makes it suitable for short- and medium-run production
- 360° rotating mount for crimp inserts (not applicable to CM25-5)
- Fine adjustment of crimp height possible with setting nut on press ram
- Hand or foot actuation
- Crimping force 25 kN
- Height-adjustable feet
- Special models, e.g. with larger system dimensions (16 mm) can be found in the 'Special solutions and accessories' section



| Art. No. | EAN 4049002 | Description | Capacity mm ² | ↔ mm | Δ g |
|--------------|-------------|--|--------------------------|-------------|--------|
| 636 025-1 | 034305 | Crimping machine CM 25-1 without crimp dies, without positioning guides | | 325x280x500 | 33,500 |
| 636 025-5 | 086885 | Crimping machine CM 25-5 with sliding tray without crimp dies, without positioning guides | | 325x280x500 | 33,500 |
| 636 025-6 | 086892 | Crimping machine CM 25-6 with < 6 mm stroke without crimp dies, without positioning guides | | 325x280x500 | 33,500 |
| 636 025 0 29 | 017506 | Footswitch for crimping machines CM 25 | | 240x150x140 | 700 |