




Features :

- Highly reliable.
- High quality strain relief and sealing
- Good performance for standard industrial application.
- Easy assembly install cable gland – insert cable – tighten cap.



Technical Information :


Material	Brass, Nickel Plated Brass, Stainless steel
Sealing	EPDM
Clamping insert	PA 6
O ring	EPDM
Seal operating Temperature	-40°C to +100°C
Thread type	• Metric (M) ISO Pitch 1.5 (Also available with long thread length) • PG according to DIN 40430
Degree of protection	IP 68
Mechanical strength	• Dynamic strain stability • High strain relief (DIN EN 62444 Tab. 2A)
Application area	Industrial, chemical industries, petrochemical industries.

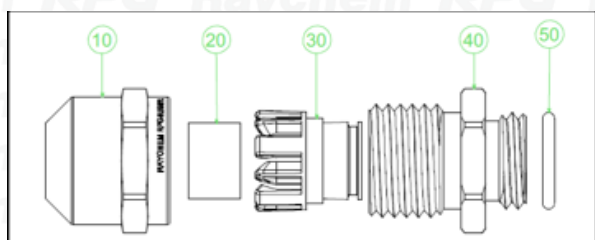

POS NO.	DESCRIPTION	MATERIAL
10	ENTRY NUT	BRASS / SS
20	SEALING RUBBER	EPDM
30	PLASTIC INSERT	POLYAMIDE 6
40	CONE BODY	BRASS / SS
50	O'RING	EPDM

Metric thread :

Part code	Size M	Clamping Range ØF (mm)	AF (mm)	C (mm)	D (mm)
RESM-12	M 12 x 1,5	3.0 – 7.0	16	23 – 30	5
RESM-16	M 16 x 1,5	4.5 – 10.0	20	26 – 34	5
RESM-20	M 20 x 1,5	6.0 – 13.0	24	29 – 37	6
RESM-25	M 25 x 1,5	9.0 – 17.0	29	33 – 42	7
RESM-32	M 32 x 1,5	13.0 – 21.0	36	36 – 44	8
RESM-40	M 40 x 1,5	16.0 – 28.0	46	44 – 55	8
RESM-50	M 50 x 1,5	21.0 – 35.0	55	51 – 62	9
RESM-63	M 63 x 1,5	34.0 – 48.0	68	56 – 67	10
RESM-75	M 75 x 1,5	48.0 – 62.0	82	67 – 81	12

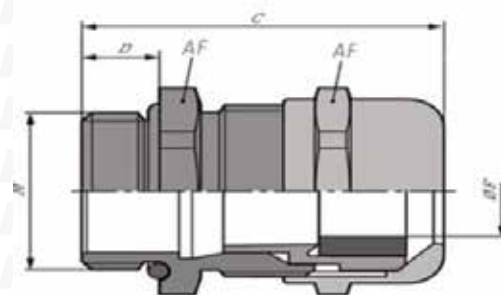

Vasai Factory

1, 62, M.G. Rd.,
Near Bharat Petroleum Pump
Off. Western Express Highway, P. Satavali
Bassein, Taluka Vasai, Dist. Palghar.

Tel. : +91 250 3057500

Email : Cableglands@raychemrpg.com

www.raychemrpg.com

Copyright 2018

All Rights Reserved to
Raychem RPG (P) Limited
V012018



(A TE-Connectivity - RPG Enterprises JV)