
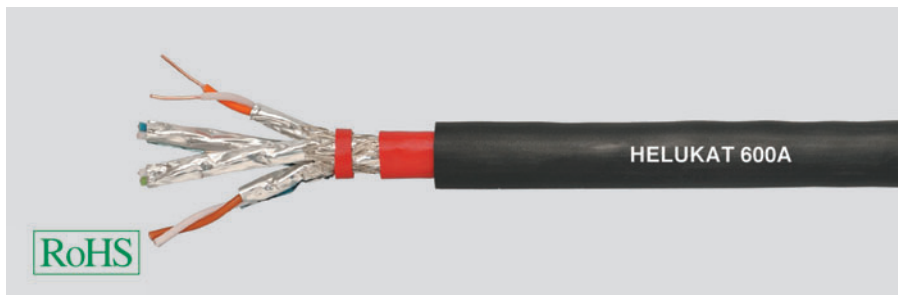


# LAN Cable Outdoor

Category 7

**HELUKAT® 600A**

S-STP PVC/PVC



## Cable structure

Inner conductor diameter:  
Conductor material:  
Core insulation:  
Core colours:  
Shielding 1:  
Inner sheath material:  
Screen over stranding element:  
Screen 1 over stranding:  
Screen 2 over stranding:  
Outer sheath material:  
Outer diameter:  
Outer sheath colour:

## S-STP 4x2xAWG 23/1 PVC/PVC

0,58 mm  
Copper, bare  
Foam-skin-PE  
wh/bu, wh/og, wh/gn, wh/bn  
-  
PVC  
Polyester foil, aluminium-lined  
Cu braid  
-  
PVC  
approx. 11,6 mm  
Black similar to RAL 9005

## Electrical data


Characteristic impedance:

100 Ohm ± 15 ohm at 1 to 100 MHz  
100 Ohm ± 20 ohm at 101 to 600 MHz  
160 Ohm/km max.  
43 nF/km nom.  
79 %

Loop resistance:

Mutual capacitance:

Rel. propagation velocity:

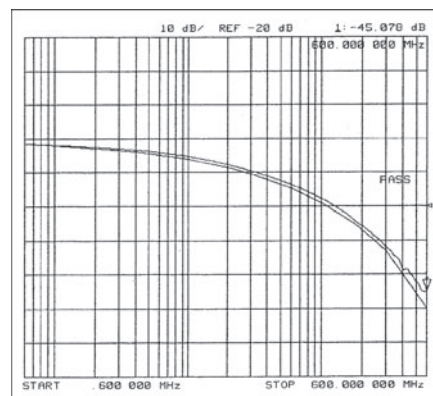

## Typical values


Frequency (MHz)	10	16	62,5	100	200	300	600
Attenuation (dB/100m)	5,8	7,4	14,6	18,4	26,2	32,1	49,0
Next (db)	85,0	85,0	85,0	85,0	83,0	80,0	80,0
ACR (db)	79,2	77,6	70,4	66,6	56,8	47,9	31,0

## Technical data

Weight: approx. 153 kg/km  
Min. bending radius for laying: 95 mm  
Operating temperature range min.: -30°C  
Operating temperature range max.: +70°C  
Caloric load, approx. value: 2,62 MJ/m  
Copper weight: 32,00 kg/km

## Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 7, Flame-retardant acc. to IEC 60332-1, Smoke density acc. to IEC 61034

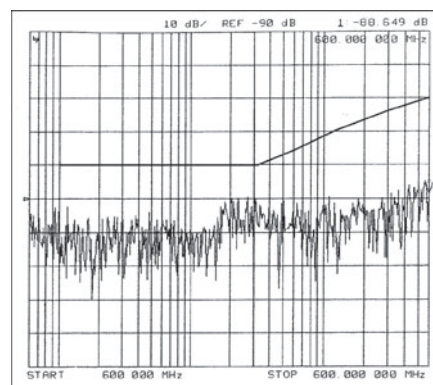

## Application

HELUKAT® 600 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. The serie of HELUKAT® 600A with a double PVC jacket is constructed especially for outdoor applications like laying at house walls or in cable lines.

## Part no.

**801147**, S-STP 4x2xAWG 23/1 PVC/PVC (S/FTP)

Dimensions and specifications may be changed without prior notice.