

SK6851 5050 addressable RGB LED strip 60LEDs/m DC24V



◆ Product Description:

5050 high brightness led, 60LEDs/M

Each LED addressable individually controlled, with voltage DC24V

SPI signal

FPC color: white, 1+2 OZ copper thickness FPC


Standard length 5m per roll, the length also can be customized




◆ Product Datasheet

Product Number	S012060CC3SE8	Luminance/M	R: 51 G:130 B:31lm
Operating Voltage	DC24V	Ra	/
Power/M	7W	Beam Angle	120°
SMD Type	SMD5050	Size (mm)	5000 * 12mm
LED Qty/M	60	IP Rate	IP20/IP64/IP65/IP67
Color	RGB	Operation Temperature	- 25 ~ 60 °C
Pixel/M	60	Material	FPC
Control	SPI/SK6851	Cutting Length	100mm
Wavelength	R:615-630 G:520-535 B:450-460nm	Net Weight/Roll	/


◆ Outline Dimension (unit)mm:

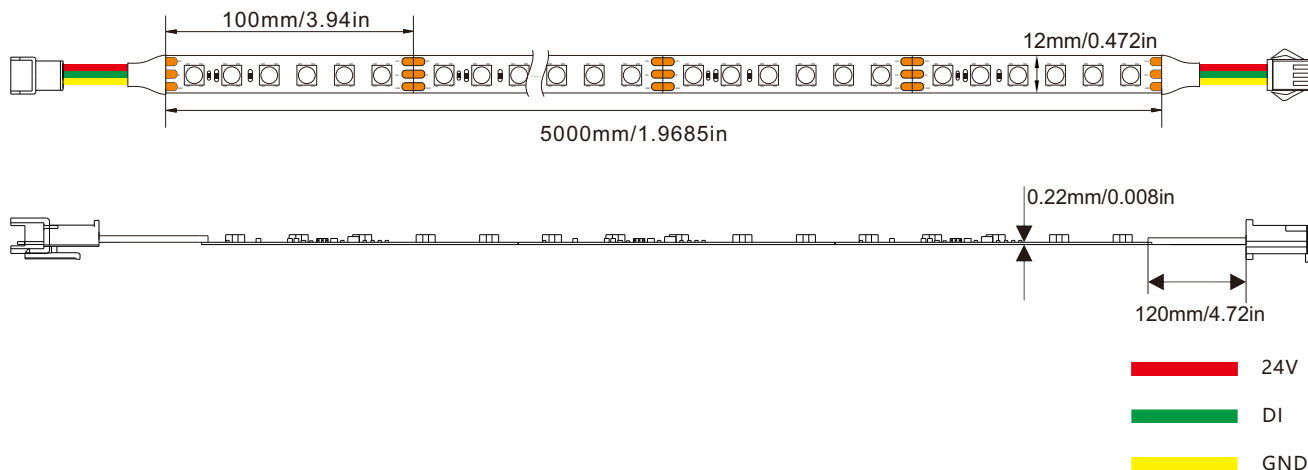

◆ Wiring diagram

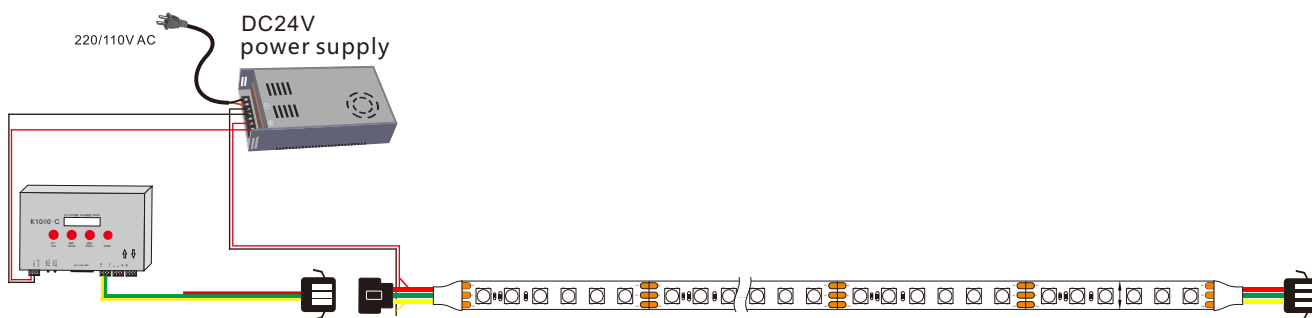

◆ Strip IP Rate

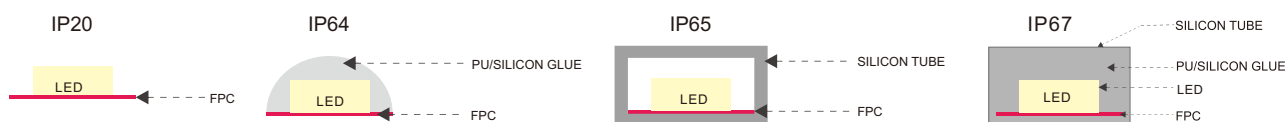

◆ Accessories



Screw




Silicone clip




End cap

◆ Schematic diagram of maximum bending prevention

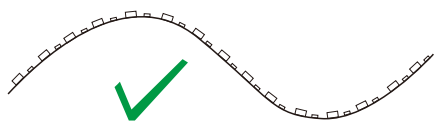

Correct bending method



Wrong way

Note: The parameters are subject to change without notice!