


U.I. Lapp GmbH	PRODUCT INFORMATION	
	SILVYN® EL	12.09.2012

Easy assembly of cables and wires
 Bendable
 Crush-resistant
 A fully insulated system when used in combination with SILVYN® MPC/MPC-M



Application range

Mechanical engineering
 Vehicle construction
 Vending machine construction
 Exporters

Design

Integrated hard PVC spiral
 Soft PVC outer sheath

Approvals (Norm references)

UL FILENUMBER E308201

Note

On request

Product features

Flexible
 Smooth inner wall
 Dimensionally stable

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Colour delivered:	Silver grey (RAL 7001)
Material:	Special soft PVC sheath with hard PVC spiral
Temperature range:	-20°C to +70°C


Product Management	Document: LAPP_PRO1135EN.pdf	1 / 3
--------------------	------------------------------	-------




SILVYN® EL

12.09.2012

Part number	Internal Ø x external Ø (mm)	Bending radius (mm)	Inner Ø (mm)	Suitable for SILVYN® MPC-M/MPC 90° M	Suitable for SILVYN® MPC	Suitable for SILVYN® MPC 90°	PU ring (m)
SILVYN® EL							
61747360	10 x 14,7	20	10	16 x 1,5	9	9	30.0
61747370	12 x 16,6	25	12	16 x 1,5	11/13,5	11/13,5	30.0
61747380	16 x 20,7	30	16	20 x 1,5	13,5/16	13,5/16	30.0
61747390	22 x 27,7	40	22	25 x 1,5	21	21	30.0
61747400	25 x 30,6	45	25	32 x 1,5	29	29	30.0
61747410	28 x 33,5	50	28	32 x 1,5	29	29	30.0
61747420	35 x 41	60	35	40 x 1,5	36	36	30.0
61747430	40 x 46,4	70	40	50 x 1,5	48		30.0
61747440	50 x 57,2	85	50	63 x 1,5	48		30.0

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
SILVYN® EL		12.09.2012

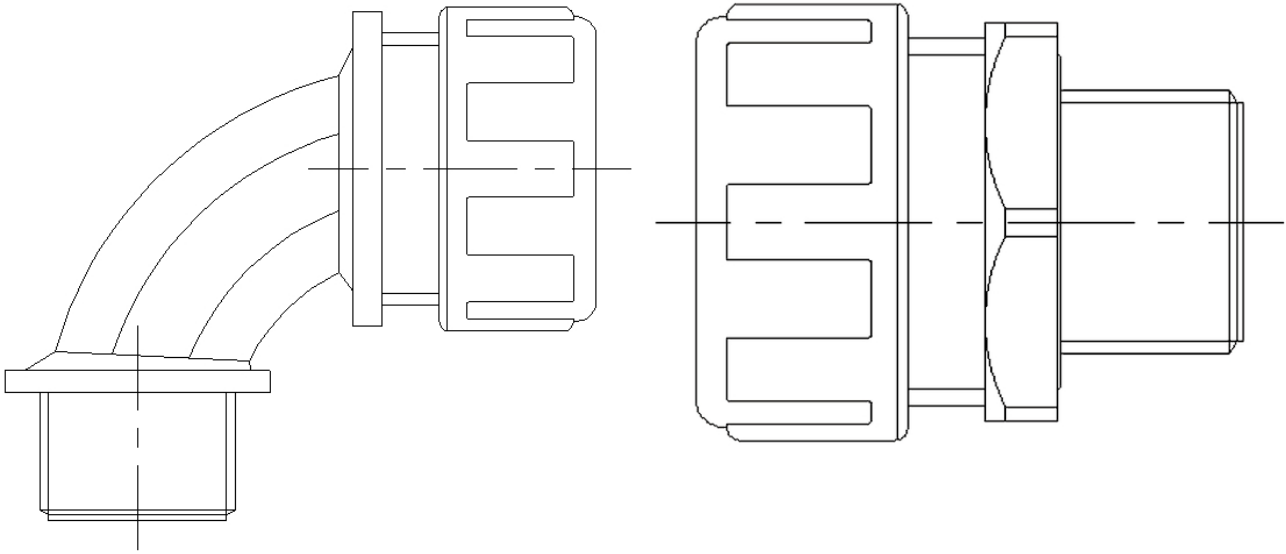

Product Management	Document: LAPP_PRO1135EN.pdf	3 / 3
--------------------	------------------------------	-------