


SILVYN® USK

SILVYN® USK - PG threaded conduit fitting



Assembly time

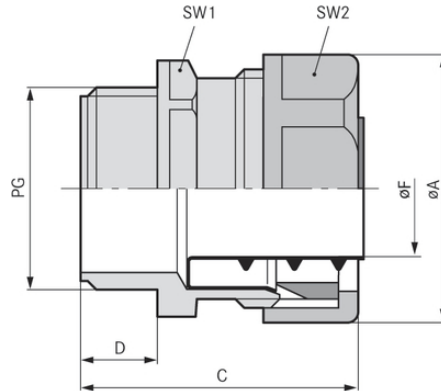

Maximum vibration protection

Benefits

- Fast and easy assembly
- Vibration protection
- No extra parts necessary

Application range

- In combination with protective conduit
- SILVYN® FPS/ FD-PU
- SILVYN® SP/SP-PU
- Indoor applications
- Light mechanical stress

Product features

- Large wrench sizes

Product Make-up

- PG connection thread
- Hexagonal collar
- Threaded sleeve
- Cap nut

Note

Included: SILVYN® EE-K inner sleeve

SILVYN® USK**Technical Data**

Classification:	ETIM 5.0 Class-ID: EC001178 ETIM 5.0 Class-Description: Screw connection for protective plastic hose
Colour delivered:	Silver grey (RAL 7001)
Material:	PP
Protection rating:	IP 54
Temperature range:	-10°C to +110°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SILVYN® USK**

Article number	PG size	SW 1/2 mm	Overall length mm	Thread length mm	Clear opening (mm)	Suitable for SILVYN® FD-PU/FPS	Suitable for SILVYN® SP/SP-PU
SILVYN® USK							
52005810	7	16 / 18	40	10	6	7 x 10	-
52005820	9	21 / 23	41	10	9	10 x 14	10 x 14
52005830	11	24 / 27	41	10	11	13 x 17	12 x 16
52005840	13.5	26 / 29	41	10	13	15 x 19	14 x 18
52005850	16	29 / 32	42	11	14.5	16 x 21	16 x 20
52005860	21	36 / 40	48	11	19.5	22 x 27	22 x 27
52005870	29	45 / 49	48	12	27	29 x 36	30 x 36
52005880	36	53 / 58	48	12	36	38 x 45	38 x 44
52005900	48	65 / 70	57	15	46	48 x 56	49 x 56

Last Update (11.07.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.deYou can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16