


SKINDICHT® MINI NBR

SKINDICHT® MINI, cable gland for the smallest conductor sizes and high packing density, gentle cable clamping and high degree of protection



Space requirement

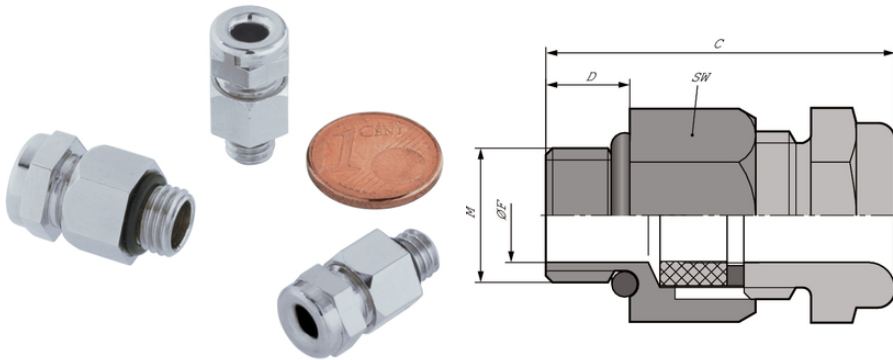

Automation & fast installation

Benefits

- High degree of protection
- For the smallest conductor sizes
- Low height
- Gentle cable clamping
- High packing density

Application range

For use wherever there is limited assembly space.
Sensors
Measurement and control technology

Technical Data

Classification:

ETIM 5.0 Class-ID: EC000441

ETIM 5.0 Class-Description: Cable screw gland

Caution:

Recommendation of torque

M 6 x 1 1.5 Nm

M 8 x 1 3.0 Nm

Material:

Body: Nickel-plated brass

Sealing: CR/NBR

Protection rating:

IP 66

IP 68 - 5 bar

Temperature range:

-20°C to +100°C

Last Update (22.06.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINDICHT® MINI NBR**Note**

Photographs are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINDICHT® MINI NBR**

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)	Clear opening F (mm)
SKINDICHT® MINI NBR						
52001860	MINI 6 x 1	2 - 3	9	19.7	5	3
52001880	MINI 8 x 1	3.5 - 5.5	11	20.5	5	5.5
52001895	MINI 10 x 1	5 - 7	14	22.3	5	7.4
SKINDICHT® MINI counter nut						
52102998	MINI 6 x 1	-	10	11.2	3.1	
52102997	MINI 8 x 1	-	13	14.4	3.9	
52102996	-					

Last Update (22.06.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16