


SKINDICHT® MINI FKM

SKINDICHT® MINI, cable gland for the smallest conductor sizes and high packing density, gentle cable clamping and high degree of protection

Info

For high temperature ranges up to max. +200 °C

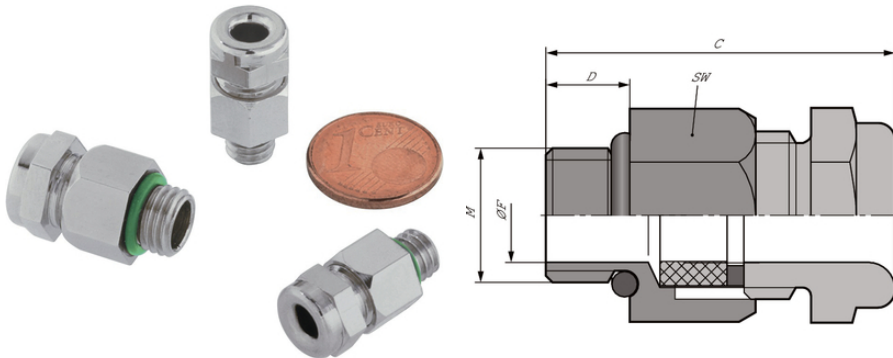

Temperature-resistant



Acid-resistant



Robust



Space requirement



Heat-resistant



Good chemical resistance



Automation & fältinstallation

Benefits

High degree of protection

For the smallest conductor sizes

Low height

Gentle cable clamping

High packing density

SKINDICHT® MINI FKM

Application range

For use wherever there is limited assembly space.

Sensors

Measurement and control technology

Product features

Suitable for high temperature and aggressive media surroundings

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable screw gland
Caution:	Recommendation of torque M 6 x 1 1.5 Nm M 8 x 1 3.0 Nm
Material:	Body: Nickel-plated brass Sealing: FKM
Protection rating:	IP 66 IP 68 - 5 bar
Temperature range:	-20°C up to +200°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.



SKINDICHT® MINI FKM

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)	Clear opening F (mm)
52001889	MINI 6 x 1	2 - 3	9	19.7	5	3
52001887	MINI 8 x 1	3.5 - 5.5	11	20.5	5	5.5
52001894	MINI 10 x 1	5 - 7	14	22.3	5	7.4

Last Update (23.06.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16