
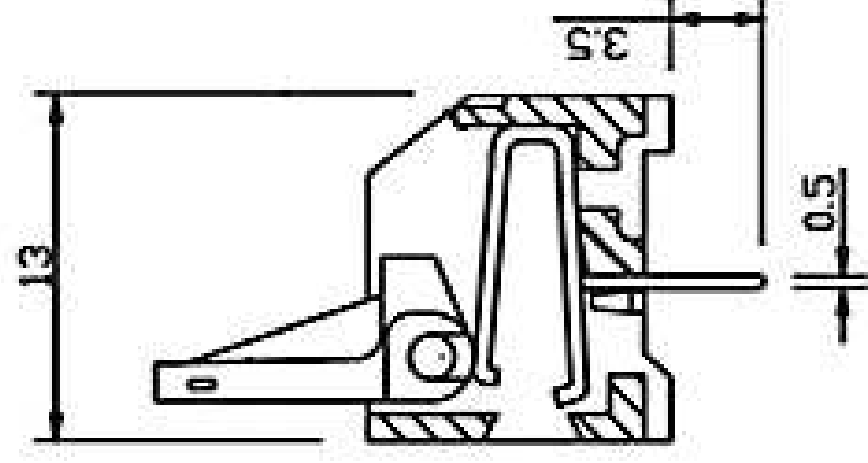
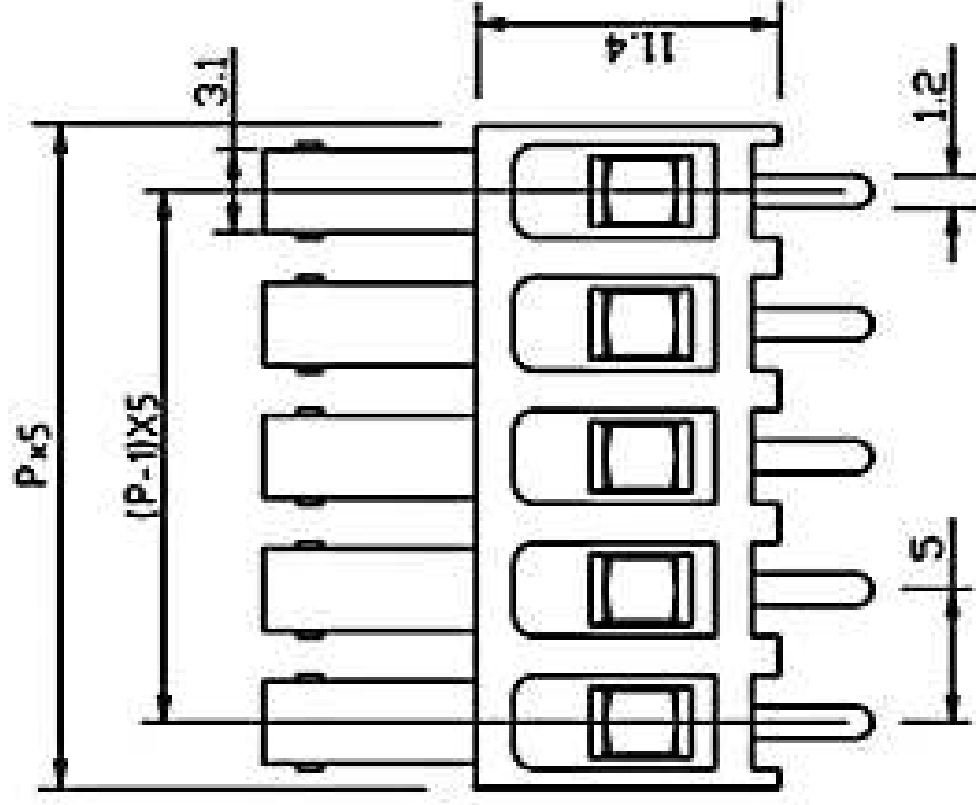


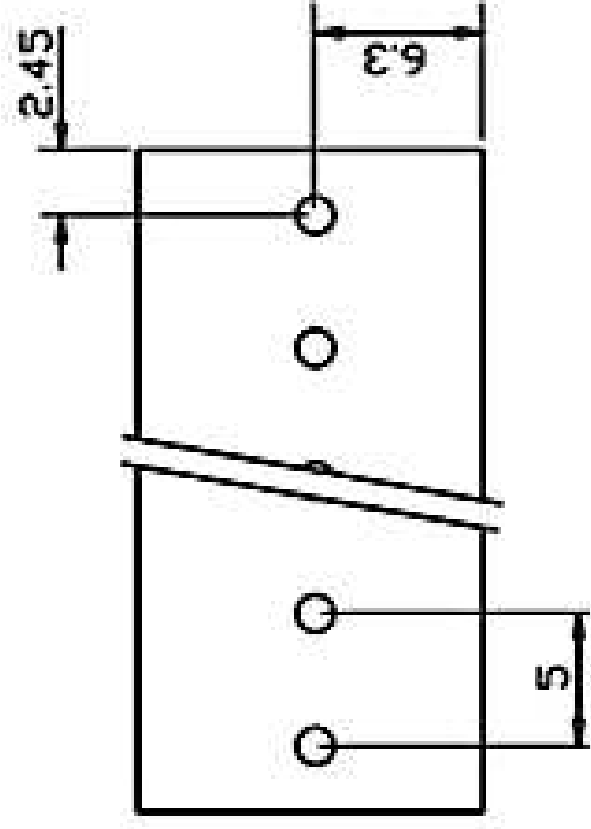

p = Number of poles

Specifications

Voltage rating	250VAC
Current rating	11A
Wire range(AWG)	18-22
Withstanding voltage	2KVAC
Operation temperature	-55°C to +100°C
Insulation resistance	>1000MΩ or more at 500VDC

Materials

Housing : Polyamide 66 (UL 94V-0), green
 Lever : Polyamide 66 (UL 94V-0), white
 Terminals : Brass, tin plated