


PIN ASSIGNMENT:

	BK	RD	GR	YL
P1:	2	3	4	5
P2:	5	4	3	2
	BK	RD	GR	YL

DESIGNATION	SIZE/L	Jacket Colour
TEL-RJ11-WH/05	5000 ± 50MM	WH
TEL-RJ11-WH/10	10000 ± 60MM	WH
TEL-RJ11-WH/20	20000 ± 100MM	WH
TEL-RJ11-WH/02	2000 ± 10MM	WH
TEL-RJ11-BK/05	5000 ± 50MM	BK
TEL-RJ11-WH/15	15000 ± 100 MM	WH
TEL-RJ11-BK/01	1000 ± 30 MM	BK
TEL-RJ11-BK/10	10000 ± 50 MM	BK
TEL-RJ11-BK/07	7000 ± 50 MM	BK
TEL-RJ11-WH/07	7000 ± 50 MM	WH

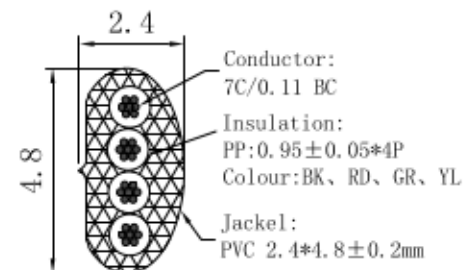

SECTION A-A

1	Cable (0.11BC/7C+PP0.95)*4F+PVC OD:2.4*4.8 ± 0.2MM	A/R	M								
2	Connector RJ11 6P4C FU	2	PCS								
3				TOLERANCE OTHERWISE UNLESS SPECIFIED		DRAWING:	曾洪彬	MCXH			
4				UP TO 5	±0.2	REVIEW:		CLIENT	TME		
5				ABOVE 5—30	±0.3	APPROVED:		NUMBER			
6				ABOVE 30—50	±0.4						
备注:				ABOVE 50	±0.5						
NO	Description	Q'TY	Units	ANGLE	±3°	DATE	2014-01-07	SCALE	FREE	UNIT	MM